

# First Order Filter Based Current-Mode Sinusoidal Oscillators Using Current Differencing Transconductance Amplifiers (CDTAs)

S. Summart, C. Saetiaiw, T. Thosdeekoraphat, C. Thongsopa

**Abstract**—This article presents new current-mode oscillator circuits using CDTAs which is designed from block diagram. The proposed circuits consist of two CDTAs and two grounded capacitors. The condition of oscillation and the frequency of oscillation can be adjusted by electronic method. The circuits have high output impedance and use only grounded capacitors without any external resistor which is very appropriate to future development into an integrated circuit. The results of PSPICE simulation program are corresponding to the theoretical analysis.

**Keywords**—Current-mode, Quadrature Oscillator, Block Diagram, CDTA.

## I. INTRODUCTION

THE current design of the active building block (ABB) devices begins the role as being used in analog technology and analog signal processing. Therefore, ABB has been developed to be used as a pawn in the designed circuit, which is suitable for a class of analog signal processing for voltage-mode and current-mode technique. The filter and oscillator circuits are important in electrical and electronic engineering. These circuits have been widely implemented such as, telecommunication system, measuring tool systems, and signal processing for instance. Consequently, a lot of filter and oscillator circuits are needed to be introduced with modern active building blocks. Recently, circuits designed using block diagram/signal flow graph have been recommended in convenience for designing [1], [2]. In the last decade, a lot of papers in electronic circuit design have been presented in current-mode technique. It is stated that the circuit designed from current-mode technique provides advantages, such as, larger dynamic range, inherently wide bandwidth, higher slew-rate, greater linearity and low power consumption [3], [4].

From literature survey, it is found that several implementations of oscillators and quadrature oscillators using active building block, have been reported [4]-[20]. Unfortunately, these reported circuits suffer from one more of weaknesses. For example, the proposed circuits use floating capacitor [5]-[7], [9], [15], which is not convenient for further fabrication in integrated circuits [21]. The external resistors are excessively used [4]-[7], [9]-[11], [13]-[15], [17]-[20], as well as, the condition of oscillation and the frequency of

oscillation cannot be adjusted by electronic method [4]-[7], [9]-[11], [13]-[15], [17]-[20]. Moreover, output impedances are not high, that make the circuit cannot directly drive load [12], [14], [16], [20].

The purpose of this paper is to present the current-mode oscillator circuits using CDTAs which is designed from new block diagram. The block diagram consists of current-mode first order high-pass and low-pass filters which are cascade connection. The oscillator circuits consist of two CDTAs and two grounded capacitors. The proposed oscillator circuits have high output impedance appropriate for cascade connection application in current mode technique which is capable to directly drive load. The circuits use only grounded capacitors without addition external resistors. This qualification is convenient for further fabrication in integrated circuits [22]-[23]. Accordingly, the PSPICE simulation program results are in correspondence with the theoretical analysis.

## II. BASIC CONCEPT OF CDTA

In 2003, there was a new active building block namely current differencing transconductance amplifier (CDTA) presented for analog signal processing suitable for voltage-mode and current-mode techniques [24]. The characteristics of the ideal CDTA are represented by the following hybrid matrix:

$$\begin{bmatrix} V_p \\ V_n \\ I_z \\ I_x \end{bmatrix} = \begin{bmatrix} 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 1 & -1 & 0 & 0 \\ 0 & 0 & 0 & g_m \end{bmatrix} \begin{bmatrix} I_p \\ I_n \\ V_x \\ V_z \end{bmatrix} \quad (1)$$

The symbol and equivalent circuit of the CDTA are illustrated in Figs. 1 (a) and (b), respectively. The CMOS internal construction of CDTA is shown in Fig 2.

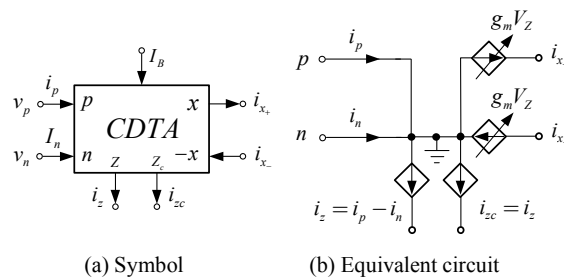


Fig. 1 CDTA

S.Summart, C.Saetiaiw, T.Thosdeekoraphat, and C.Thongsopa are with the School of Telecommunication Engineering, Suranaree University of Technology, Nakhonratchasima 30000, Thailand (e-mail: ton\_3555@hotmail.com, charinsak\_s@yahoo.co.th, thanaset@sut.ac.th, chan@sut.ac.th).

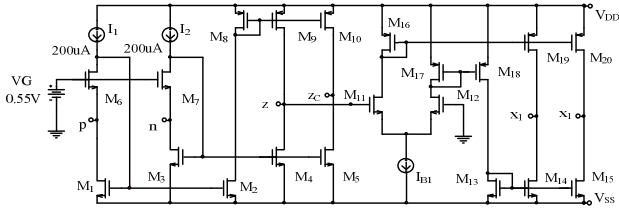


Fig. 2 Internal construction of CDTA [25]

The difference of the input currents ( $i_p$  and  $i_n$ ) flows from port  $z$ . In some applications, the  $z$  terminal of CDTA can be extended to utilize the current through  $z$  terminal which is called  $z_c$  ( $z$ -copy) [26]. For CMOS CDTA, the transconductance ( $g_m$ ) can be written as

$$g_m = \sqrt{kI_B} \quad (2)$$

where

$$k = \mu_n C_{ox} \left( \frac{W}{L} \right)_{11,12} \quad (3)$$

$k = \mu_n C_{ox} (W/L)$  is the physical parameter of CMOS transistor. Where  $\mu_n$  is the mobility of the carrier,  $C_{ox}$  is the gate-oxide capacitance per unit area,  $W$  is the effective channel width and  $L$  is the effective channel length.

### III. PROPOSED CURRENT-MODE OSCILLATORS

The proposed current-mode sinusoidal oscillator circuits designed from block diagram shown in Fig. 3. It is designed based on cascading of current-mode first order high-pass and low-pass filters.

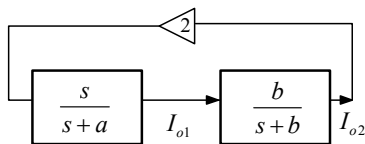


Fig. 3 Block diagram for the oscillator

From block diagram in Fig. 3, the characteristic equation of the oscillator circuit is written as


$$s^2 + s(a-b) + ab = 0 \quad (4)$$

From (4), the condition of oscillations and frequency of oscillation are written as


$$a = b \quad (5)$$

and


$$\omega_{osc} = \sqrt{ab} \quad (6)$$

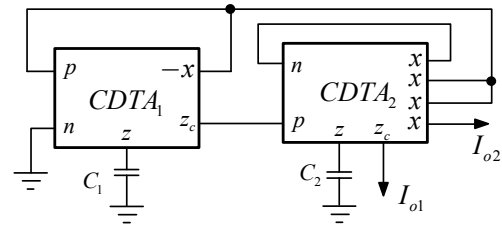

(a)

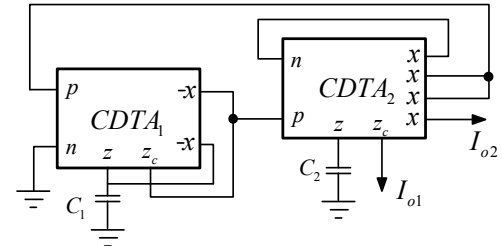

(b)

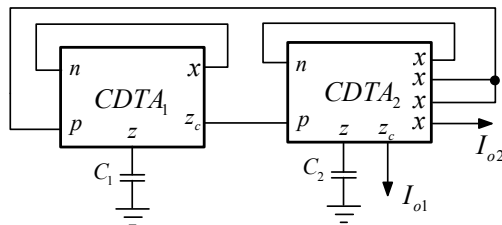

(c)

Fig. 4 Proposed current-mode oscillators

From block diagram in Fig. 3, the realization of proposed current-mode sinusoidal oscillators is achieved in Figs. 4 (a) to (c). Additionally, the characteristic equation of the proposed circuits can be written in (7).

$$s^2 + s \frac{g_{m1}C_2 - g_{m2}C_1}{C_1C_2} + \frac{g_{m1}g_{m2}}{C_1C_2} = 0 \quad (7)$$

From (7), the condition of oscillation and frequency of oscillation are written as

$$g_{m1} = g_{m2}, \quad C_2 = C_1 \quad (8)$$

and

$$\omega_{osc} = \sqrt{\frac{g_{m1}g_{m2}}{C_1C_2}} \quad (9)$$

It is found from (8) and (9) that if  $g_{mi} = \sqrt{kI_{Bi}}$ , the condition of oscillation and frequencies of oscillation are as follows:

$$I_{B1} = I_{B2}, \quad C_2 = C_1 \quad (10)$$

and

$$\omega_{osc} = \sqrt{k \frac{\sqrt{I_{B1} I_{B2}}}{C_1 C_2}} \quad (11)$$

Sensitivities of the active and passive of oscillators are shown in (12).

$$S_{C_1, C_2}^{\omega_{osc}} = -\frac{1}{2}, \quad S_{g_{m1}, g_{m2}}^{\omega_{osc}} = \frac{1}{2} \quad (12)$$

#### IV. ANALYSIS OF NON-IDEAL CASE

For non-idealities case, the characteristic equation of CDTA in (1) is written as

$$\begin{bmatrix} V_p \\ V_n \\ I_z \\ I_x \end{bmatrix} = \begin{bmatrix} 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ \alpha_p & -\alpha_n & 0 & 0 \\ 0 & 0 & 0 & \beta g_m \end{bmatrix} \begin{bmatrix} I_p \\ I_n \\ V_x \\ V_z \end{bmatrix} \quad (13)$$

The parameters  $\alpha_p$ ,  $\alpha_n$  and  $\beta$  are the voltage/current transfer deviated from one, depending on the value of intrinsic impedances and temperatures. In non-ideal case the characteristic equation, the condition of oscillation and the frequency of oscillation from (7) to (9) are as follows:

**Circuit 4(a):**

$$\left\{ \begin{aligned} & s^2 + s \left( \frac{C_1 \beta_2 \alpha_{n2} g_{m2} + C_2 \beta_1 \alpha_{p1} g_{m1} - 2C_1 \beta_2 \alpha_{p1} \alpha_{p2} g_{m2}}{C_1 C_2} \right) \\ & + \frac{\beta_1 \beta_2 \alpha_{p1} \alpha_{n2} g_{m1} g_{m2}}{C_1 C_2} \end{aligned} \right\} = 0 \quad (14)$$

$$C_1 \beta_2 \alpha_{n2} g_{m2} + C_2 \beta_1 \alpha_{p1} g_{m1} = 2C_1 \beta_2 \alpha_{p1} \alpha_{p2} g_{m2} \quad (15)$$

and

$$\omega_{osc} = \sqrt{\frac{\beta_1 \beta_2 \alpha_{p1} \alpha_{n2} g_{m1} g_{m2}}{C_1 C_2}} \quad (16)$$

**Circuit 4(b):**

$$\left\{ \begin{aligned} & s^2 + s \left( \frac{C_1 \beta_2 \alpha_{n2} g_{m2} + C_2 \beta_1 g_{m1} - 2C_1 \beta_2 \alpha_{p1} \alpha_{p2} g_{m2}}{C_1 C_2} \right) \\ & + \frac{\beta_1 \beta_2 \alpha_{n2} g_{m1} g_{m2}}{C_1 C_2} \end{aligned} \right\} = 0 \quad (17)$$

$$C_1 \beta_2 \alpha_{n2} g_{m2} + C_2 \beta_1 g_{m1} = 2C_1 \beta_2 \alpha_{p1} \alpha_{p2} g_{m2} \quad (18)$$

and

$$\omega_{osc} = \sqrt{\frac{\beta_1 \beta_2 \alpha_{n2} g_{m1} g_{m2}}{C_1 C_2}} \quad (19)$$

**Circuit 4(c):**

$$\left\{ \begin{aligned} & s^2 + s \left( \frac{C_1 \beta_2 \alpha_{n2} g_{m2} + C_2 \beta_1 \alpha_{n1} g_{m1} - 2C_1 \beta_2 \alpha_{p1} \alpha_{p2} g_{m2}}{C_1 C_2} \right) \\ & + \frac{\beta_1 \beta_2 \alpha_{n1} \alpha_{n2} g_{m1} g_{m2}}{C_1 C_2} \end{aligned} \right\} = 0 \quad (20)$$

$$C_1 \beta_2 \alpha_{n2} g_{m2} + C_2 \beta_1 \alpha_{n1} g_{m1} = 2C_1 \beta_2 \alpha_{p1} \alpha_{p2} g_{m2} \quad (21)$$

and

$$\omega_{osc} = \sqrt{\frac{\beta_1 \beta_2 \alpha_{n1} \alpha_{n2} g_{m1} g_{m2}}{C_1 C_2}} \quad (22)$$

#### V. ANALYSIS OF THE PARASITIC RESISTANCES AND CAPACITANCES

The parasitic resistances and capacitances of the CDTA can be shown in Fig. 5. If the parasitic resistances at the  $z$  and  $x$  terminals are much greater than the parasitic resistances at  $p$  and  $n$  terminals ( $R_z, R_x \gg R_p, R_n$ ), in this case, the characteristic equation, the condition of oscillation and the frequency of oscillation of the current-mode sinusoidal oscillators, from (7) to (9) are represented as follows:

**Circuit 4(a) and 4(c):**

$$\left\{ \begin{aligned} & s^2 + s \frac{g_{m1}(C_2 + C_{z2}) - g_{m2}(C_1 + C_{z1})}{(C_1 + C_{z1})(C_2 + C_{z2})} \\ & + \frac{g_{m1} g_{m2}}{(C_1 + C_{z1})(C_2 + C_{z2})} \end{aligned} \right\} = 0 \quad (23)$$

$$g_{m1}(C_2 + C_{z2}) = g_{m2}(C_1 + C_{z1}) \quad (24)$$

and

$$\omega_{osc} = \sqrt{\frac{g_{m1} g_{m2}}{(C_1 + C_{z1})(C_2 + C_{z2})}} \quad (25)$$

**Circuit 4(b):**

$$\left\{ \begin{aligned} & s^2 + s \frac{g_{m1}(C_2 + C_{z2}) - g_{m2}(C_1 + C_{z1} + C_{x1})}{(C_1 + C_{z1} + C_{x1})(C_2 + C_{z2})} \\ & + \frac{g_{m1} g_{m2}}{(C_1 + C_{z1} + C_{x1})(C_2 + C_{z2})} \end{aligned} \right\} = 0 \quad (26)$$

$$g_{m1}(C_2 + C_{z2}) = g_{m2}(C_1 + C_{z1} + C_{x1}) \quad (27)$$

and

$$\omega_{osc} = \sqrt{\frac{g_{m1} g_{m2}}{(C_1 + C_{z1} + C_{x1})(C_2 + C_{z2})}} \quad (28)$$

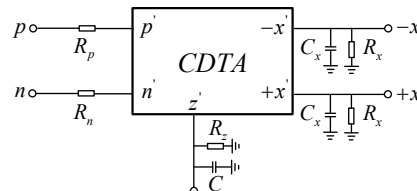


Fig. 5 The parasitic resistances and capacitances of the CDTA

## VI. SIMULATION RESULTS

To verify the theoretical prediction of the proposed current-mode oscillators in Fig. 4, (for example, proposed oscillator in Fig. 4 (c)) the PSPICE simulation was built with  $C_1 = C_2 = 0.3\text{nF}$ ,  $I_{B1} = I_{B2} = 250\mu\text{A}$ . The CMOS implementation of the internal construction of CDTA used in simulation is shown in Fig. 2. The PMOS and NMOS transistors employed in the proposed circuit were simulated by using the parameters of  $0.35\mu\text{m}$  TSMC CMOS technology [27]. In addition, the ratio of dimension of the transistors PMOS and NMOS is shown in Table I.

TABLE I  
DIMENSIONS OF CMOS TRANSISTORS

Transistor	W( $\mu\text{m}$ )	L( $\mu\text{m}$ )
M1-M10	20.00	1.00
M11-M12	40.00	1.00
M13-M15	3.00	1.00
M16	5.00	1.00
M17	5.35	1.00
M18-M20	6.40	1.00

The circuit was biased with  $\pm 1.6\text{V}$  supply voltages. This yields oscillation frequency of 715.358 kHz, where the calculated value of this parameter from (11) yields 749.586 kHz (deviated by 4.785%). In this case, value of the parameter changed because the CMOS implementation used in the circuit deviated from the non-ideal properties and the effect of parasitic elements. Figs. 6 and 7 show the simulated quadrature output waveforms during initial state and steady state, respectively. Fig. 8 shows the simulation result of output spectrum. The total harmonic distortion (THD) of  $I_{o1}$  and  $I_{o2}$  are about 1.488% and 0.662%, respectively. In addition, the phase difference of the output current  $I_{o1}$  and  $I_{o2}$  are approximately 89.75 degrees. The generated waveforms relationship within oscillator circuit has been verified by Lissagous Figure, shown in Fig. 9.

## VII. CONCLUSION

The current-mode oscillators have been introduced in this paper. The proposed current-mode oscillators consists of two CDTAs and two grounded capacitors, the condition of oscillation and frequency of oscillation can be electronically controlled by adjusting the bias currents of the CDTA. The proposed circuits use only grounded capacitors without addition external resistor which are very appropriate for further development into integrated circuits. Additionally, this paper also presents block diagram designed for signal generating oscillation application for other active devices. The designed block diagram is easy for application because it uses only first order high-pass filter and low-pass filter which is cascade connection. PSPICE simulations are included to verify the theoretical analysis.

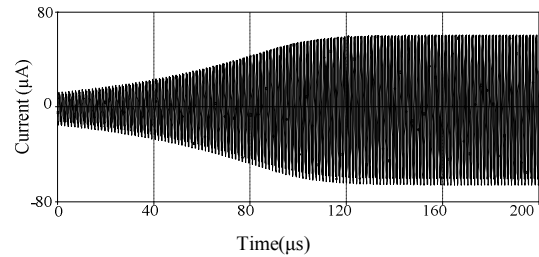


Fig. 6 The simulation result of output waveforms during initial state

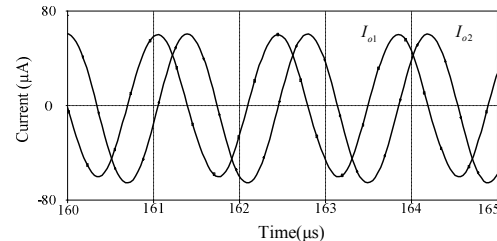


Fig. 7 The quadrature output waveforms in steady state

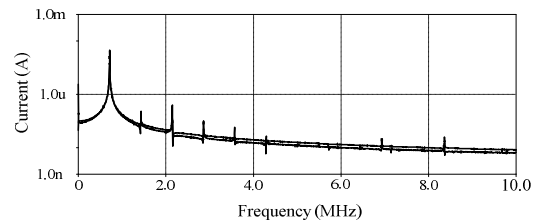


Fig. 8 The output frequency spectrum

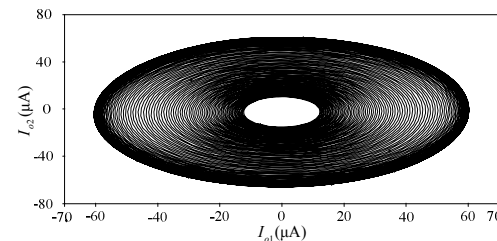


Fig. 9 Lissagous figure

## ACKNOWLEDGMENTS

This work was supported by Suranaree University of Technology (SUT) and by the Office of the Higher Education under NRU project of Thailand.

## REFERENCES

- [1] W.J. Kerwin, L.P. Huelsman, and R.W. Newcomb, "State-variable synthesis for insensitive integrated circuit transfer functions," *IEEE Journal of Solid-State Circuits*, vol. 2, pp. 87-92, 1967.
- [2] C. Sakul, W. Jaikla, and K. Dejhan, "New resistorless current-mode quadrature oscillators using 2 CCCDTAs and grounded capacitors," *Radioengineering*, vol. 20, pp. 890-897, 2011.
- [3] C. Toumazou, F.J. lidgey, and D.G. haigh, *Analogue IC design: the current-mode approach*, Stevenage (UK): Peter Peregrinus, 1990.
- [4] T. Thosdeekoraphat, S. Summart, C. Saetiaw, S. Santalunai, and C. Thongsopa, "CCTAs based current-mode quadrature oscillator with high

- output impedances," *International Journal of Electronics and Electrical Engineering*, vol. 1, 2013, pp. 52-56.
- [5] J. JIN, and C. WANG, "Current-mode four-phase quadrature oscillator using current differencing transconductance amplifier based first-order allpass filter," *Revue Roumaine Des Sciences Techniques*, 2012, pp. 291-300.
- [6] A. Uygur, and H. Kuntman, "CDTA-based quadrature oscillator design," *14th European Signal Processing Conference (EUSIPCO 2006)*, 2006, pp. 4-8.
- [7] D. Prasad, D. Bhaskar, and A. Singh, "Realisation of single-resistance-controlled sinusoidal oscillator: a new application of the CDTA," *WSEAS Transactions on Electronics*, vol. 5, pp. 257-259, 2008.
- [8] S. Maheshwari, "Electronically tunable quadrature oscillator using translinear conveyors and grounded capacitors," *Active and Passive Elec. Comp.*, vol. 26, pp. 193-196, 2003.
- [9] A. U. Keskin, and D. Biolek, "Current mode quadrature oscillator using current differencing transconductance amplifiers (CDTA)," *IEE Proceedings Circuits Devices and Systems*, vol. 153, pp. 214-218, 2006.
- [10] M. Kummger, and K. Dejhan, "Electronically tunable current-mode quadrature oscillator using current differencing transconductance amplifiers," *IEEE Region 10 Conference (TENCON 2009)*, 2009, pp. 1-4.
- [11] D. Biolek, A. Keskin, and V. Biolkova, "Grounded capacitor current mode single resistance-controlled oscillator using single modified current differencing transconductance amplifier," *Circuits, Devices & Systems, IET*, vol. 4, pp. 496-502, 2010.
- [12] W. Jaikla, and M. Siripruchyanan, "A versatile quadrature oscillator and universal biquad filter using dual-output current controlled current differencing transconductance amplifier," *International Symposium on Communications and Information Technologies (ISCIT'06)*, 2006, pp. 1072-1075.
- [13] M. T. Abuelma'atti, and H. A. Al-Zaher, "Current-mode sinusoidal oscillators using single FTFN," *IEEE Transactions on Circuits and Systems II: Analog and Digital Signal Processing*, vol. 46, pp. 69-74, 1999.
- [14] D. Prasad, and D. Bhaskar, "Electronically controllable explicit current output sinusoidal oscillator employing single VDFTA," *ISRN Electronics*, vol. 2012, pp. 1-5, 2012.
- [15] W. Jaikla, M. Siripruchyanun, J. Bajer, and D. Biolek, "A simple current-mode quadrature oscillator using single CDTA," *Radioengineering*, vol. 17, pp. 33-40, 2008.
- [16] W. Jaikla, and M. Siripruchyanun, "CCCDTAs-based versatile quadrature oscillator and universal biquad filter," *The Proceedings of ECTI con 2007*, 2007, pp. 1065-1068.
- [17] S. Maneewan, B. Sreewirote, and W. Jaikla, "A current-mode quadrature oscillator using a minimum number of active and passive components," *IEEE International Conference on Vehicular Electronics and Safety (ICVES)*, 2011, pp. 312-315.
- [18] T. Bumrongchoke, D. Duangmalai, and W. Jaikla, "Current differencing transconductance amplifier based current-mode quadrature oscillator using grounded capacitors," *International Symposium on Communications and Information Technologies (ISCIT)*, 2010, pp. 192-195.
- [19] A. Lahiri, "Explicit-current-output quadrature oscillator using second-generation current conveyor transconductance amplifier," *Radioengineering*, vol. 1, pp. 522-526, 2009.
- [20] R. Šotner, Z. Hruboš, B. Ševčík, J. Slezák, J. Petrzela, and T. Dostál, "An example of easy synthesis of active filter and oscillator using signal flowgraph modification and controllable current conveyors," *Journal of Electrical Engineering*, vol. 62, pp. 258-266, 2011.
- [21] E. Yuçe, and S. Minaei, "A modified CFOA and its applications to simulated inductors, capacitance multipliers, and analog filters," *IEEE Transactions on Circuits and Systems I: Regular Papers*, vol. 55 pp. 266-275, 2008.
- [22] M. Bhushan, and R. Newcomb, "Grounding of capacitors in integrated circuits," *Electronics Letters*, vol. 3, pp. 148-149, 1967.
- [23] A. M. Soliman, "New grounded capacitor current mode band-pass low-pass filters using two balanced output ICCII," *Journal of Active and Passive Electronic Devices*, vol. 3, pp. 175-184, 2008.
- [24] D. Biolek, "CDTA—building block for current-mode analog signal processing," *Proceedings of the European conference on circuit theory and design*, 2003, pp. 397-400.
- [25] M. Somdunyanok, M. Siripruchyanun, and P. Prommee, "CMOS multiple-output CDTA and its applications," *Proceedings of the 1st*

*International Conference on Technical Education (ICTE2009)*, 2009, pp. 184-187.

- [26] D. Biolek, V. Biolkova, and Z. Kolka, "Single-CDTA (current differencing transconductance amplifier) current-mode biquad revisited," *WSEAS Transactions on Electronics*, vol. 5, pp. 250-256, 2008.
- [27] E. Yuçe, S. Tokat, A. Kızılkaya, and O. Cicekloglu, "CCII-based PID controllers employing grounded passive components," *International Journal of Electronics and Communications (AEU)*, vol. 60, pp. 399-403, 2006.



**S. Summart** received the B. Tech. Ed. degree in Telecommunication Engineering from Rajamangala Institute of Technology Khonkaen Campus (RITKK) in 2002 and Master of Tech. Ed. in electrical technology from King Mongkut's University of Technology North Bangkok (KMUTNB) in 2008. Now, he is working toward Ph.D. in Telecommunication Engineering at Suranaree University of Technology (SUT). He has been with Electronic Program, Electronic Division, Northeastern Technology College, KhonKaen, Thailand since 2007. His research interests include electronic communications, analog signal processing and analog integrated circuit.



**C. Saetiw** received the B.Eng. degrees in Telecommunication Engineering from Suranaree University of Technology and M.Eng. degrees in Telecommunication Engineering from Suranaree University of Technology in 1997 and 2007, respectively. He is currently working toward the Ph.D. degree in Telecommunication Engineering of Suranaree University of Technology. His research focuses on antennas systems for several applications.



**T. Thosdeekoraphat** received the B.Eng and M.Eng. degrees in telecommunication engineering from Suranaree University of Technology in 2006 and 2008, respectively. At present, I'm Studying doctoral's degree in telecommunication engineering at Suranaree University of Technology. Research interests include hyperthermia inductive heating, induction heating, RF circuit design, antenna, active antenna and UWB transmitter-receiver design and analysis of impulse signal for UWB communication system.



**C. Thongsopa** B.Eng (1'Hons) Electronics Engineering, King Mongkut's Institute of Technology Ladkrabang (KMUTL), Thailand, M.Eng. (Electrical and Communications Engineering), Kasetsart University, Thailand and D.Eng.(Electrical Engineering), King Mongkut's Institute of Technology Ladkrabang (KMUTL), Thailand in 1992, 1996 and 2002, respectively. Experiences & Expert are RF circuit design, active antenna, Microwave heating application in 1992-1997 Researcher at Aeronautical Radio of Thailand Company Design Systems Air Traffic control: Design transmitters VHF-UHF (AM) 25W (on 24 Hour) and Design Transmitters HF (AM) 1KW (on 24 Hour). Furthermore, Researcher at National Electronics and Computer Technology Center (NECTEC) and consultant of SDH project at Telephone Organization of Thailand (TOT) design RF circuit in 1997-2000.