

Numerical Calculation of Coils Filled With Bianisotropic Media

Nebojsa B. Raicevic, Teodoros S. Prokic, Vladan Golubovic

Abstract—Recently, bianisotropic media again received increasing importance in electromagnetic theory because of advances in material science which enable the manufacturing of complex bianisotropic materials. By using Maxwell's equations and corresponding boundary conditions, the electromagnetic field distribution in bianisotropic solenoid coils is determined and the influence of the bianisotropic behaviour of coil to the impedance and Q-factor is considered. Bianisotropic media are the largest class of linear media which is able to describe the macroscopic material properties of artificial dielectrics, artificial magnetics, artificial chiral materials, left-handed materials, metamaterials, and other composite materials. Several special cases of coils, filled with complex substance, have been analyzed. Results obtained by using the analytical approach are compared with values calculated by numerical methods, especially by our new hybrid EEM/BEM method and FEM.

Keywords—Bianisotropic media, impedance and Q-factor, Maxwell's equations, hybrid EEM/BEM method.

I. INTRODUCTION

THE main idea of bianisotropics is a combination of two physical notions: (a) the near-field manipulation and (b) chirality. Bianisotropics concerns the subject of an intrinsic magnetoelectric (ME) coupling in media. Bianisotropic media are conceived as artificial structures and placed in an electric or magnetic field becomes both polarized and magnetized. Almost any media in motion becomes bianisotropic. The first cases of bianisotropic materials were indeed moving dielectrics and magnetic materials in the presence of electric or magnetic fields.

Historically, the electromagnetic chirality was studied in the optical region. Hence, the most common term for chiral media is optically active media. Usually, the effects of magnetoelectricity in natural crystals are considered without any relations with a symmetry structure of the EM field. The bianisotropic medium is the most general linear complex medium.

N. B. Raicevic is with the Theoretical Electrical Engineering Department, Faculty of Electronic Engineering, University of Nis, Aleksandra Medvedeva 14, 18000 Nis, P.O. Box 73, SERBIA (corresponding author: +381-18-529447; fax: +381-18-588399; e-mail: nebojsa.raicevic@elfak.ni.ac.rs).

T. S. Prokic is a student at the Faculty of Electronic Engineering, University of Nis, SERBIA (e-mail: ogerozz@elfak.ni.ac.rs).

V. Golubovic is Ph.D. student at the Faculty of Electronic Engineering, University of Nis, SERBIA (e-mail: vladangolubovic@gmail.com).

This paper is partially supported by the Ministry of Science, Republic of Serbia, through the scientific projects 2011-2014.

Bianisotropic media, analytically proposed by Tellegen [1] over sixty years ago, can be nonreciprocal, and is not as popular, possibly because it has not been found in nature. Both chiral and bi-isotropic media are isotropic, and they become polarized when placed in a magnetic field, and magnetized when placed in an electric field.

This effect was theoretically predicted by Landau and Lifshitz in 1957 and Dzyaloshinskii in 1960 [2], and experimentally confirmed for anti-ferromagnetic chromium oxide by Astrov in 1961 [3].

In a chiral material the electric field induces a magnetic polarization with which it has $\pi/2$ phase difference, and the magnetic field induces an electric polarization with similar phase difference. However in the magneto-electric effect, the induced magnetic polarization is in phase with the electric field and the induced electric polarization is in phase with the magnetic field [4].

A bianisotropic medium provides a coupling between electric and magnetic fields. The field vectors D and H depend on both E and B . The constitutive relations for a bianisotropic medium is given by [4] - [10]:

$$\begin{aligned} \mathbf{D} &= \epsilon \mathbf{E} + \xi \mathbf{H}; \\ \mathbf{B} &= \zeta \mathbf{E} + \mu \mathbf{H}, \end{aligned} \quad (1)$$

where:

- \mathbf{E} is electric field strength, (vector values are in bold.)
- \mathbf{D} is electric displacement,
- \mathbf{H} is magnetic field strength and
- \mathbf{B} is magnetic flux density,
- ϵ and μ are electric and magnetic permittivity, ξ , and ζ are the value which defines the bianisotropic properties.

The constitutive parameters ϵ , μ , ξ , and ζ are arbitrary random tensors, potentially fully populated, and homogeneous within each layer. The electrical permittivity, ϵ , and the magnetic permeability, μ , are second-order tensors, while the chirality parameters ξ and ζ are pseudo-tensors. For bi-isotropic media, the material parameters are scalars and pseudo-scalars.

Maxwell's equations are form-invariant; however, constitutive relations are only form-invariant when they are written in the bianisotropic form. Classical theories for homogenization of local bianisotropic composites, based on the Maxwell Garnett and the Bruggeman formalism, are relevant about some "bianisotropic effects in left-handed materials".

The Maxwell-Garnett approach [11] has been a very successful theory in describing the effective dielectric properties of composite dielectric media.

A theory of electromagnetic processes in media is called as macroscopic electrodynamics or electrodynamics of continuous media. Relations between \mathbf{E} , \mathbf{D} , \mathbf{H} and \mathbf{B} acquire a special meaning in a view of a strong interest in recent propositions and intensive studies of different artificial electromagnetic structures called as "metamaterials", "left-handed materials", "chiral materials", "bianisotropic materials", etc [12] - [13].

"Metamaterials" are new artificially created structures, able to show material properties unknown in nature. Dot near-fields are originated from "microscopic" electric and magnetic charges.

The term "Metamaterial" has been introduced into the electromagnetic lexicon in recent years to describe new artificial materials with electromagnetic properties that are not found in naturally occurring materials. Metamaterial media and surfaces (with unconventional electromagnetic properties) have attracted a great deal of attention and interest in recent years. Various ideas involving double-negative (DNG) media, single-negative (SNG) materials, electromagnetic band gap (EBG) structures, and artificial very thin magnetic conductors (AMC) have been explored by many researchers over the past few years. New EEM/BEM hybrid method [14]-[24] can be applied for metamaterial structures determination.

The time-harmonic constitutive relations of a general bianisotropic medium are [10]:

$$\begin{aligned} \mathbf{D} &= \varepsilon_0(\varepsilon \mathbf{E} + \eta_0 \zeta \mathbf{H}); \\ \mathbf{B} &= \frac{1}{c_0}(\zeta \mathbf{E} + \eta_0 \mu \mathbf{H}), \end{aligned} \quad (2)$$

where ε_0 and μ_0 are the permittivity and permeability of free space respectively, and c_0 is the speed of light in free space.

For chiral materials the constitutive relations are given by:

$$\begin{aligned} \mathbf{D} &= \varepsilon \mathbf{E} - \chi \frac{\partial \mathbf{H}}{\partial t}; \\ \mathbf{B} &= \chi \frac{\partial \mathbf{E}}{\partial t} + \mu \mathbf{H}, \end{aligned} \quad (3)$$

where χ is called the chiral parameter.

When the medium is lossless, ε , μ and χ are real.

Tellegen had imagined a new medium for which the constitutive relations were given by:

$$\begin{aligned} \mathbf{D} &= \varepsilon \mathbf{E} + \chi \mathbf{H}; \\ \mathbf{B} &= \chi \mathbf{E} + \mu \mathbf{H}, \end{aligned} \quad (4)$$

where $\frac{\chi^2}{\varepsilon \mu} \approx 1$.

A chiral medium is characterized by the property that it is not identical with its own mirror image. The microstructure of a chiral medium has a left-handed or right-handed nature. The asymmetric geometry of the coils creates an overall chiral response. The electric and magnetic field vectors rotate as a wave propagates through such a medium.

The general theory of plan wave propagation in the bianisotropic media, including corresponding wave equations and the potential functions [6], is very well developed.

In the present paper solenoid coils [17] with bianisotropic cores are considered.

II. THEORETICAL BACKGROUND

It is considered a long solenoid of circular cross section (radius a) wound with N' turns of wire per unit length, the wire carrying current, having magnitude I and angular frequency ω . The solenoid core is bianisotropic, having constitutive relations (4) and conductivity σ . Outside of the solenoid is free space.

Inside the solenoid coil, Maxwell's equations, governing distribution of electromagnetic fields, have the following form:

$$\text{rot } \mathbf{H} = \sigma \mathbf{E} + j\omega \mathbf{D}; \quad \text{rot } \mathbf{E} = -j\omega \mathbf{B}; \quad \text{div } \mathbf{D} = 0; \quad \text{div } \mathbf{B} = 0. \quad (5)$$

Inside the solenoid coil, Maxwell's equations, governing distribution of electromagnetic fields, have the following form:

$$\begin{aligned} \text{rot } \mathbf{H} &= \sigma \mathbf{E} + j\omega \mathbf{D}, \quad \text{rot } \mathbf{E} = -j\omega \mathbf{B}, \\ \text{div } \mathbf{D} &= 0, \quad \text{and } \text{div } \mathbf{B} = 0. \end{aligned} \quad (6)$$

By using constitutive relation (4), it is obtained:

$$\text{rot } \mathbf{B} = [\mu \sigma + j\omega(\varepsilon \mu - \chi^2)] \mathbf{E}, \quad \text{div } \mathbf{E} = 0, \quad \text{and } \text{div } \mathbf{H} = 0. \quad (7)$$

Outside the solenoid coil is:

$$\begin{aligned} \text{rot } \mathbf{H} &= j\omega \varepsilon_0 \mathbf{E}, \quad \text{rot } \mathbf{E} = -j\omega \mu_0 \mathbf{H}, \quad \text{div } \mathbf{E} = 0, \\ \text{div } \mathbf{H} &= 0, \quad \mathbf{D} = \varepsilon_0 \mathbf{E}, \quad \text{and } \mathbf{B} = \mu_0 \mathbf{H}. \end{aligned} \quad (8)$$

The obtained Maxwell's equation can be solved analytically in cylindrical coordinates, r , θ , z , where z -axis coincides with solenoid axis.

Because of the problem axial symmetry, the field components depend only on the radial distance, r . So, $\partial/\partial\theta=0$ and $\partial/\partial z=0$ and angular, E_θ , and axial, E_z , electric field component satisfies the following Bessel's differential equations:

$$\frac{d^2 E_\theta}{dw^2} + \frac{1}{w} \frac{dE_\theta}{dw} + E_\theta \left(1 - \frac{1}{w^2}\right) = 0 \quad (9)$$

and

$$\frac{d^2 E_z}{dw^2} + \frac{1}{w} \frac{dE_z}{dw} + E_z = 0 \tag{10}$$

where:

$$\begin{aligned} w &= kr, \quad r < a \\ w &= k_0 r, \quad r > a \end{aligned} \tag{11}$$

$$k^2 = \omega^2(\epsilon\mu - \chi^2) - j\omega\mu\sigma \tag{12}$$

and

$$k_0^2 = \omega^2 \epsilon_0 \mu_0 \tag{13}$$

The value k is complex, $k = k_1 + jk_2$, where

$$k_1 = \omega \sqrt{\epsilon\mu - \chi^2} \sqrt{\frac{\sqrt{1+p^2} + 1}{2}}, \tag{14}$$

$$k_2 = \omega \sqrt{\epsilon\mu - \chi^2} \sqrt{\frac{\sqrt{1+p^2} - 1}{2}}, \tag{15}$$

$$p = \frac{\mu\sigma}{\omega(\epsilon\mu - \chi^2)} \tag{16}$$

By using boundary conditions:

$$E_\theta(r = a-0) = E_\theta(r = a+0),$$

$$E_z(r = a-0) = E_z(r = a+0),$$

$$H_\theta(r = a-0) = H_\theta(r = a+0) \text{ and}$$

$$H_z(r = a-0) - H_z(r = a+0) = NI, \tag{17}$$

where:

$$E_\theta = \begin{cases} CJ_1(kr), & r \leq a \\ C \frac{J_1(ka)}{H_1^{(2)}(k_0 a)} H_1^{(2)}(k_0 r), & r > a \end{cases}, \tag{18}$$

$$E_z = \begin{cases} E_0 J_0(kr), & r \leq a \\ E_0 \frac{J_0(ka)}{H_0^{(2)}(k_0 a)} H_0^{(2)}(k_0 r), & r > a \end{cases}, \tag{19}$$

$$B_\theta = \begin{cases} -\frac{k}{j\omega} E_0 J_1(kr), & r < a \\ -\frac{k_0}{j\omega} E_0 \frac{J_0(ka)}{H_0^{(2)}(k_0 a)} H_1^{(2)}(k_0 r), & r > a \end{cases}, \tag{20}$$

$$B_z = \begin{cases} -\frac{k}{j\omega} CJ_0(kr), & r < a \\ -\frac{k_0}{j\omega} C \frac{J_1(ka)}{H_1^{(2)}(k_0 a)} H_0^{(2)}(k_0 r), & r > a \end{cases}, \tag{21}$$

$$H_\theta = \begin{cases} \frac{B_\theta - \chi E_\theta}{\mu}, & r \leq a \\ \frac{B_\theta}{\mu_0}, & r > a \end{cases}, \tag{22}$$

$$H_z = \begin{cases} H_0 J_0(kr), & r < a \\ -\frac{k_0}{j\omega\mu_0} C \frac{J_1(ka)}{H_1^{(2)}(k_0 a)} H_0^{(2)}(k_0 r), & r > a \end{cases} \tag{23}$$

$$D_\theta = \begin{cases} \epsilon E_\theta + \chi H_\theta, & r < a \\ \epsilon_0 E_\theta, & r > a \end{cases} \tag{24}$$

$$D_z = \begin{cases} \epsilon E_z + \chi H_z, & r < a \\ \epsilon_0 E_z, & r > a \end{cases}, \tag{25}$$

$$C = -\frac{j\omega\mu}{k} H_0 - \frac{j\omega\chi}{k} E_0 \tag{26}$$

and by respecting radiation condition for large radial distance, the following field distribution can be obtained:

$$E_\theta = \frac{\omega^2 \chi \mu_0 NI}{kk_0} \frac{J_1(ka)}{J_0^2(ka) \frac{H_1^{(2)}(k_0 a)}{H_0^{(2)}(k_0 a)} + J_1^2(ka) \frac{H_0^{(2)}(k_0 a)}{H_1^{(2)}(k_0 a)} - \frac{k_0}{k} \left(\frac{\mu}{\mu_0} + \frac{\mu_0}{\mu} \frac{k^2 + \omega^2 \chi^2}{k_0^2} \right) J_0(ka) J_1(ka)} \tag{27}$$

and

$$H_\theta = NI \frac{J_0(ka) \frac{H_1^{(2)}(k_0 a)}{H_0^{(2)}(k_0 a)} - \frac{\mu_0}{\mu} \frac{k^2 + \omega^2 \chi^2}{k_0^2} J_1(ka)}{J_0^2(ka) \frac{H_1^{(2)}(k_0 a)}{H_0^{(2)}(k_0 a)} + J_1^2(ka) \frac{H_0^{(2)}(k_0 a)}{H_1^{(2)}(k_0 a)} - \frac{k_0}{k} \left(\frac{\mu}{\mu_0} + \frac{\mu_0}{\mu} \frac{k^2 + \omega^2 \chi^2}{k_0^2} \right) J_0(ka) J_1(ka)} \tag{28}$$

III. CALCULATION OF SOLENOID COIL IMPEDANCE

By using Pointing's theorem the power per unite solenoid length, P' , can be evaluated as Pointing's vector flux through complex surface condensing cylindrical surfaces $r=a+0$ and $r=a-0$,

$$P' = Z'I^* = [\Gamma(r = a+0) - \Gamma(r = a-0)] 2a\pi, \tag{29}$$

where:

$$\Gamma = E_\theta H_z^* - E_z H_\theta^* \tag{30}$$

is radial Pointing's vector component and $Z' = R' + jX'$ is solenoid coil impedance per unit length.

$$E_0 = \frac{\omega^2 \chi \mu_0 N I}{k k_0} \frac{J_1(ka)}{J_0^2(ka) \frac{H_1^{(2)}(k_0 a)}{H_0^{(2)}(k_0 a)} + J_1^2(ka) \frac{H_0^{(2)}(k_0 a)}{H_1^{(2)}(k_0 a)} - \frac{k_0}{k} \left(\frac{\mu}{\mu_0} + \frac{\mu_0}{\mu} \frac{k^2 + \omega^2 \chi^2}{k_0^2} \right) J_0(ka) J_1(ka)}, \quad (31)$$

where:

$$Z'_0 = j\omega L'_0, \quad L'_0 = \mu N'^2 a^2 \pi \quad (32)$$

are static values for input impedance and coil inductance per unit length.

The coil inductance per unit length, for arbitrary frequency, can be determined as:

$$L' = \frac{X'}{\omega}, \quad (33)$$

and coil Q-factor is:

$$Q = \frac{X'}{R'} = \frac{\omega L'}{R'}. \quad (34)$$

The impedance ratio is obtained:

$$\frac{Z'}{Z'_0} = \frac{L'}{L'_0} \left(1 - j \frac{1}{Q} \right). \quad (35)$$

Similar procedure can be applied on arbitrary shaped perfect conducting electrodes, where electrodes are replaced by finite system of Equivalent Electrodes [25] - [26].

In contrast to Charge Simulation Method, where the fictitious sources are placed inside the electrodes volume, the EEs are located on the body surface. The radius of EEs is equal to equivalent radius of electrode part, which is substituted.

This consideration can be applied on magnetic materials [15]. Boundary between two magnetic materials can be replaced by equivalent currents (ECU), where ECU are located on the boundary surface of the magnetic layers, having different magnetic permeability. A system of linear equations can be formed again, and surface density of Ampere's microscopic currents, J_s , are now unknown.

IV. NUMERICAL RESULTS

Computer-aided analysis of field distribution for evaluating electromagnetic device or component performance has become the most effective way of design. Analytical methods have limited uses and experimental methods are expensive and time consuming. Finite difference method, finite element method and boundary element method are used for the numerical solution of the field equations. The boundary element method employs an integral equation formulation. Since the unknowns are placed only on the boundary the dimensionality of the problem is reduced by one.

Finally:

In order to investigate the influence of the core bianisotropic properties, first solenoid, having isotropic cores, will be considered.

These results are contained in general proposed formulas as special cases for $\chi = 0$.

It is clear that the electromagnetic field distribution is simpler in the case of the isotropic core, when only axial magnetic field and angular electric field exists. Low frequency magnetic field is practically homogeneous inside the solenoid and vanishes in the exterior region. In the interior region electric field increases (from zero to value on the solenoid axes) from axes to the windings. Outside the solenoid the electric field strength is negligible and decreases as $1/r$. The LF coil impedance has an inductive character. L'/L'_0 dependence on the ratio a/λ_0 (λ_0 is free space wavelength), for solenoid having air core, is presented in Fig.1.

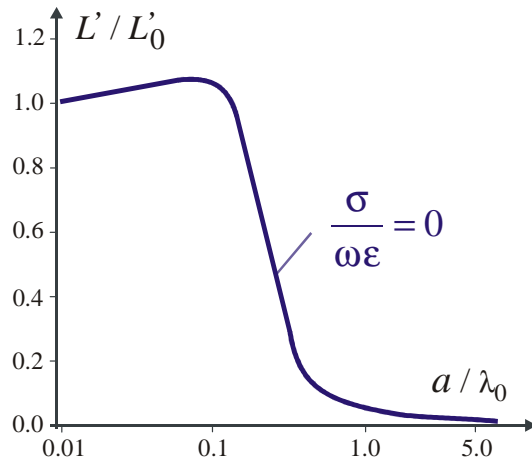


Fig. 1 L'/L'_0 for solenoid coil with air core for different ratio a/λ_0

It is noticeable that the maximal value, $L'_{\max} \approx 1.08808L'_0$, of inductance per unit length corresponds to the frequency as $a \approx 0.076\lambda_0$. With frequency increasing, because of very significant radiation effects, solenoid changes reactance properties, and shows inductive, capacitive and resonant qualities. Q-factor dependence on the ratio a/λ_0 , for solenoid having air core, is presented in the Fig.2.

The L'/L'_0 and Q-factor dependencies on the ratio a/λ_0 and for different ratios $\sigma/\omega\epsilon$, for solenoid with semiconducting isotropic core ($\epsilon_r = 1$, $\mu_r = 4$, $\chi = 0$) are presented in the Fig.3 and Fig.4.

Differently from above mentioned, in the solenoid with bianisotropic core exist both components of electric and magnetic field (axial and angular). Low frequency electric and magnetic field is practically homogeneous inside the solenoid

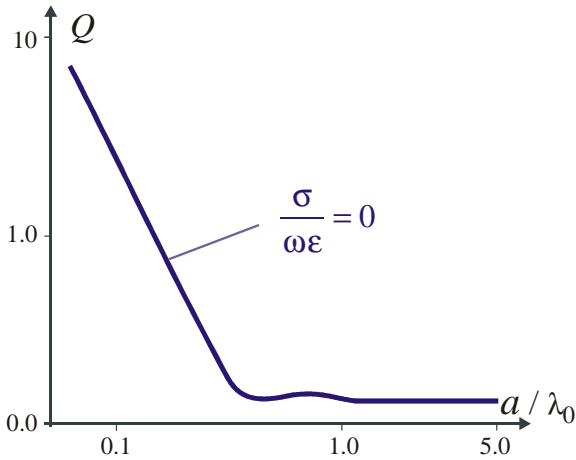


Fig. 2 Q-factor for solenoid coil with air core, for different ratio a/λ_0 .

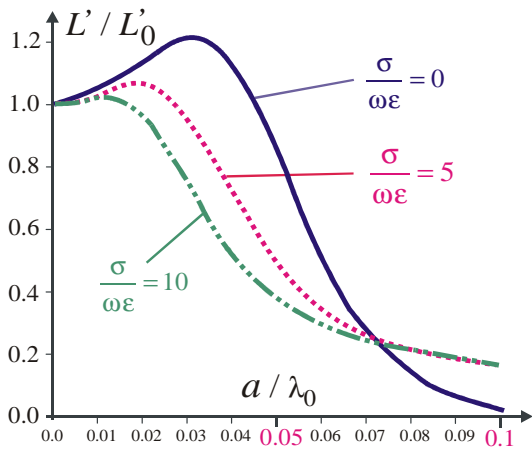


Fig. 3 The ratio L'/L'_0 as a function of a/λ_0 , for solenoid coil with $\epsilon_r = 1$, $\mu_r = 4$, $\chi = 0$, where $\sigma/\omega\epsilon$ is parameter

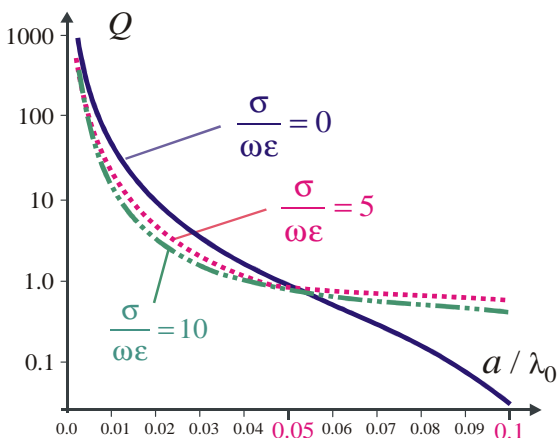


Fig. 4 Q-factor as a function of a/λ_0 , for solenoid coil with $\epsilon_r = 1$, $\mu_r = 4$, $\chi = 0$, where $\sigma/\omega\epsilon$ is parameter

and vanishes in the exterior region. In the interior region electric and magnetic field increases (from zero to value on the solenoid axes) from axes to the windings. Outside the solenoid the electric and magnetic field strength is negligible and decreases as $1/r$.

The L'/L'_0 and Q-factor dependencies on the ratio a/λ_0 and for different ratios $\chi/\sqrt{\epsilon\mu}$, for solenoid with bianisotropic core are presented in the Fig.5 and Fig.6 ($\epsilon_r = 1$, $\mu_r = 7$, $\sigma = 0$).

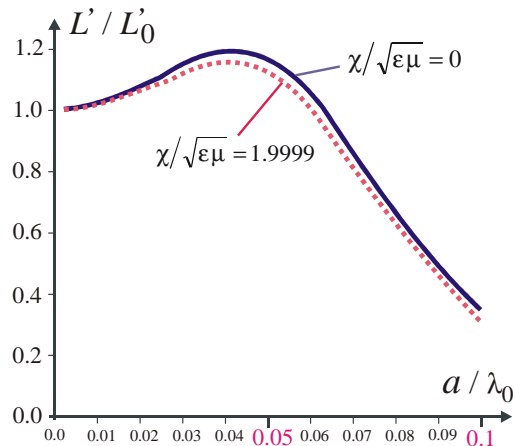


Fig. 5 The ratio L'/L'_0 as a function of a/λ_0 , for solenoid coil with $\epsilon_r = 1$, $\mu_r = 7$, $\sigma = 0$, where $\chi/\sqrt{\epsilon\mu}$ is parameter

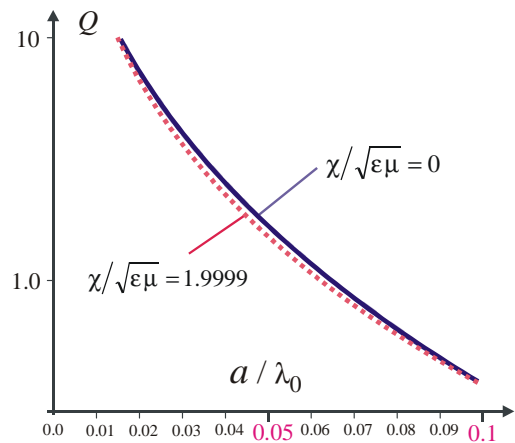


Fig. 6 Q-factor as a function of a/λ_0 , for solenoid coil with $\epsilon_r = 1$, $\mu_r = 7$, $\sigma = 0$, where $\chi/\sqrt{\epsilon\mu}$ is parameter

L'/L'_0 and Q-factor depend on a/λ_0 and for different $\chi/\sqrt{\epsilon\mu}$, for solenoid with semiconducting bianisotropic core ($\epsilon_r = 1$, $\mu_r = 7$, $\sigma/\omega\epsilon = 10$) are presented in Fig.7 and Fig.8. It can be concluded that the influence of the core bianisotropic properties increases together with core conductivity.

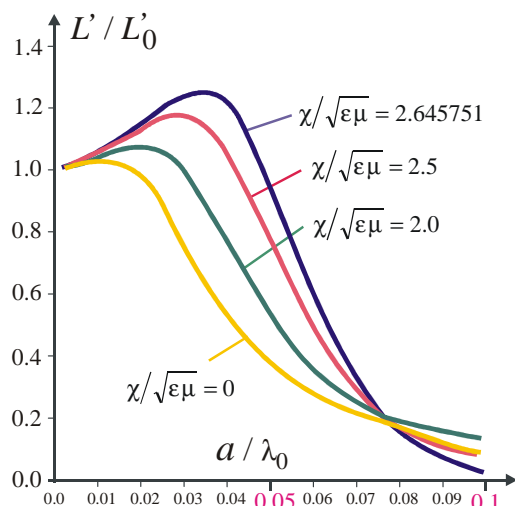


Fig. 7 The ratio L'/L'_0 as a function of a/λ_0 , for solenoid coil with $\epsilon_r = 1$, $\mu_r = 7$, $\sigma/\omega\epsilon = 10$, where $\chi/\sqrt{\epsilon\mu}$ is parameter.

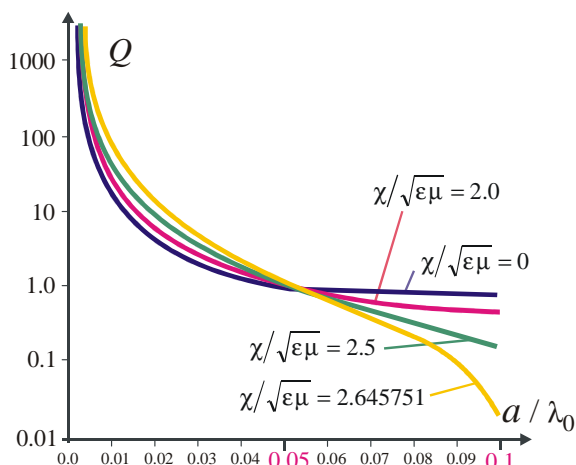


Fig. 8 Q-factor as a function of a/λ_0 , for solenoid coil with $\epsilon_r = 1$, $\mu_r = 7$, $\sigma/\omega\epsilon = 10$, where $\chi/\sqrt{\epsilon\mu}$ is parameter

REFERENCES

- [1] B. Tellegen, "The gyrator, a new electric network element", *Philips Res. Rep.* 3, pp. 81–101, 1948.
- [2] I. E. Dzyaloshinskii, "On the Magnetoelectric Effect in Antiferromagnetics", *Soviet Phys. JEPT*, Vol. 10, pp. 628-629, 1960.
- [3] D. N. Astrov, "The Magnetoelectric Effect in Antiferromagnetics", *Zh. Eksp. Teor. Fiz.*, Vol. 38, pp.984-985, 1961.
- [4] J. A. Kong, "Theorems of Bianisotropic Media", *Proceedings of the IEEE*, Vol. 60, No. 9, pp. 1036-1046, September 1972.
- [5] A. V. Amirkhizi and S. Nemat-Nasser, "Numerical Calculation of Electromagnetic Properties Including Chirality Parameters for Uniaxial Bianisotropic Media", *Smart materials and structures*, IOP Publishing Ltd, Vol. 17, pp. 1-9, January 2008.
- [6] I. V. Lindell and F. Olyslager, "Potentials in bi-anisotropic media," *J. Electromagn. Waves Applicat.*, vol. 15, no. 1, pp. 3–18, 2001.
- [7] A. Serdyukov, I. Semchenko, S. Tretyakov, A. Sihvola, "Electromagnetics of Bi-Anisotropic Materials", *OPA*, 2001.
- [8] A. Serdyukov, I. V. Semchenko, S. A. Tretyakov, and A. Sihvola, "Electromagnetics of Bi-Anisotropic Materials: Theory and Applications", New York: Gordon and Breach, 2001.
- [9] S. A. Tretyakov, Electromagnetics of complex media: chiral, bi-isotropic, and certain bianisotropic materials (a review), *J. Commun. Technol. Electron.*, vol. 39, no. 14, pp. 32–44, 1994.
- [10] I. Lindell, A. Sihvola, S. Tretyakov, A. Viitanen, *Electromagnetic Waves in Chiral and Bi-Isotropic Media*. Boston: Artech House, 1994.
- [11] A. Lakhtakia, Isotropic Maxwell–Garnett model for biisotropic-in-biisotropic mixtures, *Int. J. Infrared Millimeter Waves*, vol. 13, no. 4, pp. 551–558, 1992.
- [12] N. B. Raicevic, and S. S. Ilic, "One Hybrid Method Application on Complex Media Strip Lines Determination", in: *Proc. of 3rd International Congress on Advanced Electromagnetic Materials in Microwaves and Optics, METAMATERIALS 2009*, London, United Kingdom, August 30th - September 04th 2009, pp. 698-700.
- [13] N. B. Raicevic, and S. S. Ilic, "One Method for Chiral and Metamaterial Strip Lines Determination", in *Proc. of International Conference on European Electromagnetics, EUROEM 2008*, Lausanne, Switzerland, July 21-25 2008, pp.44-44.
- [14] N. B. Raicevic, and S. R. Aleksic, "One method for electric field determination in the vicinity of infinitely thin electrode shells", *Engineering Analysis with Boundary Elements*, ELSEVIER, vol. 34, no. 2, pp. 97-104, February 2010.
- [15] N. B. Raicevic, S. R. Aleksic, and S. S. Ilic, "A Hybrid Boundary Element Method for Multilayer Electrostatic and Magnetostatic Problems", *Electromagnetics*, TAYLOR & FRANCIS, vol. 30, no. 6, pp. 507-524, August 2010.
- [16] N. B. Raicevic, S. R. Aleksic, and S. S. Ilic, "One Numerical Method to Determine Improved Cable Terminations", *Electric Power Systems Research*, ELSEVIER, vol. 81, no. 4, pp. 942-948, April 2011.
- [17] N. B. Raicevic, and S. S. Ilic, "One Method Which Determines the Influence of the Solenoid Coil System Onto the Permanent Magnet", *Proc. of the EMC Barcelona '06*, pp. 678-683, PThA-12 (on CD), Barcelona (Spain), 04-08 September, 2006.
- [18] S. Ilić, S. Aleksić and N. Raičević, "TEM Analysis of Vertical Broadside Symmetrically Coupled Strip Lines with Anisotropic Substrate", *International Journal of Applied Electromagnetics and Mechanics*, IOS PRESS, vol. 37, no. 2-3, pp. 207-214, October 2011.
- [19] N. B. Raicevic and S. R. Aleksic, "One Method For Magnetic Multilayer Systems Determination", in: *Computer Field Models of Electromagnetic Devices* (Edited by Sławomir Wiak, Ewa Napieralska-Juszczak), *Studies in Applied Electromagnetics and Mechanics*, IOS PRESS, Amsterdam, The Netherlands, vol.34, chapter 4: Computational Techniques, pp. 220-227, November 2010.
- [20] N. Raicevic, S. Aleksic, S. Ilic, "New EEM/BEM Hybrid Method for Electric Field Calculation in Cable Joints", *International Journal of World Academy of Science, Engineering and Technology*, WASET, Paris, issue 55, no. 79, paper 117, pp. 599-604, July 2011.
- [21] S. Ilić, S. Aleksić, N. Raičević, "TEM analysis of vertical broadside symmetrically coupled strip lines with anisotropic substrate", *Proceedings of the 11-th Workshop on Optimization and Inverse Problems in Electromagnetism, OIPE 2010*, pp. 21-22, Sofia, Bulgaria, 14-18 September, 2010.
- [22] S. S. Ilić, N. B. Raičević, "TEM Analysis of Coupled Strip Lines with Anisotropic Substrate", *Proc. of the 9 International Conference on Telecommunications in Modern Satellite, Cable and Broadcasting Services, TELSIKS 2009*, pp. 347-350, Nis, Serbia, 7-9 October, 2009.
- [23] N. B. Raičević, S. S. Ilić: "Equivalent Electrode Method Application on Anisotropic Micro Strip Lines Calculations", *Proceedings Papers of International Conference on Electromagnetics in Advanced Applications, ICEAA 07*, paper 122 (CD), pp.998-1001, Torino, Italy, September 17-21, 2007.
- [24] N. B. Raičević, S. S. Ilić: "One Hybrid Method Application on Anisotropic Strip Lines Determination", *Proceedings of the 23rd Annual Review of Progress in Applied Computational Electromagnetics – ACES 2007* (on CD), pp. 8-13, Verona, Italy, March 19-23, 2007.
- [25] D. M. Velickovic, "Equivalent electrodes method", *Scientific Review - Belgrade*, no. 21-22, pp. 207-248, 1996.
- [26] D. M. Velickovic, Z. Mancic, "Low Frequency Electromagnetic Field Analysis in Bianisotropic Media", *Proceedings of International Magnetic Conference, INTERMAG 93*, pp. (EQ)11-14, Stockholm, Sweden, April 13-16, 1993.