



output resistance was increases about  $g_m R_{out}$  times, so the structure of cascode op-amp can provide high gain.

As we discussed in the beginning, design a op-amp with high-gain is just one part of the requirement, we must make sure that the bandwidth and the phase of the amplifier was not harmed by the gain-boost architecture. In order to reduce the harm the gain-boost architecture take to the circuit, first of all, we measure the total capacitance at the gate of the M7, M8, M13 and M14 which equal to  $C_{gs}$  add to  $C_{ds}$ , these capacitors are the load capacitance of the gain-boost amplifier. Secondary, designing the gain-boost amplifier that GBW equal to the GBW of the main amplifier. Thirdly, in order to push the second pole of the gain-boost amplifier to a frequency greater than 5 times of the main-amplifier's GBW, the phase margin of the gain-boost amplifier should be more than  $80^\circ$  [5].

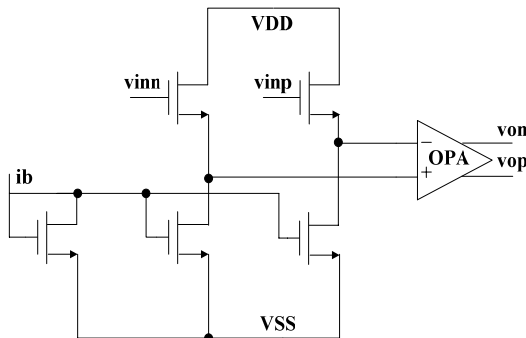


Fig. 2 The whole structure of the folded cascode OTA

The structure of the folded cascode OTA is indicated In Fig. 2. By using the cascode stage and common-drain stage, the driving ability is better than before and the bandwidth has been broadened while the dominant will not be influenced. But the common-mode level of the input has a necessary to be greater than 1.5v as a tradeoff to achieve the benefit above.

In Fig. 3, the PMOS gain-boost amplifier and its CMFB circuit using in this paper is presented. Using differential amplifier and this kind of CMFB circuit have many advantages. First of all, it is easy to achieve the requirements for the gain-boost amplifier. By using fold-cascode structure, this difference-ended amplifier can easily achieve a gain of 40dB with small channel length. Secondary, compare with using single-ended amplifier, the size of the differential amplifier is small than former. Thirdly, the output range of the gain-boost amplifier is smaller than the main amplifier, so using the differential input continuous time CMFB circuit can have both shorter settle time and smaller jitter in output common-mode voltage comparing with CMFB circuit. At the same time, using differential input continuous time CMFB circuit need smaller die size and power consumption than CMFB circuit using resistor for sampling.

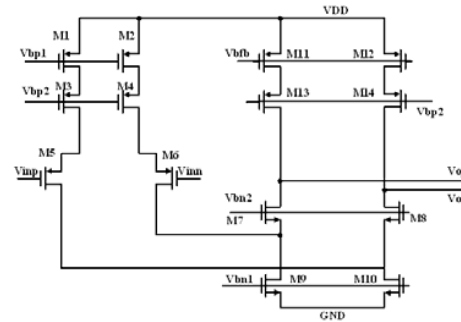


Fig. 3 The PMOS gain-boost amplifier

Beside those two parts, another part of circuit which must be seriously considered during circuit design is the SC CMFB circuit using both in main amplifier and the gain-boost amplifier. The folded cascode amplifier needed a extremely precise bias voltage to make sure that the output common-mode are stabilized at a suitable value, thus, it is necessary to introduce a common mode feedback circuit in order to make the output common-mode of the entire circuit meet the requirement. Common-mode feedback circuit is divided into continuous-time common-mode feedback and switched-capacitor common-mode feedback. Since the switched-capacitor common-mode feedback has no static power consumption, and has a smaller influence on amplifier, therefore in this design, a switched-capacitor common-mode feedback circuit is introduced for CMFB circuit [6]. Fig. 4 shows the schematic of a CMFB circuit. out + and out- are the differential output voltage signal, clock1 and clock2 are two non-overlap clock signal, Vcm is the reference voltage for the output common-mode voltage. Vb provide by bias circuit and Vbfb are output of the CMFB circuit which is using to stabilize the output common-mode voltage.

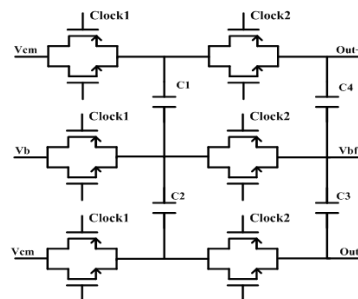


Fig. 4 common-mode feedback with switched-capacitor

### III. LAYOUT DESIGN

The whole circuit includes a main amplifier, two gain boost amplifiers, three common-mode feedback, bias circuit of the main amplifier and two gain-boost amplifiers. The layout problem while designing the layout is to maintain the performance which will harm by the non-ideal characters. To achieve this goal, two gain boost amplifiers are located near its input and output point in the main amplifier in order to make wine between them are short. The two gain-boost amplifiers are put aside on the main amplifier respectively, so that the whole layout is symmetric. The switched-capacitor common-mode feedback is placed at the left of the main amplifier so that to

make the connection wire between Out+, Out-, vb1 of the CMFB circuit and the main amplifier shortest. Main amplifier use the matching form of ABBA, the use of dual power supply guarantee the differential-mode signals have a better match, and the bias circuit of the main amplifier is put on the bottom of the main amplifier CMFB, so that the shape of the layout is more order and the area is smaller. The whole layout is shown in Fig. 5.

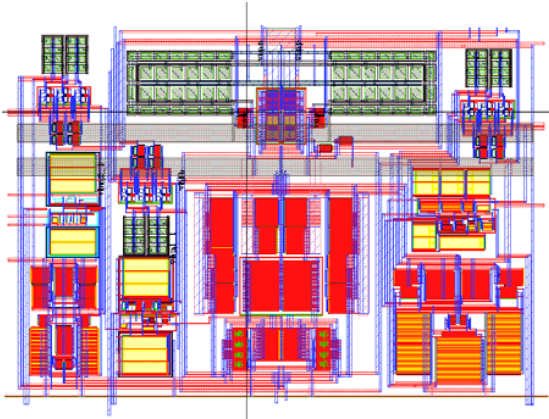


Fig. 5 The whole Layout

#### IV. CIRCUIT SIMULATION RESULTS

The whole amplifier was design under TSMC 0.18 CMOS mix-signal process, and simulate using Spectre under Cadence. Supply voltage is 1.8V, load capacitor is 2pF.

AC simulation result shows that DC-gain is 80 dB, unity gain bandwidth is 1.437GHz, Phase Margin is 62 °, AC simulation result was shown in Fig. 6.

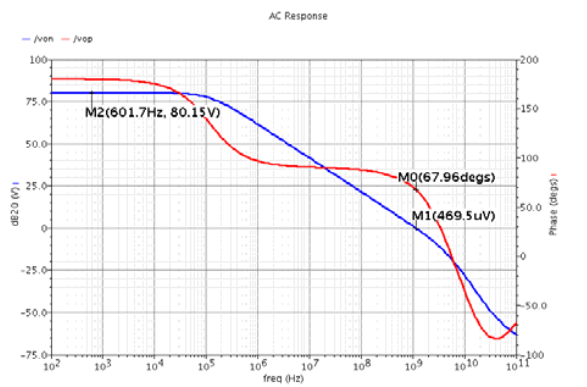


Fig. 6 AC response

#### V. CONCLUSION

In this paper, a folded cascode amplifier with gain boost structure is described. Instead of using single-ended amplifier, in this paper, a fully differential amplifier is used. Besides, a SC CMFB circuit is used to reduce the jitter of the common-mode voltage. The result of schematic simulation is setting out below: gain up to 80dB, unity gain bandwidth of about 1.437GHz for a 2pF load, a slew rate is about +428V/ $\mu$ s, output swing is 0.2~1.35V, with the power supply of 1.8V, the power consumption is 88mW. The main characteristics of the amplifier

are shown in Table 1. This amplifier was used in a 10bit 150MHz pipelined ADC with under-sampling technical.

TABLE I  
MAIN CHARACTERISTICS OF THE OP-AMP

Op-amp specification	Simulation
DC Gain	>80dB
Phase Margin	62.3°
Unity Gain Frequency	1.437GHz
Output Swing	0.2V~1.35V
Slew rate	428V/ $\mu$ s
Supply Voltage	1.8V
Power Consumption	88mW
Load Cap	2pF

#### ACKNOWLEDGMENT

First I want to show my appreciation to the experts in this major. Their production provides me precious experience and theories. Next thanks to my mentor and my university of Beijing Institute of Technology. At last, thanks for the help and the discussion from my colleagues.

#### REFERENCES

- [1] D. J. Huber, R. J. Chandler, "A 10b 160 MS/s 84mW 1V sub-ranging ADC in 90nm CMOS," ISSCC Dig Tech Papers, pp. 455, 2007.
- [2] Thomas Lee, "Optimal design of a CMOS op-amp via geometric programming," IEEE Trans. Computer Design of Integrated Circuits and Systems, vol. 20, no. 1, pp. 191-199, 2001.
- [3] O. Choksi, R. L. Carley, "Analysis of switched-capacitor common-mode feedback circuit," IEEE Trans. Circuits Syst II, vol. 50, no. 12, pp. 906, 2003.
- [4] Sackinger, W. Guggenbuhl, "A high - impedance MOS cascode circuit," IEEE Journal of Solid - State Circuit, vol 25, no.1, pp.289-298, February 1990.
- [5] R. Hogervorst, "Design of low-voltage low-power CMOS operational amplifier cells," Delft, The Netherlands: Delft University Press, 1996.
- [6] PR. Gray, PJ Hurst, "Analysis and Design of Analog Integrated Circuit," Inc. 4th edition, 160-183, 2004.