

A Contribution to 3D Modeling of Manufacturing Tolerance Optimization

F. Sebaa, A. Cheikh, M. Rahou

Abstract—The study of the generated defects on manufactured parts shows the difficulty to maintain parts in their positions during the machining process and to estimate them during the pre-process plan. This work presents a contribution to the development of 3D models for the optimization of the manufacturing tolerances. An experimental study allows the measurement of the defects of part positioning for the determination of \mathcal{E} and the choice of an optimal setup of the part. An approach of 3D tolerance based on the small displacements method permits the determination of the manufacturing errors upstream. A developed tool, allows an automatic generation of the tolerance intervals along the three axes.

Keywords—Manufacturing tolerances, 3D modeling, optimization, errors.

I. INTRODUCTION

IN a chain of dimensional ratings, more angular and radial defects of the same coin can be influential on a requirement, making it impossible to employ a statistical method based on simply the sum of the variances associated with each tolerance. This difficulty has necessitated the development of a particular method to separate the possible influence of defects in each part. The method of lines analysis establishes, for each requirement, an inequality that links the nominal dimensions and tolerances of parts specifications, the limit value of the requirement. Y.S. Hong [1] proposed a very broad review of the tolerancing method in 2002. Bourdet [2.3] has developed a computational model of tolerance unidirectional based on machining dispersions. Anselmetti [4] extended this approach for faces lying in any direction. Such approaches are not able to handle small angular deviations from one machining phase to the next. The purpose of three-dimensional approaches is to manage the small angular deviations occurring between the various machining phases. P. Bourdet, E. Ballot and F. Thiebaut [5.6] have developed the Δ Tol tolerancing method, which relies upon the concept of a small displacement taylor. This model considers that have defects affecting the raw and machined surfaces are in act negligible, which offers the possibility of replacing real surfaces containing defects by perfect substitution surfaces, in association with certain criteria to be defined (e.g., least squares, mini max, cylinder inscribed).

Fethi Sebaa is with Abou Bakr Belkaid University, Tlemcen, Algeria.
e-mail: sebaafethi@yahoo.fr

In choosing manufacturing specifications for each phase, G. Thimm [7] proposed rules for 3D tolerance transfers. Desrochers [8] offered a three-dimensional model of tolerance transfers based on a model called technologically and topologically-related surfaces. Villeneuve et al [9] presents a model of 3D tolerancing for manufacturing mechanical parts. The concept of small displacement taylor is used to model the manufacturing process. The main originality is to model the assembly machine as a mechanism. Badreddine et al [10] proposes an approach to manufacturing tolerancing in three dimensions using a strategy to rigorously examine the definition of a reference system imposed by the ISO. This method is based on the t small displacements taylor, which describes the possible deviations between the machined surfaces and surfaces of the nominal part model. In this study, a 3D tolerancing is developed based on default of part position.

II. EXPERIMENTAL STUDY

The purpose of this step is determining the optimal position isostatic. To achieve this objective, a series of 100 tests for measuring defects in positioning load by varying the distance between the normals on a gauge block of dimensions 100 x 35 x 9 mm was done (figure 1).

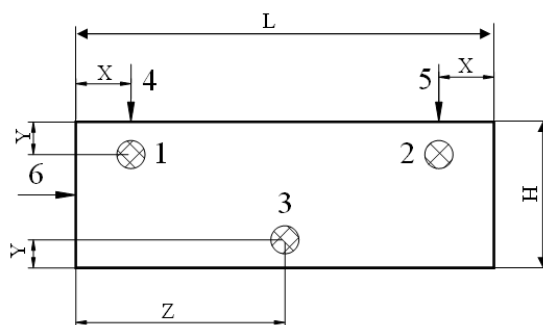


Fig. 1 Support variation

Fig. 2 shows an example of a statement of metrological errors into normal position due to the support plan. Figure 3 represents the evolution of deviations from the support 1 according to the number of trials. Note that the chosen positions vary between 0.002 and 0.014. The optimal position is given by the smallest deviation from the support 1 at position 9.



Fig. 2 Example of measurement

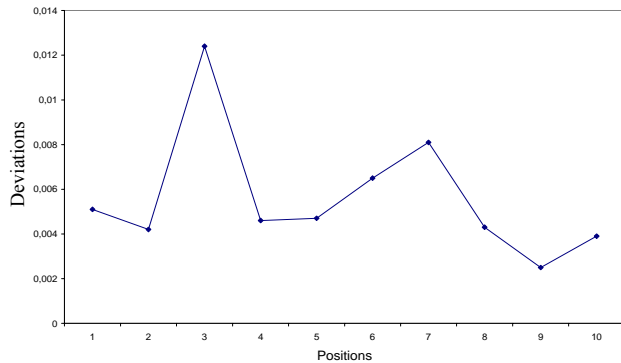


Fig. 3 Standard deviations of the support 1 according to the number of tests

Figure 4 shows the evolution of deviations from the support 2 by the number of trials. Note that the chosen positions vary between 0.002 and 0.012. The optimal position is given by the smallest deviation from the support 2 is located at position 10.

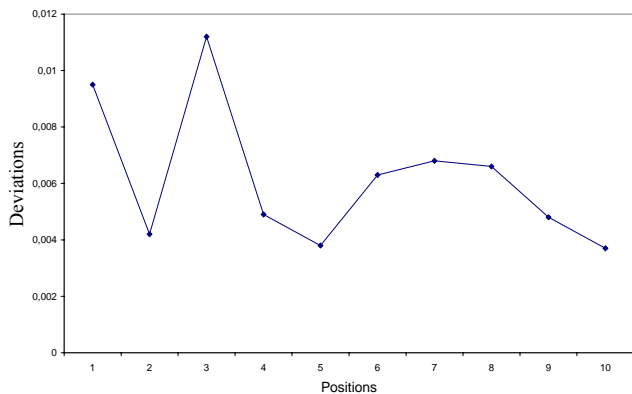


Fig. 4 standard deviations of the support 2 by the number of tests

Figure 5 shows the evolution of deviations from the support 3 depending on the number of trials. Note that the chosen positions vary between 0.002 and 0.016. The optimal position of the support 2 is in position 6.

Figure 6 shows the evolution of deviations from the support 4 against the number of trials. Note that the chosen positions vary between 0.002 and 0.035. The optimal position is given by the smallest deviation from the support 4 is located at position 10.

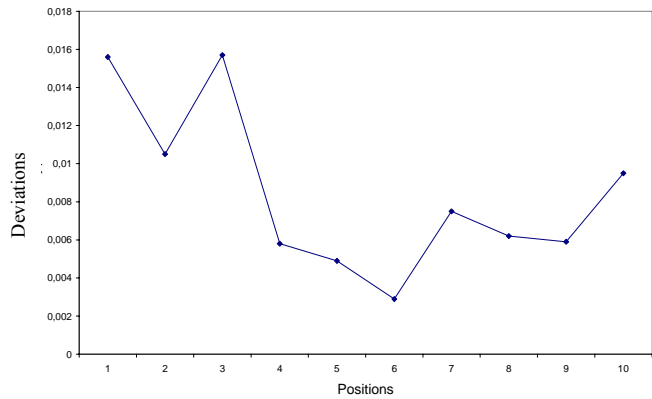


Fig. 5 Standard deviations of the support 3 according to the number of tests

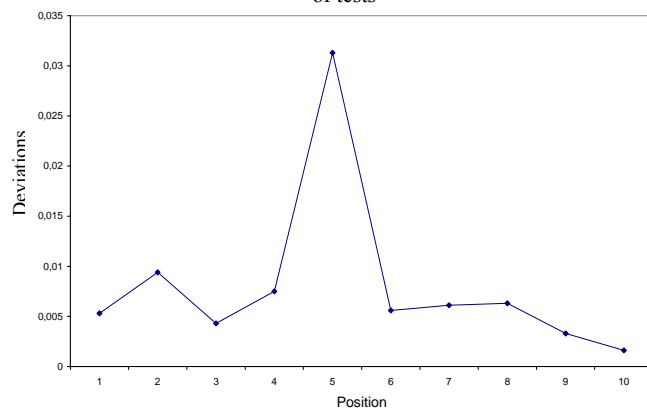


Fig. 6 Standard deviations of the support 4 against the number of tests

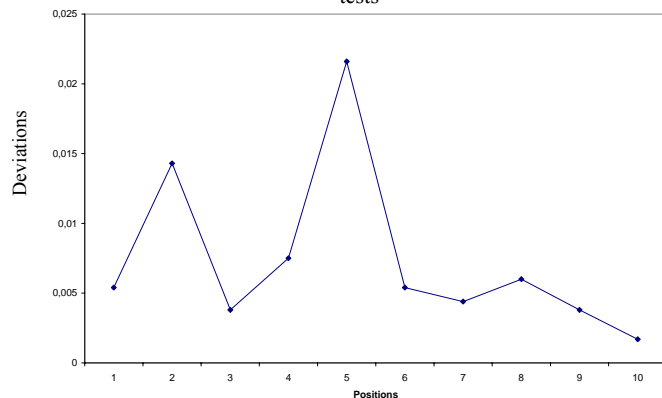


Fig. 7 Standard deviations of the support 5 against the number of tests

Figure 7 represents the evolution of deviations from the support 5 in terms of number of trials. Note that the chosen positions vary between 0.002 and 0.025. The optimal position is given by the smallest deviation from the support 5 located in position 10.

Figure 8 represents the evolution of standard deviations of the support 6 in terms of number of trials. Note that the chosen positions vary between 0 and 0.025. The optimal position is given by the smallest deviation from the support 6 is found in positions 3, 8 and 10.

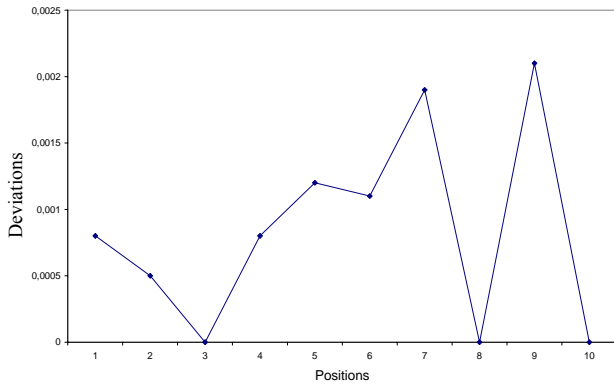


Fig. 8 Standard deviations of the support 6 in terms of number of trials

According to the graphs shown in Figures 3, 4, 5, 6, 7 and 8, we deduce the distribution of normal best way to find the slightest error. Figure 9 represents the optimal distribution of normal ($X = \frac{1}{6}L$, $Y = \frac{1}{6}H$ and $Z = \frac{1}{2}L$).

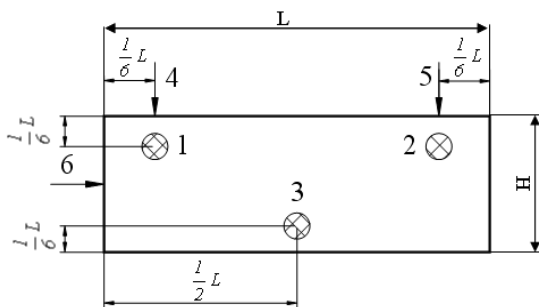


Fig. 9 Optimal Position

III. MODELING POSITIONING

Several researchers have focused their work on the contribution to the development of mathematical models on the positioning. Nnaji and Cabaday propose a model of decision-piece using a kinematic approach. Nnaji [11,12] likens the piece to a prism. It provides a rationale for modeling taking part in analyzing an equal number of faces of the prism modeling part. The inventory of the various forces exerted on the workpiece can check the balance of the play on his feet and conclude on the uniqueness of the position of the part in the repository of the machine tool. The passage of a piece of complex geometry modeling in the form of a prism is not addressed and does not seem easy. Cabaday [13] proposes a model to evaluate the forces exerted by the mounting part machining.

Liu [14] propose a strategy for placing the media. It

models the actions exerted by the cutting tool on the workpiece in order to calculate the deformations of walls machined. The number and placement of materials are determined to minimize distortion. Donoghue and Cutkosky model the contact between the part and assembly machining. Cutkosky [15] studied the friction between the part and assembly machining. It calculates the friction surface limits that ensure the balance of the play when subjected to cutting forces. Donoghue [16] models the pressure and deformations in contact-part assembly machine. In our study, we focus on modeling of deviations from the room without clamping, using the torques of small displacements and the tightening effect on the positioning, using the torsor reaction support.

IV. SMALL DISPLACEMENT TORSOR

The concept of small displacement torsor (TPD) has been developed in the 70s by Pierre Bourdet and Andrew Clement. It allows to define any point M of a rigid body moving a small [17,18,19].

The displacement of a solid can be characterized by a point O by a translation vector and rotation matrix, equation (1).

$$\overline{D}_M = \overline{t}_O + \overline{M}\overline{O} \wedge \overline{\omega} \quad (1)$$

With

$\overline{t}_O(u, v, w)$ translation vector at point O around the axes x, y, z, and $\overline{\omega}(\alpha, \beta, \gamma)$ vector rotation around the axes x, y, z.

The translation vector and rotation are given according to ε , equations 7,8,9,10 and 11.

The pair of vectors $\overline{t}_O(\overline{\omega})$ is called a small displacement torsor. In this work, this small displacement torsor in characteristic deviations of the workpiece on the support.

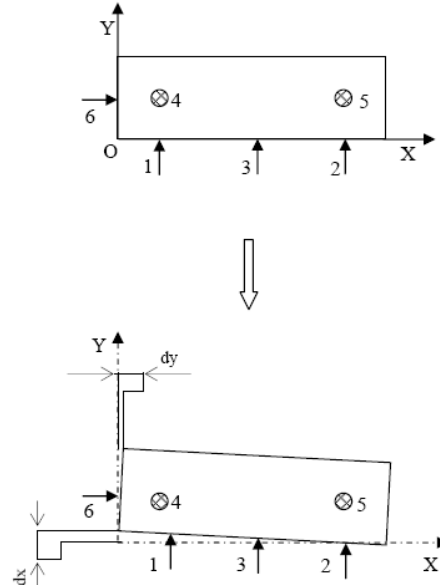


Fig. 10 Part deviations

$$\varepsilon_2 = \begin{bmatrix} u & \alpha & x_2 \\ v & \beta & y_2 \\ w & \delta & z_2 \end{bmatrix} \begin{bmatrix} 0 \\ 1 \\ 0 \end{bmatrix}$$

$$\varepsilon_2 = v - (\alpha.z_2 - \delta.x_2)$$

$$\varepsilon_3 = \begin{bmatrix} u & \alpha & x_3 \\ v & \beta & y_3 \\ w & \delta & z_3 \end{bmatrix} \begin{bmatrix} 0 \\ 1 \\ 0 \end{bmatrix}$$

$$\varepsilon_3 = v - (\alpha.z_3 - \delta.x_3)$$

$$\varepsilon_4 = \begin{bmatrix} u & \alpha & x_4 \\ v & \beta & y_4 \\ w & \delta & z_4 \end{bmatrix} \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}$$

$$\varepsilon_4 = w + (\alpha.y_4 - \beta.x_4)$$

$$\varepsilon_5 = \begin{bmatrix} u & \alpha & x_5 \\ v & \beta & y_5 \\ w & \delta & z_5 \end{bmatrix} \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}$$

$$\varepsilon_5 = w + (\alpha.y_5 - \beta.x_5)$$

$$\varepsilon_6 = \begin{bmatrix} u & \alpha & x_6 \\ v & \beta & y_6 \\ w & \delta & z_6 \end{bmatrix} \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix}$$

$$\varepsilon_6 = u + (\beta.z_6 - \delta.y_6)$$

$$\alpha = \frac{(\varepsilon_1 - \varepsilon_2) + \frac{[(\varepsilon_3 - \varepsilon_2).(1 - Z_1) - (\varepsilon_1 - \varepsilon_3).(1 - Z_3)]}{(1 - Z_2)}}{(1 - Z_1)} \quad (7)$$

$$\delta = \frac{[(\varepsilon_3 - \varepsilon_2).(1 - Z_1) - (\varepsilon_1 - \varepsilon_3).(1 - Z_3)]}{(X_1 - X_2).(1 - Z_2)} \quad (8)$$

$$\beta = \frac{\left[\frac{(\varepsilon_4 - \varepsilon_5) + \left(\frac{(\varepsilon_1 - \varepsilon_2) + \frac{[(\varepsilon_3 - \varepsilon_2).(1 - Z_1) - (\varepsilon_1 - \varepsilon_3).(1 - Z_3)]}{(1 - Z_2)}}{(1 - Z_1)}}{(Y_4 - Y_5)} \right)}{(X_4 - X_5)} \right]}{(9)}$$

(2)

(3)

(4)

(5)

(6)

$$U = \varepsilon_6 - \left[\frac{\left(\frac{(\varepsilon_4 - \varepsilon_5) + \left(\frac{(\varepsilon_1 - \varepsilon_2) + \frac{[(\varepsilon_3 - \varepsilon_2).(1 - Z_1) - (\varepsilon_1 - \varepsilon_3).(1 - Z_3)]}{(1 - Z_2)}}{(1 - Z_1)}}{(Y_4 - Y_5)} \right)}{(X_4 - X_5)} \right)}{Y_5} \right] \quad (10)$$

$$V = \varepsilon_3 - \left[\frac{(\varepsilon_1 - \varepsilon_2) + \frac{[(\varepsilon_3 - \varepsilon_2).(1 - Z_1) - (\varepsilon_1 - \varepsilon_3).(1 - Z_3)]}{(1 - Z_2)}}{(1 - Z_1)} \right] Z_3$$

$$+ \left[\frac{[(\varepsilon_3 - \varepsilon_2).(1 - Z_1) - (\varepsilon_1 - \varepsilon_3).(1 - Z_3)]}{(X_1 - X_2).(1 - Z_2)} \right] X_3 \quad (11)$$

V. DEVELOPING A MODULE FOR CALCULATING ERRORS IN 3D

Module has been developed in VB6, figure13, based on formulas 7,8,9,10 and 11 to calculate the errors of the fixture workpiece.

A concrete example, figure11 and 12, was treated to calculate the errors in three direction X, Y, and Z

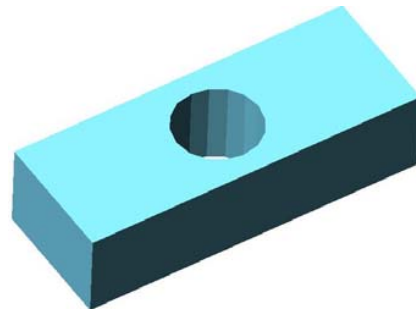


Fig. 11 3D Drawing

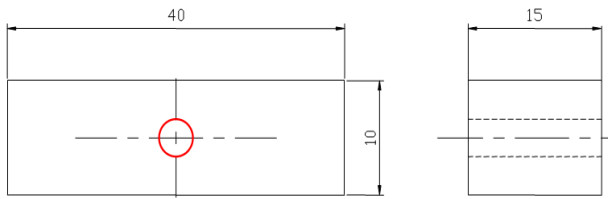


Fig. 12 Drawing definition

Fig. 13 Module developed

VI. CONCLUSION

The tolerancing of mechanical systems is a key stage of the creation of a product. The effects induced by the influence tolerancing quality and cost of the finished product. Mastering dimensional and geometrical defects in manufacture of mechanical parts can ensuring final product quality during the realization of a piece, it is necessary implement several procedures and processes manufacturing. Dispersions are manufacturing due process and the manufacturing process; that is to say, the choice of machine, type of machining, door parts and the best positioning, and tools that will help realize the room. A condition of no waste remains always control for positioning defects or random dispersions.

This study showed that the optimum position is to keep a distance equal to $1/6$ between the support (ground plane orientation) in the lengthwise and $1/6$ in the width direction, the stop being in the middle of the part.

This work has allowed us to identify errors (geometric imperfections) in three dimensions. To calculate these errors, it is sufficient to introduce the dimension of the workpiece in the developed module.

REFERENCES

- [1] Hong YS, Chang TC (2002) A comprehensive approach of tolerancing research. *Int J Prod Res* 40(11):2425–2459.
- [2] Bourdet P (1973) Chaînes de cotes de fabrication : première partie Modèles, L'ingénieur et le Technicien de l'Enseignement Technique, Décembre.
- [3] Anselmetti B, Bourdet P (1993) Optimisation of a workpiece considering production requirements. *Computers in Industry - N° 21*, - pp. 23–34 ELSEVIER - January 1993.
- [4] Anselmetti B (2003) Cotation de fabrication et métrologie, Edition Hermes Lavoisier.
- [5] Bourdet P, Ballot E (1995) Geometrical behaviour laws for computer aided tolerancing. In *Computer Aided Tolerancing*.
- [6] Proceedings of 4th C.I.R.P. Seminars on Computer Aided Tolerancing, Tokyo, 5–6 April 1995, pp 143–154.
- [7] Thiebaut F (2001) Contribution à la définition d'un moyen unifié de gestion de la géométrie réaliste basé sur le calcul des lois de comportement des mécanismes, Thèse de doctorat, ENS de Cachan LURPA.
- [8] Thimm G, Lin J (2005) Redimensioning parts for manufacturability: a design rewriting system. *Int J Adv Manuf Technol* 26:399–404.
- [9] Desrochers A (2003) A CAD/CAM representation model applied to tolerance transfer methods. *J Mech Des* 125(1):14–22, March.
- [10] Villeneuve F., Legoff O., Geiskopf F. (2000). Quantification tridimensionnelle des défauts de fabrication pour l'analyse et la synthèse de tolérances, *jnt International Conference IDMMME*, Montréal, Canada.
- [11] Badreddine Ayadi, Bernard Anselmetti, Zoubeir Bouaziz, Ali Zghal, (2007) *Three-dimensional modelling of manufacturing tolerancing using the ascendant approach*, *International Journal Advanced Manufacturing Technology*, 2007.
- [12] B.O. Nnaji, S. Alladin, P. Lyu, «A framework for a rule based expert fixturing system for face milling planar surfaces on a cad system using flexible fixtures», *Journal of Manufacturing Systems*, Vol.7, N.3, 1988.
- [13] B.O. Nnaji, P. Lyu, «Rules for an expert fixturing system on a cad screen using flexible fixtures», *Journal of Intelligent Manufacturing*, Vol.1, p31-48, 1990.
- [14] J. Cabadaj, «Theory of computer aided fixture design », *Computers in Industry*, vol.15, pp141-147, 1990.
- [15] J.X. Liu, D. Strong, (1993) «A rule-based approach selecting supporting schemes in automatic fixture design, GSI'4, 4th International Congress of Industrial Engineering, Marseille, décembre 1993.
- [16] M.R. Cutkosky (1994), Fixture planning with friction , *Journal of Engineering for Industry*, vol.113, pp320-327, august 1991.
- [17] J.P. Donoghue, W.S. Howard, V. Kumar , (1994), Stable workpiece fixturing», *Advances in Design Automation*, vol.2, pp475-482, 1994.
- [18] P. Bourdet, (1975), Optimisation des méthodes de cotation et de tolérancement en fabrication mécanique. *Journée du GAMI*, Paris, 30 mai 1975.
- [19] P. Bourdet and A. Clément, (1976) «Controlling a complex surface with a 3 axis Measuring Machine», *Annals of the CIRP*, Vol. 25, p 359-364, 1976.
- [20] P. Bourdet and A. Clément, (1988) «A study of optimal criteria identification based on the small displacement screw model», *Annals of the CIRP*, Vol. 37, p 503-506, 1988.