

Bio Fuel Production from Waste of Starting Dates in South Algeria

Insaf Mehani, Ahmed Boulal, Bachir Boucekima

Abstract—Renewable energy, including bio energy are an alternative to fossil fuel depletion and a way to fight against the harmful effects of climate change. It is possible to develop common dates of low commercial value, and put on the local and international market a new generation of products with high added values such as bio ethanol. Besides its use in chemical synthesis, bio ethanol can be blended with gasoline to produce a clean fuel while improving the octane.

Keywords—Bio energy, dates, bio ethanol.

I. INTRODUCTION

THE necessary reduction and progressive consumption of fossil fuels, whose scarcity is inevitable, involves mobilizing a set of alternatives. Renewable energy, including bio energy is an alternative to the depletion of fossil fuels and a way to fight against the harmful effects of pollution that undergoes the environment.

The valuation biomass by biotechnological processes is the solution of choice since it contributes to the production of bio energy and high-value substances. Among the latter may be drawn from this development, we can quote ethyl alcohol, Strategic Energy substance. However, the development of bio fuel production from wheat or corn or other raw materials for human food or animal involved in some way by specialists famine in some countries. On the other hand, bio ethanol can be produced from several other substrates rich in fermentable sugars, namely cellulosic biomass, energy crops and organic waste. Indeed, agricultural and agro-industrial produce large quantities of waste that are a nuisance to some environment. Numerous studies have shown that these wastes rich in organic matter were noble products and new materials for many industries. It should be noted that waste dates can be a recoverable raw material to be a source of energy and industrial interest molecules. Waste dates crystallize up to 65% of fermentable sugars and therefore represent a preferred substrate for the production of many substances.

Among other ethyl alcohol, the latter from a biotechnological process of anaerobic fermentation is an undeniable economic importance because it is used in various and vital sectors [1].

Insaf Mehani is with the LENREZA Laboratory Kasdi Merbah University Ouargla BP 511 30000 Algeria (phone: 213-777-381-664, e-mail: mehaniin@gmail.com).

Bachir Boucekima is with the LENREZA Laboratory University of Kasdi Merbah BP 511 30000 Ouargla Algeria.

Ahmed Boulal is with the Research unit in Renewable energy in Middle Sahara (URER.MS) 01000 Adrar Algeria.

According to statistics of the Ministry of Agriculture, Algerian national production reached 387,313 tons in 1998 which 30-50% is waste and dates of low value, or about 120,000 tons could be recovered and put on domestic market a new generation of highly prized and often imported [2].

II. DESCRIPTION OF MANUFACTURE METHOD

The production of ethanol from waste dates comprises the following steps:

- Washing dates,
- Absorption in hot water (85°C extraction),
- Pitting which separates the rings of the pulp which is ground and transformed into must that is sent in turn fermentation.
- Addition of dilution water, acid and yeast,
- Distillation.

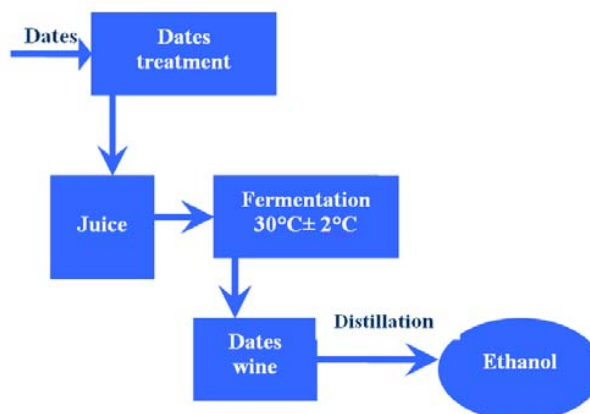


Fig. 1 Diagram of the various stages of manufacture ethanol

III. MATERIALS AND METHODS

A. Vegetable Material

The substrate used for the production of alcohol is formed of the waste of dates on certain varieties of common dates.

B. Biological Material

The yeast *Saccharomyces cerevisiae* is used for the production of alcohol.

C. Methodology of Work

1. Preparation of Must Dates

After washing, the imbibitions of dates are carried out using hot water (90 to 95°C) to facilitate coring. Water imbibitions with high sugar will be used as dilution water. Dates were then diluted with 200g of pulp per 800ml of water. The pH of the wort is adjusted to between 4.3 and 4.7 with sulfuric acid (H_2SO_4 , 1N). This acidic pH detrimental to bacterial growth is conducive to yeast overgrowth [3].

2. Alcoholic Fermentation

After inoculating the medium with baker's yeast *Saccharomyces cerevisiae* (1g/l) [4], the bioreactor is immersed in a water bath where the temperature is maintained at $30 \pm 2^\circ\text{C}$. The fermentation is carried out under anaerobic conditions for 72 hours [5]. However, the fermentation is promoted by agitation due to the movement of bubbles of CO_2 released.

During the fermentation, we followed:

- pH evolution ;
- Total sugars;
- The density;

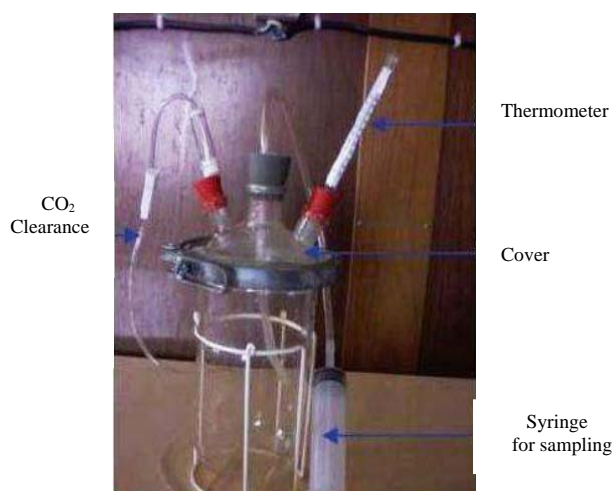


Fig. 2 Bioreactor of fermentation

3. Alcoholic Distillation

At the end of fermentation, the wine is distilled to extract ethanol. The distillation temperature is about 78°C [5].

D. Analytical Techniques

1. Determination of pH

PH determination is essential to the control of the must before and during fermentation. Its variation provides information on the metabolic activity of the yeast during the conversion of sugars into alcohol. PH determination is accomplished by a direct reading with a pH meter

2. Density Determination

The density was determined using a density bottle of capacity 10 cm^3 .

3. Determination of Total Sugars

The determination of total sugars is performed by the method introduced by Dubois.

4. Determination of Alcohol Degree

It was determined using a hydrometer (graduated from 0 to 100°) [6].

IV. RESULTS AND DISCUSSIONS

In what follows, we analyze the results of physicochemical must dates for fermentation time 0h, 24h, 48h and 72h respectively. Figs. 3-5 are shown below summarize all of these values.

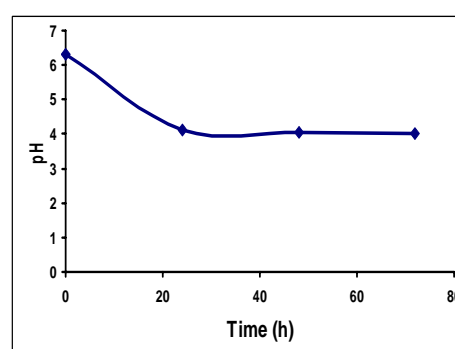


Fig. 3 Evolution of pH during the fermentation

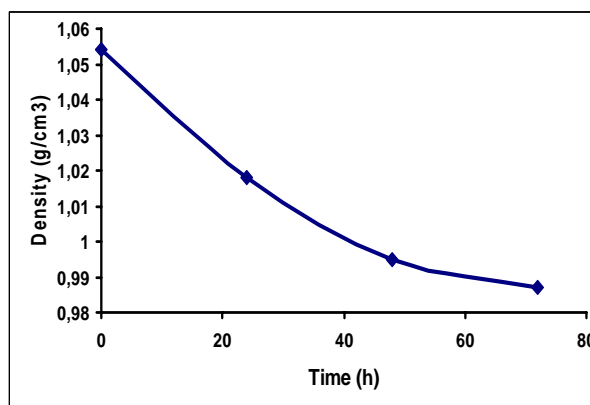


Fig. 4 Evolution of density during the fermentation

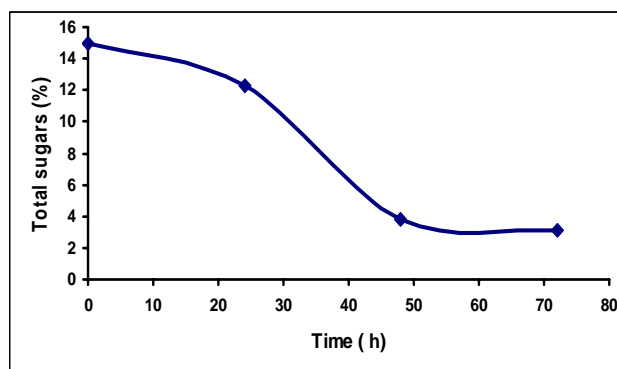


Fig. 5 Evolution of total sugars during the fermentation

In the light of these results, we can see that after 72 hours of fermentation of musts, a significant degradation of total sugars is revealed, this transformation was especially active during the first 48 hours. This result is consistent with that reported by Elokaidi (1987), which referred to a fermentation time between (36 and 72 hours) [7].

However, total sugars were not completely consumed by the yeast; this may be due to the cessation of growth of the yeast *Saccharomyces cerevisiae* and that by the accumulation of toxic substances [8].

Sasson [9] reported that fatty acids, especially octanoique and decanoique acid formed by the yeast concentration in milligrams per liter, become toxic to yeast [9].

The evolution of Ph and density shown in Figs. 3, 4 respectively for a time fermentation equal at 0h, 24h, 48h and 72 h showed a remarkable decrease, who is explained by the alcohol conversion of glucose and loss of mass as CO_2 .

The alcohol produced in the laboratory has the following characteristics: volatile, flammable, clear, with a pungent odor.



Fig. 6 Ethanol produced in the laboratory

TABLE I
ETHANOL PRODUCT CHARACTERISTIC

Mean Values of the Parameters	Ph	Density (G/Cm ³)	Alcohol (Rectification)
Ethanol	5.639	0.8752	88°

The average values of physicochemical parameters of alcohol produced from the waste of dates are listed in Table I.

A. Infrared Spectrum of the Final Product

Vibrations of the following bands are noted:

- 2900 cm^{-1} : stretching vibration corresponding to the CH group;
- 3300 cm^{-1} : OH stretching vibration corresponding to a specific alcohol.

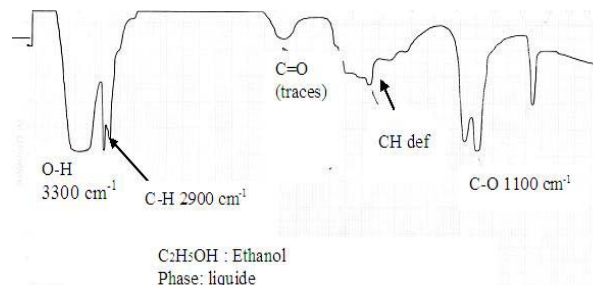


Fig. 7 Infrared spectrum of the final product

V. CONCLUSION

Common dates of low market value are a preferred substrate for the implementation of a process for producing industrial alcohol given the simplicity of the process.

REFERENCES

- [1] A. Touzi, 'Valuation Products and Sub-products Biotechnological Processes by Dattes', Proceedings of the Mediterranean Seminar: The Date Palm Oasis Agriculture in the Mediterranean Countries. Options Mediterranean, No. 28, 1996.
- [2] EM Messar, 'The Algerian date sector - Situation and Outlook Horizon 2010', Proceedings of the Mediterranean Seminar: The Date Palm Oasis in the Mediterranean countries. Options Mediterranean, No. 28, 1996.
- [3] MD Ould El Hadj, 'Study Comparative Productivity Alcohol Gross Dates according to Variety', Agricultural Research, No. 9, p. 91-99, National Institute of Agronomic Research, Algeria, 2001.
- [4] D. Fabienne 'fermentation engineering' Doin Edition Publishers, p. 226-229, Paris, 1991
- [5] F. Kaidi and A. Touzi, 'Production bioalcohol Starting Dates of Waste', Journal of Renewable Energies, NS: Biomass Production and Valuation, p. 75-78, 20-21 June 2001 Algiers.
- [6] D.J. Nadhim, 'Production d'Ethanol à partir des Sucres de Dattes', Séminaire sur les Dattes, pp. 115 - 130, 4-5 Décembre, Bagdad, Irak, 1982.
- [7] H.K.H. El Ogaïdi, 'Dates and Confectionery Product', FAO, Rome, 1987.
- [8] A. Meyer, 'Cours de Microbiologie Générale', Ed. Doin Editeurs, 1988.
- [9] A. Sasson, 'Nourrir Demain les Hommes', 765 p., Ed. UNESCO, Pays Bas, 1986.