

# Scintigraphic Image Coding of Region of Interest Based On SPIHT Algorithm Using Global Thresholding and Huffman Coding

A. Seddiki, M. Djebbouri, D. Guerchi

**Abstract**—Medical imaging produces human body pictures in digital form. Since these imaging techniques produce prohibitive amounts of data, compression is necessary for storage and communication purposes. Many current compression schemes provide a very high compression rate but with considerable loss of quality. On the other hand, in some areas in medicine, it may be sufficient to maintain high image quality only in region of interest (ROI). This paper discusses a contribution to the lossless compression in the region of interest of Scintigraphic images based on SPIHT algorithm and global transform thresholding using Huffman coding.

**Keywords**—Global Thresholding Transform, Huffman Coding, Region of Interest, SPIHT Coding, Scintigraphic images.

## I. INTRODUCTION

THE massive use of the digital terms in medical imaging produces volumes of data more increasingly important. Compression of digital images becomes a necessity to ensure their archiving on the one hand and facilitate their transmission on the other. For a good number of medical images, clinical information is concentrated in one or more regions of the image. An approach that brings a high compression rate with good quality in the ROI is thus necessary.

The general idea is to preserve quality in diagnostically critical regions, while allowing lossily encoding the other regions. It is in this framework that is this present work. After the evolution of digital imaging techniques, many researchers have attempted to apply compression methods to medical data. The lossless compression studies have all resulted in low compression rate. Transform coding schemes such as DCT transform and wavelet transform (DWT) were applied [1]-[3] to get better rates. In order to achieve higher compression rates without detracting from quality, region of interest based methods were investigated [4], [5].

In this paper, we propose a compression algorithm by region of interest of the scintigraphic image based on SPIHT

algorithm and global transform thresholding using Huffman coding.

The paper is organized as follows. Section II describes the proposed process of compression. Section III explains experimental results and discussion. Finally, a conclusion is given in Section IV.

## II. THE PROCESS OF COMPRESSION

The block diagram in Fig. 1 describes the process of our coding scheme. To find a good compromise between compression ratio and the clinical information of the medical image, we thought of implementing an algorithm by areas of interest (regions of interest: ROI).

Indeed, the ROI will be coded without loss with SPIHT algorithm [6]-[8] using the classic SPIHT algorithm adapted to the lossless compression while the difference image will be encoded with losses representation using global thresholding and Huffman coding.

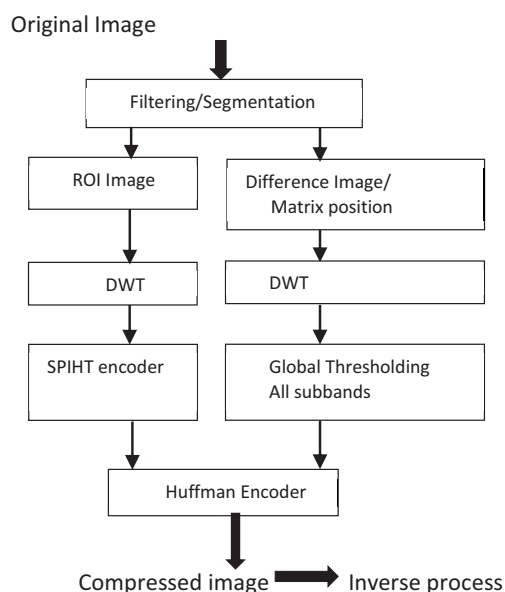


Fig. 1 Description of the Proposed Coding scheme

### A. Selection of the Regions of Interest ROI

The principle of scintigraphy is to get the image of a body after injection of a weakly radioactive solution in a body and save the emitted radiation over time. The quantity of

A. Seddiki is with the Telecommunications & Digital Signal Processing Laboratory, and Electronic Engineering Department of the Faculty of Technology, University of Sidi-Bel-Abbes, Algeria (e-mail: seddiki\_ali@msn.com).


M. Djebbouri is with the Electronic Engineering Department of Faculty of Technology, University of Sidi-Bel-Abbes, Algeria (e-mail: mdjebbouri@gmail.com).

D. Guerchi is with the school of Engineering, applied science and technology, Canadian University of Dubai, UAE (e-mail: driss@cud.ac.ae).


registered radiation to learn more about the activity of the body explored.

Clinical information locates so in fixation of the radiopharmaceutical product areas, which thus define the areas of interest.

The selection of the ROI is by application of 3 stages: filtering, enhancement and segmentation [9]. The image is thus partitioned into two parts, as shown in Fig. 2.

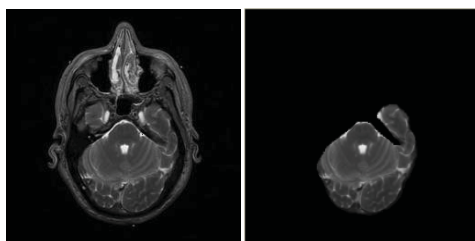

(a) Original Image (b) Region of Interest ROI



(c) Difference Image (remaining area)

Fig. 2 Scintigraphic image Partition

*B. Encoding of DWT Coefficients*

The SPIHT algorithm operates on a wavelet transformed image with equal length and width of an integer power of 2 [10]. It encodes the wavelet coefficients in a way that uses a hierarchical organization of the coefficients. This algorithm, which is based essentially on differencing between significant and insignificant pixels, allows sending high order bits of coefficients before low order bits.

In our proposed method, the coefficients in all sub-bands of the ROI image (selected part of the original image) are encoded directly by SPIHT encoder followed by Huffman coder without thresholding (high frequencies coefficients in sub-bands are considered important for ROI). We also need to encode in a lossless manner and transmit a position matrix in order to delimit border and position of the ROI image. This issue guarantees to us to reduce the effect of border in the reconstructed image between ROI image and remaining image. After introducing many zeros in all sub-bands of the remaining area due to the global thresholding, we encode the coefficients by Huffman coder to convert redundant data into bit stream. The use of Huffman encoder makes compressed data ready for transmission.

III. SIMULATION RESULTS

For measuring the originality of the compressed image, Peak Signal to Noise Ratio (PSNR) is used,

$$PSNR (dB) = 10 \log_{10} (255)^2 / MSE \tag{1}$$

where MSE is the mean squared error between the original image  $I_{ij}$  and the reconstructed compressed image  $I'_{ij}$  of the size  $MN$ , which is calculated by,

$$MSE = \frac{1}{MN} \sum_{j=1}^M \sum_{i=1}^N |I'_{ij} - I_{ij}|^2 \tag{2}$$


We conducted several simulations on a group of medical images in order to test the effect of the proposed coding method.

The measurements were performed for different level of decomposition using bior4.4 wavelet for DWT with 13/19 tap filter in first stage and 14/14 tap filter beyond level one. For different size medical images, and different form of region of interest, we applied the following steps,


1. Selection of region of interest,
2. Compress the image of the remaining (Fig. 2 (c)) with global thresholding and Huffman coding,
3. Compress the position matrix of ROI and the ROI image (Fig. 2 (b)) with SPIHT coder and Huffman coding.

TABLE I  
PERFORMANCE CODING FOR IMAGE 'MRI.BMP'

Level-1 decomposition		Level-2 decomposition		Level-4 decomposition	
bpp	PSNR(dB)	bpp	PSNR(dB)	bpp	PSNR(dB)
2	35,41	1.5	32,12	0.6	29,012
3.4	36,432	1.76	34,031	0.7	29,87
4.2	36,61	1.9	34,87	0.8	31,32

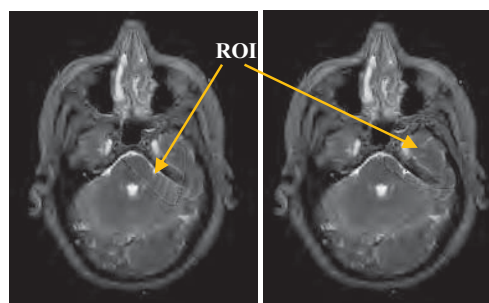

(a) bpp =1,2 (b) bpp =1,5

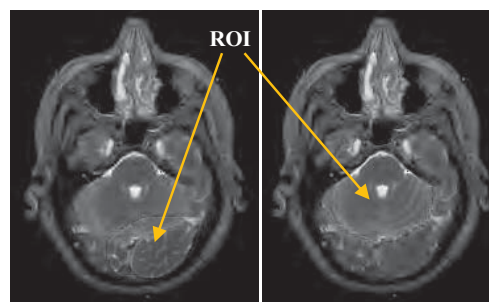

(c) bpp =1,9 (d) bpp =0,8

Fig. 3 Reconstructed image for different ROI position at various 'bpp' (Table III)

The results are presented in Tables I and II. Figs. 3 and 4 show the reconstructed images at various bit rates and at different positions of ROI. In Figs. 3 and 4, we can see that regions of interest present good image quality at low bpp (PSNR = 31,3 dB) and the other part of the original image is compressed with loss manner procedure.

Observing results, we conclude that PSNR is inversely proportional to compression ratio (CR). At first level of decomposition 'bpp' is more than higher levels due that low sub-bands requires more numbers of bits. The total number of bit required to compress the scintigraphic image decreases as we set up the level of decomposition. Slight reduction in image quality is observed.

TABLE II  
PERFORMANCE CODING FOR IMAGE 'THORAX.BMP'

Level-1 decomposition		Level-2 decomposition		Level-4 decomposition	
bpp	PSNR(dB)	bpp	PSNR(dB)	bpp	PSNR(dB)
2	32,97	1,2	31,5	0,55	29,8
2,9	33,012	1,4	31,7	0,7	30,865
4,1	34,32	1,8	32,14	0,8	31,45

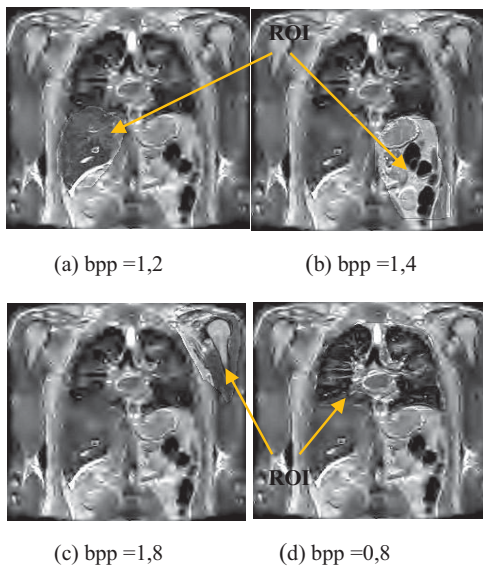


Fig. 4 Reconstructed image for different ROI position at various 'bpp' (Table II)

We achieve good CR at level 4 of wavelet decomposition. Highest CR achieved with proposed method is 42% for image 'thorax.bmp' (PSNR= 29,8dB, bpp=0.55). Table III reveals that the proposed method is competitive with existing methods.

TABLE III  
COMPARISON WITH EXISTING METHOD (CBTC-PF [11])

Proposed method MRI image			CBTC-PT		
bpp	PSNR(dB)	CR	bpp	PSNR(dB)	CR
0,8	31,3	29,6	1,17	31,93	20,51
1,5	32,12	15,4	1,50	30,15	16
1,2	32,02	23,2	1,20	31,79	20
1,9	34,87	14,7	1,12	31,31	21,42

#### IV. CONCLUSION

In this work, we propose a method for compression based on region of interest of medical images using two algorithms based on SPIHT and Huffman coders. The original image is first divided into two images: one containing the regions of interest and another containing the rest, the first is coded without loss using SPIHT coding and the second is encoded with loss using global thresholding and Huffman coding.

A matrix of position of the ROI is also coded with loss and transmitted to the decoder to reduce border effect. Our proposed method has comparable results with low complexity. This issue of coding medical images is very interesting and allows us to compress only the important area in image (ROI) by lossless compression. The use of SPIHT coder for lossless compression shows interesting results and we have achieved good CR with proposed method (42%). The rest of the image has been coded by global threshold algorithm and Huffman coding which makes compression data ready for transmission.

#### REFERENCES

- [1] Z. Xiang, K. Ramachandran, M. T. Orchard and Y. Q. Zing, *A comparative study of DCT and Wavelet based image coding*, IEEE Transaction on Circuits Systems Video Technology, vol. 9, April 1999
- [2] R. Sudhakar, M. R. Karthiga and S. Jayaraman, *Image Compression using Coding of Wavelet Coefficients-A Survey*, ICGST-International Journal on Graphics, Vision and Image processing (GVIP), vol. 5, pp. 25-38, 2005.
- [3] F. Douak, R. Benzidi, and N. Benoudjit, *Color image compression algorithm based on the DCT transform combined to an adaptative block scanning*, AEU-International Journal of Electronics and Communication, vol. 65, pp 16-26, Jan. 2011
- [4] B.K.T. Ho, M.-J. Tsai, J. Wei, M. Ma, and P. Saipetch, *Video compression of coronary angiograms based on discrete wavelet transform with block classification*, IEEE Transactions on Medical Imaging, Dec. 1996.
- [5] M. D.Adams, and F. Kossentini, *Performance Evaluation of reversible integer to integer Wavelet Transforms for Image compression*, IEEE Trans on image Processing, vol. 9, pp1010-1024, June 2000.H. Poor, *An Introduction to Signal Detection and Estimation*. New York: Springer-Verlag, 1985, ch. 4.
- [6] J. Wang, F. Zhang, *Study of the image compression based on SPIHT algorithm*, IEEE International Conference on Intelligent Computing and cognitive Informatics(ICICCI), pp. 130-133, 2010.
- [7] H. Zhu, C. Xiu, and D. Yang, *An improvement SPIHT algorithm based on Wavelet coefficient blocks for image coding*, IEEE International Conference on Computer Application and System Modeling (ICCSM), vol. 2, pp. 646-649, 2010.
- [8] C. Xiu and H. Zhu, *A modified SPIHT algorithm based on Coefficient blocks for Robust Image Transmission over Noisy Channel*, IEEE International Symposium on information Science and Engineering (ISISE), pp. 58-61, 2010.
- [9] U. Qidawai, C. H. Chen, *Digital Image Processing: An Algorithmic Approach with Matlab*, CRC press, 2009.
- [10] A. Said, W. A. Pearlman, *A new, Fast and Efficient Image Codec Based on Set Partitioning in Hierarchical Trees*, IEEE Transactions on Circuits and Systems for Video Technology, vol.6, pp. 1-16, 1996.
- [11] B. Chandra, B. Chanda, *Color image compression based on block truncation coding using pattern fitting principle*, Pattern Recognition, vol. 40, pp. 2408-2417, Sept. 2007.

**Ali Seddiki** received Elect.-Eng. degree, Master degree, from Djillali-Liabes University, Sidi-bel-Abbes, Algeria, respectively in 1994, 1997, and a PhD degree in Electrical Engineering in 2006. He is currently an assistant professor at the Electronic Engineering Department of the University of Sidi-bel-Abbes. He is a research scientist in Telecommunication and Digital Signal Processing

Laboratory. His research interests include signal and medical image processing, wavelet applications, source coding, and image analysis.

**Mohamed Djebbouri** received the M.Sc. degree from the University of Laval, Canada in 1990 and the thesis d'état from the University of Sidi-bel-Abbes, Algeria, in 2004. His main interest is signal and image processing.

**Driss Guerchi** is currently associate professor and coordinator of the telecommunication program at the Canadian University of Dubai. He was an assistant Professor at the College of Information Technology, UAE University from 2001-2009. He received his PhD in Telecommunications from the National Institute of Scientific Research, and his Master degree in Physics from Canada, in 2001, University of Quebec at Montreal. His research interests include speech coding, speech steganography and signal processing.