

# Reliability Based Performance Evaluation of Stone Column Improved Soft Ground

A. GuhaRay, C. V. S. P. Kiranmayi, S. Rudraraju

**Abstract**—The present study considers the effect of variation of different geotechnical random variables in the design of stone column-foundation systems for assessing the bearing capacity and consolidation settlement of highly compressible soil. The soil and stone column properties, spacing, diameter and arrangement of stone columns are considered as the random variables. Probability of failure ( $P_f$ ) is computed for a target degree of consolidation and a target safe load by Monte Carlo Simulation (MCS). The study shows that the variation in coefficient of radial consolidation ( $c_r$ ) and cohesion of soil ( $c_s$ ) are two most important factors influencing Pf. If the coefficient of variation (COV) of  $c_r$  exceeds 20%,  $P_f$  exceeds 0.001, which is unsafe following the guidelines of US Army Corps of Engineers. The bearing capacity also exceeds its safe value for COV of  $c_s > 30\%$ . It is also observed that as the spacing between the stone column increases, the probability of reaching a target degree of consolidation decreases. Accordingly, design guidelines, considering both consolidation and bearing capacity of improved ground, are proposed for different spacing and diameter of stone columns and geotechnical random variables.

**Keywords**—Bearing capacity, consolidation, geotechnical random variables, probability of failure, stone columns.

## I. INTRODUCTION

EVALUATION of the stability of foundations resting on weak soil layers requires prediction of settlement. The provision of stone columns increases shear strength and decreases compressibility of the composite soil consisting of the stone column and the surrounding soil.

The theory of load transfer, estimation of ultimate bearing capacity and prediction of settlement of stone columns was first proposed by Greenwood [1]. Research showed that the maximum radial soil reaction against bulging was one of the major factors for determining ultimate bearing capacity of soil. It was also shown that the vertical movement of stone column was limited to four times the diameter of the column [2]. A mathematical model for consolidation rate was proposed considering the clogging effect [3]. However, most of the reported studies are based on deterministic approach. Since soil is a natural material, its properties are bound to vary from place to place. A Factor of Safety (FS) is applied to design of structures, based on past experience to take into account this natural soil variability. This does not consider the amount of uncertainty associated with the system. For stone column-

improved ground radial coefficient of consolidation has the highest influence on the reliability results [4]. The reliability of Priebe's Method is also carried out for estimating settlement of stone columns [5]. A simplified probabilistic method was proposed in which the inherent variability of the coefficient of consolidation of the soil is considered [6]. Probability based design charts were suggested for estimating diameter and spacing for stone column improved ground [7]. A qualitative and quantitative improvement in soft clay by stone columns is carried out using finite element method considering a drained analysis of Mohr-Coulomb failure criteria [8]. A numerical model is proposed to analyse elastic and elasto-plastic behavior of stone-column reinforced foundations and implemented in an axi-symmetric finite element code [9].

From the above literature, it is observed that most of the reliability analysis of soil consolidation via vertical drain is conducted on PVD-improved ground. Limited studies are conducted on stone column-improved ground. The present paper studies the effect of variation of six different geotechnical random variables on bearing capacity and consolidation settlement of stone columns. Probability of failure ( $P_f$ ) is analysed for two target degrees of consolidation of 85% and 95% and three target safe loads of 200 kN, 300 kN and 400 kN. The analysis is carried out by MCS in commercially available software MATLAB R2015a. Finally design guidelines are proposed for different dimension of stone columns and variations of geotechnical random variables, which may lead to a safe and economic design.

## II. BEARING CAPACITY OF STONE COLUMNS

The triangular and square arrangements of stone columns are shown in Figs. 1 (a) and (b). The bearing capacity of stone columns is calculated in accordance with IS 15284 (Part 1): 2003 [10]. The overall bearing capacity of a stone column is obtained by summing up the contribution of

- Capacity of the column resulting from the resistance of the soil surrounding it against bulging.
- Capacity due to the resistance offered by the soil due to the surcharge effect.
- Capacity due to the bearing support given by intervening soil between the columns.

For soils having cohesion,  $c$  and angle of internal friction,  $\phi$ , the bearing capacity is determined by Bell's formula which is:

$$\sigma_{rL} = P_p = \gamma z k_p + 2c_u \sqrt{k_p} \quad (1)$$

A. GuhaRay is with Civil Engineering Department, BITS-Pilani Hyderabad Campus, Hyderabad, India, (corresponding author; phone: +918956515697; fax: +914066303998; e-mail: anasua08@gmail.com).

Kiranmayi CVSP and S. Rudraraju are with Civil Engineering Department, BITS-Pilani Hyderabad Campus, Hyderabad, India. (e-mail: kirani.cv.95@gmail.com, snigdha.rudraraju@gmail.com).

where,  $P_p$  = passive pressure,  $z$  = average bulge depth =  $2d_c$ ,  $d_c$  = diameter of stone column,  $D_e$  = equivalent diameter of stone column, which is 1.05 and 1.13 times the spacing for triangular and square pattern of arrangement of columns respectively.  $k_p$  = coefficient of passive pressure and  $\phi_g$  = angle of internal friction of stone column.

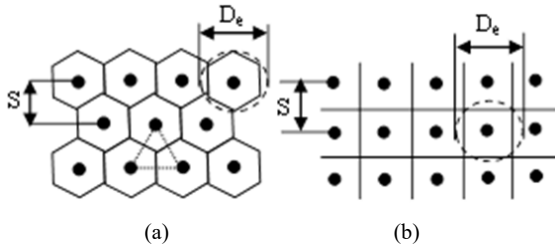


Fig. 1 (a) Triangular and (b) Square Arrangement of Stone Columns

Limiting axial stress in the column is given by

$$\sigma_v = \sigma_{rl} \cdot K_{pcol} = \sigma_{rl} \left( \frac{1 + \sin \phi_c}{1 - \sin \phi_c} \right) \quad (2)$$

where,  $\phi_c$  = angle of internal friction of granular column material. Therefore, safe load on column considering a FS 2, is

$$Q_1 = \left( \frac{\sigma_v \cdot \pi \cdot d_c^2}{4} \right) \cdot \frac{1}{2}$$

Safe bearing pressure of soil with a FS = 2.5, is

$$q_{safe} = \left( \frac{C_u \cdot N_c}{2.5} \right)$$

Considering the surcharge effect, the increase in the mean radial stress due to surcharge,

$$\Delta \sigma_{ro} = q_{safe} \left( \frac{1 + 2 \cdot K_p}{3} \right) \quad (3)$$

By considering a FS of 2, the increase in safe load of column,

$$Q_2 = \left( \frac{K_{pcol} \cdot \Delta \sigma_{ro} \cdot \pi \cdot d_c^2}{4} \right) \cdot \frac{1}{2} \quad (4)$$

Considering bearing support provided by the intervening soil, the area of the intervening soil is  $A_g = 0.866(S^2) - \left( \frac{\pi \cdot d_c^2}{4} \right)$

for triangular arrangement and  $A_g = S^2 - \left( \frac{\pi \cdot d_c^2}{4} \right)$  for square arrangement. Safe load that can be taken by the intervening soil is

$$Q_3 = q_{safe} \cdot A_g \quad (5)$$

Therefore, the overall safe bearing capacity of each stone column is obtained by

$$Q_{allowable} = Q_1 + Q_2 + Q_3 \quad (6)$$

### III. CONSOLIDATION OF STONE COLUMNS

In the present study, the radial rate of consolidation ( $U_r$ ) is considered for analysis and is calculated as) [11].

$$U_r' = 1 - \left( \frac{8}{\pi^2} \exp \left( \frac{-8T_r'}{F(N)} \right) \right) \quad (7)$$

where

$$F(N) = \left( \frac{N^2}{N^2 - 1} \right) \ln(N) - \left( \frac{3N^2 - 1}{4N^2} \right),$$

Diameter Ratio ( $N$ ) is

$$N = \frac{D_e}{d_c},$$

Modified Time Factor ( $T_r'$ ) is

$$T_r' = \frac{C_r' \cdot t}{D_e^2}$$

Modified Coefficient of Radial Consolidation ( $C_r'$ )

$$C_r' = C_r \left( 1 + \frac{n_s}{N^2 - 1} \right)$$

Modular Ratio ( $n_s$ )

$$n_s = \xi \frac{E_c}{E_s}$$

$E_c$  and  $E_s$  are moduli of elasticity of stone column and soil respectively.

$$\xi = \frac{(1 + \mu_s)(1 - 2\mu_s)(1 - \mu_c)}{(1 + \mu_c)(1 - 2\mu_c)(1 - \mu_s)}$$

$\mu_c$  and  $\mu_s$  are Poisson's ratio of stone column and soil respectively.

### IV. DETERMINISTIC ANALYSIS

The diameter ratio ( $N$ ) of stone columns is considered in the range of 2-6, depending upon the arrangement of stone columns (square or triangular) [12]. A constant depth of 6 m is considered with spacing ( $S$ ) varying from 1 m to 4 m. Tables I and II summarise the different cases considered depending on the values of  $N$  and  $S$  for triangular and square pattern of arrangement respectively.

TABLE I  
CASES FOR TRIANGULAR PATTERN

Case	$S/d_c$	$S$ (m)	$d_c$ (m)	$D_e = 1.05S$	$N = D_e/d_c$
I	2.38	1.0	0.42	1.05	2.5
II	3.33	1.5	0.45	1.58	3.5
III	4.29	2.0	0.47	2.10	4.5
IV	5.55	2.5	0.45	2.63	5.5
V	4.54	3.0	0.66	3.15	4.5
VI	3.33	3.5	1.05	3.68	3.5
VII	2.38	4.0	1.68	4.20	2.5

TABLE II  
CASES FOR SQUARE PATTERN

Case	$S/d_c$	$S$ (m)	$d_c$ (m)	$D_e = 1.13S$	$N = D_e/d_c$
I	2.22	1.0	0.45	1.130	2.5
II	3.13	1.5	0.48	1.695	3.5
III	4.00	2.0	0.50	2.260	4.5
IV	4.90	2.5	0.51	2.825	5.5
V	4.00	3.0	0.75	3.390	4.5
VI	3.10	3.5	1.13	3.955	3.5
VII	2.21	4.0	1.81	4.520	2.5

TABLE III  
STATISTICS OF INPUT PARAMETERS

Variables	Mean $\mu$	COV (%)	Distribution
$\phi_s$ (°)	15	5-20	Log-Normal [13]
$c_s$ (kN/m <sup>2</sup> )	25	20-50	Log-Normal [14]
$\gamma_s$ (kN/m <sup>3</sup> )	20	7	Gaussian [15]
$\phi_c$ (°)	38	5-20	Log-Normal [12]
$c_r$ (m <sup>2</sup> /yr)	2	10-90	Log-Normal [12]
$E_s$ (kN/m <sup>2</sup> )	300 $c_s$	20-50	Log-Normal [4]
$E_c$ (kN/m <sup>2</sup> )	30000	30	Log-Normal [4]
$\mu_s$	0.4	-	- [16]
$\mu_c$	0.2	-	- [16]

According to Mitchell [12], the safe superstructure load ( $Q_{superstructure}$ ) for stone columns in soft to medium stiff clays lies in the range of 200 – 300 kN. In the present study, three different target safe superstructure loads are considered (200, 300 and 400 kN). Two target degrees of consolidation ( $U_{target}$ ) considered are 85% and 95% in a time frame of 3, 6, 9 and 12 months. The factors of safety against bearing and consolidation are defined as:

$$FS(bearing) = \frac{Q_{allowable}}{Q_{superstructure}} \text{ and } FS(consolidation) = \frac{U_{achieved} (=U_r')}{U_{target}}$$

The mean values of the geotechnical random variables, their COV and statistical distribution are considered from past research works, in absence of any site data, and are summarized in Table III. FS obtained by deterministic analysis for different cases of triangular and square arrangements corresponding to different target safe loads and target degrees of consolidation are summarized in Tables IV and V. It can be seen from Table IV that FS against bearing capacity increases with increase in spacing and diameter ratio. Minimum FS is observed for a spacing of 1 m and diameter ratio of 2.5. However, it is difficult to achieve the target degree of consolidation within a target period of time with increase in

the spacing and diameter ratio of the stone columns.

TABLE IV  
DETERMINISTIC FACTORS OF SAFETY FOR BEARING CAPACITY

Cases	FS for Triangular Arrangement			FS for Square Arrangement		
	$Q=200$ kN	$Q=300$ kN	$Q=400$ kN	$Q=200$ kN	$Q=300$ kN	$Q=400$ kN
I	2.22	1.48	1.11	2.57	1.71	1.29
II	4.09	2.72	2.04	4.73	3.15	2.37
III	6.59	4.39	3.29	7.63	5.09	3.82
IV	9.78	6.52	4.89	11.31	7.54	5.66
V	14.98	9.98	7.49	17.34	11.56	8.67
VI	22.99	15.33	11.49	26.69	17.79	13.34
VII	39.46	26.31	19.73	46.10	30.73	23.05

TABLE V  
DETERMINISTIC FACTORS OF SAFETY FOR CONSOLIDATION SETTLEMENT

Cases	$U_{target} = 85\%$				$U_{target} = 95\%$			
	$t=0.25$	0.5	0.75	1.0	$t=0.25$	0.5	0.75	1.0
I	1.17	1.17	1.17	1.17	1.05	1.17	1.17	1.17
II	1.12	1.17	1.17	1.17	1.01	1.05	1.05	1.05
III	0.88	1.08	1.14	1.16	0.79	0.97	1.02	1.04
IV	0.65	0.89	1.02	1.09	0.58	0.79	0.91	0.97
V	0.61	0.84	0.98	1.06	0.54	0.75	0.87	0.94
VI	0.62	0.86	0.99	1.07	0.56	0.76	0.89	0.95
VII	0.76	0.99	1.09	1.14	0.68	0.89	0.98	1.02

## V. PROBABILISTIC ANALYSIS

### A. Probability of Failure

The random variables  $\phi_s$ ,  $\gamma_s$ ,  $c_s$ ,  $\phi_c$  and  $c_r$  (Table III) are considered statistically independent of each other. For the probabilistic analysis of the stone column improved ground, a performance function is defined as  $g_i(x) = (FS)_i - 1$ , where  $i$  denotes the two different failure modes. Failure occurs when  $g_i(x) < 0$ . In the present study, the limit equilibrium equations are coded in commercially available software MATLAB R2015a and  $P_f$  is obtained by MCS by generating 50,000 data points.

#### Case 1: Effect of Variation of $\phi_c$

$P_f$  for bearing capacity failure obtained for different spacing and diameter ratio of stone columns, corresponding to different variations of  $\phi_c$ , are shown in Fig. 2 (a). Since  $\phi_c$  does not directly affect the consolidation settlement, hence this section only deals with  $P_f$  for bearing capacity failure. From the figure, it is quite evident that when  $S = 1$  m and  $N = 2.5$ , the  $P_f$  is above the acceptable limit for any variation of  $\phi_c$ . Fig. 2 (b) shows the variations of  $P_f$  for the three different target loads for  $S = 1$  m and  $N = 2.5$ . It may be concluded that for the assumed mean values of the geotechnical random variables, the stone column can sustain a maximum safe load of 200 kN, considering any variation of the random variables and any arrangement of the stone columns.

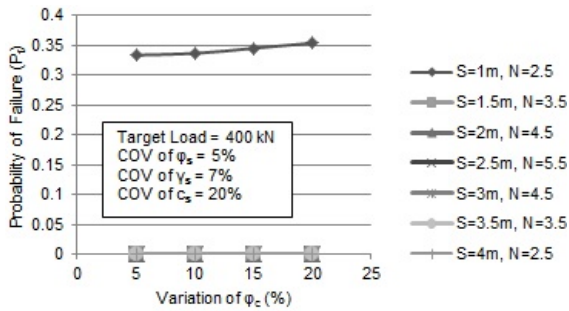


Fig. 2 (a)  $P_f$  for different variations of  $\phi_c$  for different spacing and diameter ratios

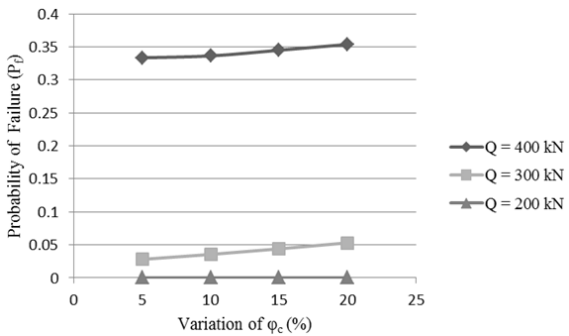


Fig. 2 (b)  $P_f$  for different variations of  $\phi_c$  for different target loads

Case 2: Effect of Variation of  $\phi_s$

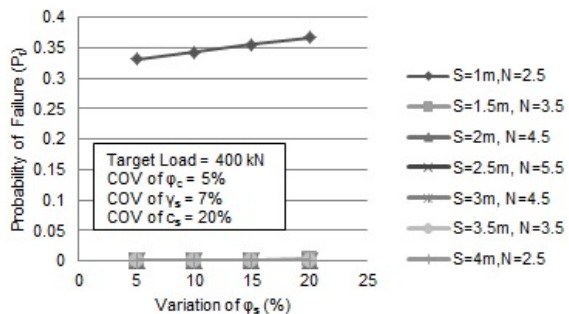


Fig. 3  $P_f$  for different variations of  $\phi_s$  for different spacing and diameter ratios

Secondly, the effect of variation of internal angle of friction of soil ( $\phi_s$ ) on bearing capacity failure is analyzed (Fig. 3). It is noted from the figure that the  $P_f$  shows a similar variation as in Case 1. This shows that  $\phi_s$  and  $\phi_c$  have almost similar effect on the bearing capacity of a stone column improved ground.

Case 3: Effect of Variation of  $c_s$

The cohesion of soil ( $c_s$ ) affects the bearing capacity as well as the consolidation settlement characteristics of a stone column improved ground. Fig. 4 demonstrates the  $P_f$  for different spacing and diameter ratios corresponding to different variations on  $c_s$ . It can be inferred from the figure that when  $COV$  of  $c_s$  exceeds 20%, the  $P_f$  crosses the acceptable limits when the spacing and diameter ratio of stone columns are less than 1.5 m and 3.5 respectively.

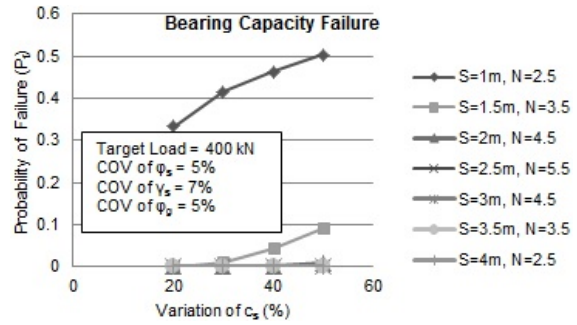


Fig. 4  $P_f$  for different variations of  $c_s$  for different spacing and diameter ratios

The effect on  $FS$  due to variation of  $c_s$  and in consequence,  $E_s$ , on consolidation settlement of stone column improved ground is relatively small. Variation of  $c_s$  from 20% to 50% has no effect on the consolidation settlement when spacing and diameter ratio of stone columns are less than 1.5 m and 3.5 respectively for 85% target degree of consolidation in 3 months. If the time frame is extended to 6 months, there will be no effect on consolidation for stone columns having spacing and diameter ratio less than 2 m and 4.5 respectively. For 85% consolidation to be achieved in 9 months, the same may be considered as 2.5 m and 5.5 respectively. However, it may be observed that the target degree of consolidation can be achieved for any variation of  $c_s$  and for all spacing and diameter ratios when the time span exceeds 1 year. For a target degree of consolidation of 95% and time frame of 3 months, spacing and diameter ratio of stone columns should be less than 1 m and 2.5 respectively, while for 6 months, it should be restricted to 1.5 m and 3.5 respectively. For a target time between 6 and 12 months, the spacing and diameter ratio should be limited to 2 m and 4.5 respectively.

Case 4: Effect of Variation of  $c_r$

The variation of coefficient of radial consolidation ( $c_r$ ) has a significant effect on the probability of failure of the stone columns against consolidation settlement. Figs. 5 (a) and (b) show the  $P_f$  against consolidation settlement for variation of  $c_r$ , time, spacing and diameter ratio of stone columns corresponding to 85% and 95% target degree of consolidation. It may be observed from Fig. 5 that, unlike bearing capacity,  $P_f$  increases for higher values of spacing and diameter ratios.

From Figs. 5 (a) and (b), it can be inferred that, in order to achieve 85% target degree of consolidation in a time period of 3 months, the spacing and diameter ratio needs to be restricted within 1.5 m and 3.5 respectively. When the target degree of consolidation is 95%; keeping all other conditions same, the spacing and diameter ratio needs to be limited within 1 m and 2.5 respectively. To achieve the target degree of consolidation within 1 year, the spacing and diameter ratio should always be limited to 1.5 m and 3.5, for any values of  $COV$  of  $c_r$ . Only one case is shown in Figs. 5 (a) and (b).

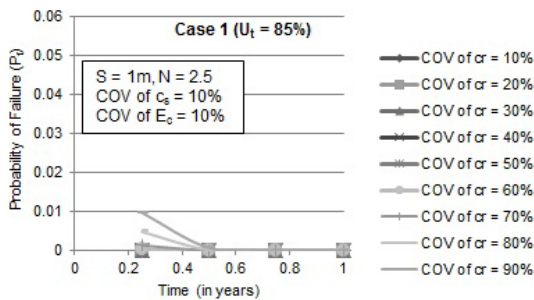


Fig. 5 (a)  $P_f$  for different variations of  $c_r$ , for  $S = 1$  m and  $N = 2.5$

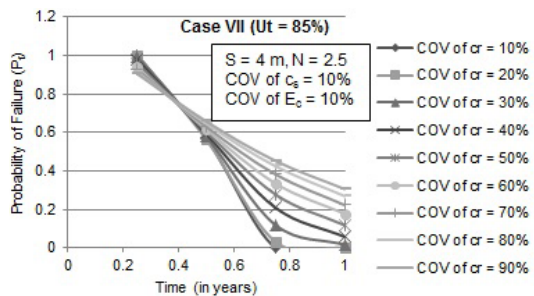


Fig. 5 (b)  $P_f$  for different variations of  $c_r$ , for  $S = 1$  m and  $N = 2.5$

**B. Combined Probability of Failure**

Considering bearing and consolidation failure as independent events, failure will occur if the stone columns fail either in bearing or consolidation. Mathematically,

$$\begin{aligned}
 P_f(\text{combined}) &= P_f(\text{bearing} \cup \text{consolidation}) \\
 &= P_f(\text{bearing}) + P_f(\text{consolidation}) - P_f(\text{bearing} \cap \text{consolidation}) \\
 &= P_f(\text{bearing}) + P_f(\text{consolidation}) \quad [\because \text{events are independent}]
 \end{aligned}$$

The design guidelines for 85% and 95% consolidation in a time frame of 6 months are provided in Table VI.

TABLE VI  
DESIGN GUIDELINES FOR  $T = 6$  MONTHS

COV of $c_r$	$U_t = 85\%$			$U_t = 95\%$		
	COV of $c_s$			COV of $c_s$		
	20	30	40	20	30	40
10	$S=1.5 - 2m,$ $N=3.5 - 4.5$	$S=2m,$ $N=4.5$	$S=2m,$ $N=4.5$	$S=1.5m, N=3.5$		
20	$S=1.5m, N=3.5$			$S=1.5m, N=3.5$		
30	$S=1.5m, N=3.5$			$S=1.5m, N=3.5$		
40	$S=1.5m, N=3.5$			$S=1.5m, N=3.5$		
50	$S=1.5m, N=3.5$			$S=1.5m, N=3.5$		
60	$S=1.5m, N=3.5$			$S=1.5m, N=3.5$		
70	$S=1.5m, N=3.5$			$S=1.5m, N=3.5$		
80						
90						

**VI. CONCLUSIONS**

In the present study, the effect of variation of geotechnical random variables on bearing and consolidation of stone column improved ground are studied. It is observed that the variation of internal angle of friction of soil ( $\phi_s$ ) and stone column ( $\phi_c$ ) have maximum effect on bearing capacity of

stone column improved ground, while for consolidation settlement, the effect of variation of the coefficient of radial consolidation ( $c_r$ ) is found to be most significant. In order to achieve 85% target degree of consolidation in a time period of 3 months for a target reliability index of  $\beta = 3$  and COV of  $c_r$  within 20%, the spacing and diameter ratio needs to be restricted within 1.5 m and 3.5 respectively. Accordingly, design guidelines for spacing and diameter ratio are provided for different target degrees of consolidation in varying time frames.

**REFERENCES**

- [1] D.A. Greenwood, "Mechanical Improvement of soils below ground surface." *Conf. on Ground Engg. Institution of Civil Engineers*, London, 1970, pp.11-22.
- [2] A.P. Ambily and S.R. Gandhi, "Behavior of stone columns based on experimental and FEM analysis." *J. Geotech. Geoenviron. Eng., ASCE*, Vol. 133, No. 4, 2007, pp. 405-415.
- [3] K. Deb and S. Shiyamala, "Effect of Clogging on Rate of Consolidation of Stone Column-Improved Ground by Considering Particle Migration." *Int. J. Geomech.*, 10.1061/(ASCE)GM.1943-5622.0000492, 2015, 04015017.
- [4] J. Alonso and R. Jimenez, "Reliability analysis of stone columns for ground improvement." *GeoRisk, ASCE*, 2011, pp. 493-500.
- [5] S.C. Douglas and V.R. Schaefer, "Reliability of the Priebe method for estimating stiffness." *Ground Improvement*, Vol. 167 (G12), 2012, pp. 108-121.
- [6] M.W. Bari and M.A. Shahin, "Probabilistic design of ground improvement by vertical drains for soil of spatially variable coefficient of consolidation." *Geotext. Geomem.*, Vol. 42, No. 10, 2014, pp. 1-14.
- [7] K. Deb and A. Majee, "Probability-based design charts for stone column-improved ground." *Geomechanics and Engineering*, Vol. 7, No. 5, 2014, pp. 539-552.
- [8] A. Choobbasti, A. Zahmatkesh and R. Noorzad, "Performance of Stone Columns in Soft Clay: Numerical Evaluation." *International Journal of Geotechnical and Geological Engineering*, Vol. 29, No. 5, 2011, pp. 675 - 684.
- [9] J.S Lee and G.N Pande, "Analysis of stone-column reinforced foundations." *International Journal for Numerical and Analytical Methods in Geomechanics*, Vol. 22, No. 12, 1998, pp. 1001-1020.
- [10] IS 15284 (Part 1). "Design and Construction for Ground Improvement - Guidelines: part 1 stone column", 2003.
- [11] Han J. and Ye S.L., "A Theoretical Solution for Consolidation rates of Stone Column-Reinforced Foundations Accounting for Smear and well-resistance effects", *The International Journal of Geomechanics*, Vol. 2 No. 2, pp. 135-151, 2002.
- [12] J.K. Mitchell, "Soil improvement - State of the art report." *Proceedings of the 10th ICSMFE*, Stockholm, The Netherlands, June, 4, 1981, pp. 509-565.
- [13] J.M. Duncan, "Factors of Safety and Reliability in Geotechnical Engineering." *J. Geotech. Geoenviron.Eng., ASCE*, Vol. 126, No. 4, 2000, pp. 307-316.
- [14] G.B. Baecher and J.T. Christian, "Reliability and Statistics in Geotechnical Engineering." *Wiley, New York*, 2003.
- [15] M.R. Madhav and P.P. Vitkar, "Strip footing on weak clay stabilised with granular trench or piles." *Can. Geotech. Jnl.*, Vol. 15, No. 4, 1978, pp.605-609.
- [16] J.E. Bowles, "Foundation Analysis and Design." *McGraw Hill Higher Edn*, 5th edn, 2001.