

# Analysis of Linear Equalizers for Cooperative Multi-User MIMO Based Reporting System

S. Hariharan, P. Muthuchidambaranathan

**Abstract**—In this paper, we consider a multi user multiple input multiple output (MU-MIMO) based cooperative reporting system for cognitive radio network. In the reporting network, the secondary users forward the primary user data to the common fusion center (FC). The FC is equipped with linear equalizers and an energy detector to make the decision about the spectrum. The primary user data are considered to be a digital video broadcasting - terrestrial (DVB-T) signal. The sensing channel and the reporting channel are assumed to be an additive white Gaussian noise and an independent identically distributed Rayleigh fading respectively. We analyzed the detection probability of MU-MIMO system with linear equalizers and arrived at the closed form expression for average detection probability. Also the system performance is investigated under various MIMO scenarios through Monte Carlo simulations.

**Keywords**—Cooperative MU-MIMO, DVB-T, Linear Equalizers.

## I. INTRODUCTION

CURRENTLY insufficiency in radio frequency spectrum has a serious setback because the present spectrum schemes cannot further hold an increase in the number of users. Therefore, CR (cognitive radio) technique is the likely solution to improve spectrum utilization by spectrum sharing. CR is an active wireless communication system that is aware of its location and access the idle radio frequency spectrum when the Primary User (PU) who holds the right to use the spectrum is idle [1]. The user(s) who access the idle/unused spectrum opportunistically is secondary user's (SU) and the SU has to detect the existence of the PU, for that, SU has to sense the spectrum every so often. The challenge in sensing the spectrum is SU should minimize the interference to the PU and should efficiently sense the spectrum holes

Cooperative spectrum sensing improves the detection probability under multipath fading, shadowing and receiver uncertainty by utilizing spatial diversity and it is well discussed in [2]-[5]. Recent research shows much interest in using MIMO for cognitive radio systems. Introducing MIMO system will bring spatial diversity at both transmitter and receiver and achieves diversity gain to improve the error performance and transmits multiple copies of data independently to improve the capacity. Lots of studies are carried out in employing MIMO system in the CR network to improve the detection performance. In [6]-[10], the authors

analyzed the performance of SU equipped with multiple antennas to sense the PU signal. Authors in [11]-[13] analyzed spectrum sensing by deploying centralized MIMO system for reporting. In [11], [12] local decision made by SU is reported to the FC and decision fusion is performed by FC to make the final decision wherein [13] soft data fusion is performed.

The IEEE 802.22 standard is aimed at using cognitive radio techniques to utilize the unused television broadcast service spectrum to get broadband access in the rural and remote areas. The spectrum sensing techniques and performance analysis of different sensing schemes for IEEE 802.22 WRAN standard over fading channels is discussed in [14]-[18]. For fixed Broadband Wireless Access (BWA) applications, multiple antenna technologies have significant benefits [6], [19]. Thus the use of cooperative MIMO system can meet a considerable increase in the performance WRAN system [15], [16], [20], [21].

The FC combines the signal received from different SU's using conventional diversity combining schemes like Equal Gain Combining (EGC), Maximum Ratio Combining (MRC) and optimal soft combining [5] and performs energy detection (ED) which is simple and low complex. The ED does not require any information about the PU signal. The statistical and the performance analysis of ED over multipath fading channels are discussed in [22], [23]. In [12], the authors proposed cooperating spectrum sensing and a realistic reporting channel with the MMSE detector at FC to perform decision fusion. In [24], [25] the authors studied transceiver design techniques with MMSE and ZF equalizer to improve the data rate for CR system.

In this paper, we consider a cooperative MU-MIMO based reporting system for IEEE802.22 standard where the PU signal is DVB-T data. We assume the sensing channel as Additive white Gaussian channel and IID Rayleigh reporting channel. The SU forwards the sensed DVB-T signal to the FC on a Time division multiple access basis and the FC performs equalization to minimize the effects due to channel uncertainties and estimates the actual transmitted data by means of Minimum Mean Square Error (MMSE) and Zero forcing (ZF) equalizers to improve the detection performance reasonably over the spectrum of interest. To make the decision on the presence of DVB-T signal FC performs energy detection. We derive a closed form expression for the average detection probability of FC over IID Rayleigh for multiple SU with MMSE and ZF equalizer. Finally, we analyze the detection performance of various multiple antenna scenarios. The rest of this paper as follows: Section II discusses about the proposed system model. Section III evaluates the average

S.Hariharan is with Electronics and Communication Engineering Department, National Institute of Technology, Tiruchirappalli - 620015, India (e-mail: 408110004@nitt.edu).

P. Muthuchidambaranathan is with Electronics and Communication Engineering Department, National Institute of Technology, Tiruchirappalli - 620015, India (e-mail: muthuc@nitt.edu).

detection probabilities of FC over IID Rayleigh for MMSE and ZF. While Section IV outlines the simulation results, Section V concludes the paper.

## II. SYSTEM MODEL

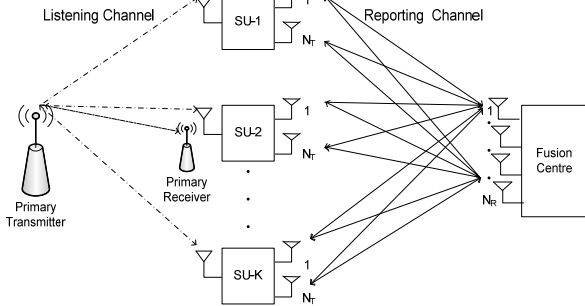


Fig. 1 Cooperative - MIMO reporting system

We consider a CR network of single primary user,  $K$  secondary user with single antenna to sense the primary user signal and  $N_T$  transmitting antenna to report to the FC and a FC with  $N_R$  receiving antenna and equipped with Linear equalizer and energy detector as shown in the Fig. 1. The sensing channel is assumed to be an AWGN for analysis and the reporting channel experiencing IID Rayleigh fading. The signal received at  $K^{th}$  SU is given by,

$$R_k^{(n)} = \begin{cases} w_k^{(n)} & ; \mathcal{H}_0 \\ s_k^{(n)} + w_k^{(n)} & ; \mathcal{H}_1 \end{cases} \quad (1)$$

where  $s_k^{(n)} \sim \mathcal{N}(0,1)$  is  $n^{th}$  PU sample received at  $K^{th}$  SU,  $w_k^{(n)} \sim \mathcal{N}(0,1)$  is the noise signal and both assumed to be circularly symmetrical complex random variable,  $1 \leq k \leq K$  and  $1 \leq n \leq N$ .

The signal received at the FC is given by,

$$R_{fc} = \begin{cases} \sum_{k=1}^K \sum_{n=1}^N W_k^{(n)} & ; \mathcal{H}_0 \\ \sum_{k=1}^K \sum_{n=1}^N H_k^{(n)} \bar{R}_k^{(n)} + W_k^{(n)} & ; \mathcal{H}_1 \end{cases} \quad (2)$$

where  $R_{fc}$  is  $[N_R \times N]$ ;  $W_k^{(n)}$  is  $[N_R \times N]$ ;  $\bar{R}_k^{(n)}$  is  $[N_R \times 1]$  and  $H_k^{(n)}$  is  $[N_R \times N_T]$  vectors respectively from  $K^{th}$  SU.

The FC performs energy detection and the output of the detector when  $H_k^{(n)}$  is an AWGN channel is given by,

$$Y = \sum_{i=1}^{N_R} \sum_{n=1}^{N_T} |R_{fc}(i,j)|^2 \quad (3)$$

where  $Y$  is the observed energy value at FC. The sum of squares of  $N$  Gaussian random variable with zero mean and unit variance follows a central chi-square ( $\chi^2$ ) distribution with  $2N$  degrees of freedom under  $\mathcal{H}_0$  and noncentral ( $\chi^2$ )

distribution with  $2N$  degrees of freedom and  $2N\gamma$  non centrality parameter under  $\mathcal{H}_1$ . Adding  $L$  IID noncentral ( $\chi^2$ ) variable with  $2N$  degrees of freedom and non-centrality parameter  $2N\gamma$  will result in another noncentral ( $\chi^2$ ) variable with  $2NL$  degrees of freedom and non-centrality parameter  $2NL\gamma$ . Where  $\gamma$  is the instantaneous SNR [22], [23], [26] and  $L = N_R \times N_T$  is the number of diversity branches. If  $K$  independent SU with  $N_T$  transmitting antenna and the FC with  $N_R$  antennas, then the total diversity paths will be  $K \times N_T \times N_R$  [27], [28] therefore the degrees of freedom and non centrality parameter of the central and noncentral ( $\chi^2$ ) variable will be given as  $2NKL$  and  $2NKL\gamma$  respectively. The Probability Density Function (pdf) of  $Y$  can be written as,

$$f_Y(y) = \begin{cases} \left(\frac{1}{2}\right)^{(NKL)} \frac{y^{NKL-1} e^{-\frac{y}{2}}}{\Gamma(NKL)} & ; \mathcal{H}_0 \\ \left(\frac{y}{2NKL\gamma}\right)^{\frac{NKL-1}{2}} \frac{e^{-\frac{y+2NKL\gamma}{2}} I_{NKL-1}(\sqrt{2NKL\gamma y})}{\Gamma(NKL)} & ; \mathcal{H}_1 \end{cases} \quad (4)$$

where  $\Gamma(\cdot)$  is gamma function and  $I_{(v)}$  is the  $v^{th}$  order modified Bessel function of the first kind [22], [23], [29]. The probability of detection ( $P_d$ ) and probability of false alarm ( $P_f$ ) at the FC is given by [2], [5], [22], [23], [28]

$$P_d = \Pr(Y > (\lambda | \mathcal{H}_1)) = Q_{NKL}(\sqrt{2NKL\gamma}, \sqrt{\lambda}) \quad (5)$$

$$P_f = \Pr(Y > (\lambda | \mathcal{H}_0)) = \frac{\Gamma(NKL, \frac{\lambda}{2})}{\Gamma(NKL)} \quad (6)$$

where  $\lambda$  is the decision threshold,  $\Gamma(\cdot, \cdot)$  denotes the incomplete gamma function and  $Q_m(a, b)$  is the generalized Marcum Q-function.

### A. Average Detection Probability analysis of ZF Equalizer

The FC estimates the signal from  $K^{th}$  SU using the weight matrix of ZF and is given by,

$$W_{zf} = [H_k^{(n)}]^\dagger \quad (7)$$

where  $[H]^\dagger = (H^H H)^{-1} H$  is the pseudo inverse of the matrix  $H$  [27]. The estimated PU data at FC is given by,

$$\hat{R}_{k,zf}^{(n)} = [R_{fc}]_k^{(n)} W_{zf} \quad (8)$$

The output of the energy detector under  $\mathcal{H}_1$  is given by,

$$Y_{zf} = \sum_{k=1}^K \sum_{n=1}^N \|\hat{R}_{k,zf}^{(n)}\|^2 \quad (9)$$

The  $P_d$  of the FC with ZF is obtained as in (5) over an AWGN channel is given by,

$$P_{d,zf} = \Pr(Y > (\lambda | \mathcal{H}_1)) = Q_{NKL}(\sqrt{2NKL\gamma_{zf}}, \sqrt{\lambda}) \quad (10)$$

where  $\gamma_{zf}$  is the instantaneous SNR of the ZF equalizer.

To obtain a closed form expression of an average detection probability the conditional  $P_d$  over the AWGN channel is convolved with the output SNR distribution. The  $P_f$  of (6) will be the same for any fading channel condition as it is considered noise only criteria and independent of SNR. The pdf of output SNR  $\gamma_{zf}$  of the ZF equalizer over IID Rayleigh with  $K$  SU's is given by [30],

$$f(\gamma_{zf}) = \frac{KN_T}{\bar{\gamma}(N_R - KN_T)!} \left( \frac{\gamma_{zf} KN_T}{\bar{\gamma}} \right)^{N_R - KN_T} \left[ e^{-\frac{\gamma_{zf} KN_T}{\bar{\gamma}}} \right] \quad (11)$$

where  $\bar{\gamma}$  is the average SNR of each diversity branch. The average detection probability at FC can be obtained by,

$$\overline{P_{d,zf}} = \frac{(N_R - KN_T)!}{\left( \frac{KN_T}{\bar{\gamma}} \right)^{N_R - KN_T + 1}} \times \left\{ G_{M-1} + \frac{\Gamma(\xi) \left( \frac{\lambda}{2} \right)^{M-1} \exp\left(-\frac{\lambda}{2}\right)}{2(M-1)! \left( \frac{K(N_T + NL\bar{\gamma})}{\bar{\gamma}} \right)^\xi} \times {}_1F_1\left(\xi; M; \frac{\lambda NL\bar{\gamma}}{2(N_T + NL\bar{\gamma})}\right) \right\}, N_T \leq N_R \quad (13)$$

### B. Average Detection Probability analysis of MMSE Equalizer

In the case of MMSE, the weight matrix is given by

$$\mathbf{W}_{mmse} = \left[ [\mathbf{H}_k^{(n)}]^H [\mathbf{H}_k^{(n)}] + I_{N_R} \sigma_W^2 \right]^{-1} [\mathbf{H}_k^{(n)}]^H \quad (14)$$

where  $I_{N_R}$  identity matrix,  $\sigma_W^2$  is the noise variance,  $[\mathbf{H}]^H$  is Hermitian transpose of matrix the  $\mathbf{H}$ . The estimated PU data at FC is given by

$$\hat{R}_{k,mmse}^{(n)} = [R_{fc}]_k^{(n)} \mathbf{W}_{mmse} \quad (15)$$

The output of the energy detector under  $\mathcal{H}_1$  is given by,

$$Y_{mmse} = \sum_{k=1}^K \sum_{n=1}^N \left\| \hat{R}_{k,mmse}^{(n)} \right\|^2 \quad (16)$$

The  $P_d$  of the FC with MMSE is obtained as in (5) over an AWGN channel is given by,

$$P_{d,mmse} = \Pr(Y > (\lambda|\mathcal{H}_1)) = Q_{NKL}(\sqrt{2NKL\gamma_{mmse}}, \sqrt{\lambda}) \quad (17)$$

$$\overline{P_{d,mmse}} = \int_0^\infty N_R \binom{N_T + K - 1}{N_R} \left( \frac{q^{N_R}}{1 + q\gamma_{mmse}} \right)^{N_T + K} (\gamma_{mmse})^{N_R - 1} |C|^{-N_R} \times {}_1F_0(N_T + K; T, S) Q_{NKL}(\sqrt{2NKL\gamma_{mmse}}, \sqrt{\lambda}) d\gamma_{mmse} \quad (23)$$

### III. RESULTS AND DISCUSSION

The DVB-T signal of bandwidth 8 MHz operating in 2K mode with QPSK modulation and a code rate of 1/16 is considered. The sensing channel is assumed as AWGN and the reporting channel experiences a Rayleigh fading. The Threshold is obtained from (6) to meet the given false alarm probability of 0.01. The number of Monte Carlo realizations used for calculating the probability of detection is 1000.

We consider the study of performance of different multiple antenna scenario for reporting, In Figs. 2 and 3 we analyzed

$$\overline{P_{d,zf}} = \int_0^\infty f(\gamma_{zf}) Q_{NKL}(\sqrt{2NKL\gamma_{zf}}, \sqrt{\lambda}) d\gamma_{zf} \quad (12)$$

The integration in (12) can be solved by using [31, eqn. 29] while making the change of variable,  $M = NKL$ ,  $x = \sqrt{\gamma_{zf}}$ ,  $\frac{p^2}{2} = \frac{KN_T}{\bar{\gamma}}$ ,  $\rho = 2(N_R - KN_T)$ ,  $a = \sqrt{2NKL}$  and  $b = \sqrt{\lambda}$ . Finally the average detection probability  $\overline{P_{d,zf}}$  at FC with multiple SU is expressed as in (13), where  $\xi = \frac{2(N_R - KN_T) + 1}{2}$ ,  ${}_1F_1(\cdot; \cdot; \cdot)$  is the confluent hyper geometric function [29], [30], [32]-[34], where  $G_{M-1}$  can be evaluated and obtained as in [23], [29], [31].

The pdf of output SNR  $\gamma_{mmse}$  of the MMSE equalizer over IID Rayleigh with  $K$  SU's is given by [30],

$$f(\gamma_{mmse}) = N_R \binom{N_T + K - 1}{N_R} \left( \frac{q^{N_R}}{1 + q\gamma_{mmse}} \right)^{N_T + K} (\gamma_{mmse})^{N_R - 1} |C|^{-N_R} \times {}_1F_0(N_T + K; T, S) \quad (18)$$

where  $q$  is an arbitrary constant  $q > 0$ ,  ${}_1F_0(\cdot; \cdot; \cdot)$  is the hyper geometric function [29], [32], [33], [34]

$$C = \text{diag} \left( I_{N_T - 1}, \frac{N_T}{\bar{\gamma}K} I_K \right) \quad (19)$$

$$T = (I_{N_T + K - 1} - qC^{-1}) \quad (20)$$

$$S = \text{diag}((1 + q\gamma_{mmse})^{-1}, I_{N_R - 1}) \quad (21)$$

The average detection probability at FC can be obtained by

$$P_{d,mmse} = \int_0^\infty f(\gamma_{mmse}) Q_{NKL}(\sqrt{2NKL\gamma_{mmse}}, \sqrt{\lambda}) d\gamma_{mmse} \quad (22)$$

The average detection probability  $\overline{P_{d,mmse}}$  at FC with multiple SU can be obtained from (23).

the performance of ZF and MMSE equalizers respectively, with a single SU for reporting and the sensing time is 15 ms. The observation shows 1x4 system and the MMSE has better performance and also the number of receiving antenna increased at FC has a better detection probability.

The multiple SU analysis is shown in Figs. 4 and 5 with different multiple antenna scenario and the number of SU considered for analysis is  $K=5$  and sensing time is 15 ms. The observations show MMSE and 1x4 system has better performance similar to single SU case also the MMSE with 1x4 system achieves an interesting detection probability,

according to [35] the minimum requirement for practical implementation of WRAN system the SU have to detect the DVB-T signal at -22.2 dB SNR with detection probability is about 90% and the minimum probability of false alarm is 0.1. In Fig. 4 the detection probability of 98% is achieved about -23 dB. Thus, by employing multiple antenna at FC in a centralized cooperative reporting system we met the minimum requirement to implement WRAN system practically and also the proposed system shows better performance at lower SNR levels using the energy detector.

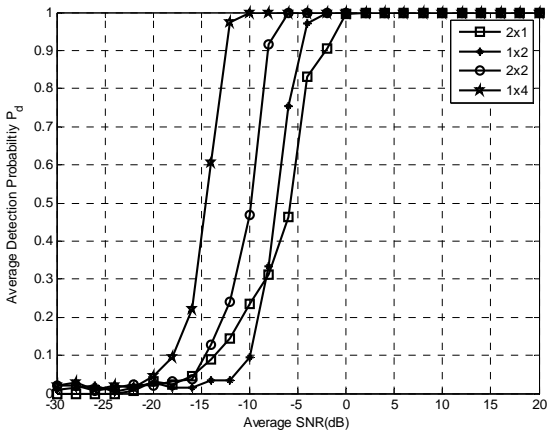


Fig. 2 ZF Single User

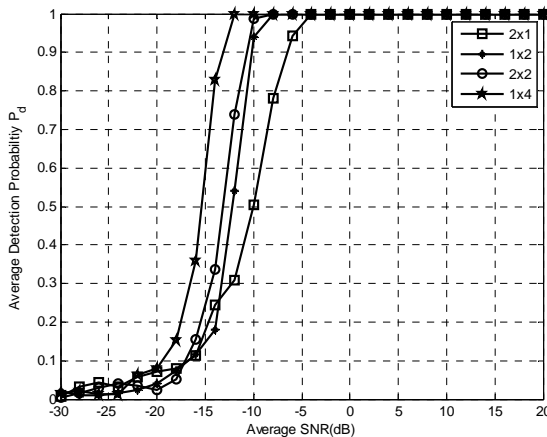


Fig. 3 MMSE Single User

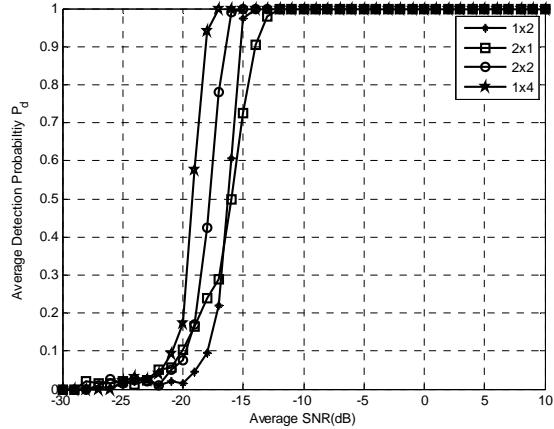


Fig. 4 ZF Multi User

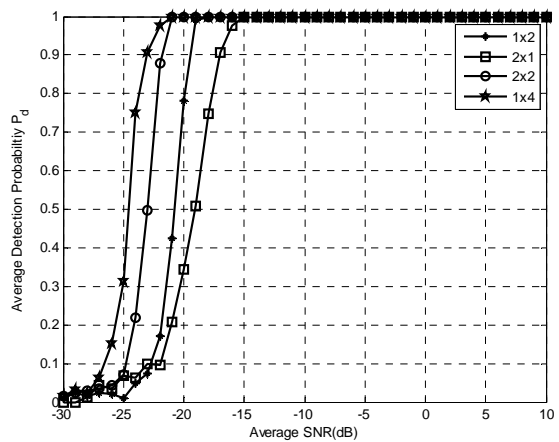


Fig. 5 MMSE Multi User

IV. CONCLUSION

In this paper we have discussed MU-MIMO spectrum sensing based reporting system for detecting DVB-T signal. The SU forwards the received DVB-T signal to the FC and we assume that the reporting channel has no bandwidth limitation and channel state information available at FC. The FC estimates the received PU data with linear equalizers and performs energy detection to make the final decision. The average detection probability of FC with linear equalizer under multiple SU case operating over an IID Rayleigh reporting channel and the AWGN sensing channel is obtained. Finally the performance of the proposed system under different multiple antenna scenario was analyzed through Monte Carlo simulations. As the simulation results met the minimum requirement to implement WRAN system practically, in future the studied system model will be tested on a real time wireless platform.

REFERENCES

[1] S.Haykin, "Cognitive Radio: Brain Empowered Wireless Communication," *IEEE Journal on selected areas in commn*, Vol.23, No.2, pp. 201-220, 2005.

- [2] Akyildiz F. Ian, Brandon F. Lo, and Ravikumar Balakrishnan, "Cooperative spectrum sensing in cognitive radio networks: A survey," *Physical Commns.*, Vol.4, No.1, pp. 40-46, 2011
- [3] Ganesan, G., and Y. (G.) Li., "Cooperative spectrum sensing in cognitive radio-part I: Two user networks," *IEEE Trans. Wireless Commns.*, Vol.6 No.6, pp. 2204-2213, 2007.
- [4] Ganesan, G., and Y. (G.) Li., "Cooperative spectrum sensing in cognitive radio-part II: Multiuser networks," *IEEE Trans. Wireless Commns.*, Vol.6 No.6, pp. 2214-2222, 2007
- [5] Jun Ma, Zhao, G., and Y. Li., "Soft Combination and Detection for cooperative Spectrum Sensing in Cognitive Radio Networks," *IEEE Trans. on wireless commns.*, Vol.7 No.4, pp. 4502-4507, 2008.
- [6] Mietzner, J., Schober, R., Lampe, L., Gerstacker, W.H., Hoehner, P.A., "Multiple-antenna techniques for wireless communications - a comprehensive literature survey," *IEEE Communications Surveys and Tutorials*, Vol.11, No.2, pp. 87-105, 2009.
- [7] Pu Wang, Jun Fang, Ning Han, Hongbin Li, "Multiantenna Assisted Spectrum Sensing for Cognitive Radio," *IEEE Trans. on Vehicular Technology*, Vol.59, No.4, pp. 1791-1800, 2010.
- [8] Taherpour, A., Nasiri-Kenari, M., Gazor, S., "Multiple antenna spectrum sensing in cognitive radios," *IEEE Trans. on Wireless Commns.*, Vol.9, No.2, pp. 814-823, 2010.
- [9] Rui Zhang, Teng Joon Lim, Ying Chang Liang, Yonghong Zeng, "Multi-antenna based spectrum sensing for cognitive radios: A GLRT approach," *IEEE Trans. on Commns.*, Vol.58, No.1, pp. 84-88, 2010.
- [10] Rui Zhang, Ying Chang Liang, "Exploiting Multi-Antennas for Opportunistic Spectrum Sharing in Cognitive Radio Networks," *IEEE Journal of Selected Topics in Signal Processing*, Vol.2 No.1, pp. 88-102, 2008.
- [11] Singh, A., Bhatnagar, M.R., Mallik, R.K., "Cooperative Spectrum Sensing in Multiple Antenna Based Cognitive Radio Network Using an Improved Energy Detector," *IEEE Communications Letters*, Vol.16 No.1, pp. 64-67, 2012.
- [12] Liza, J., Muthumeenakshi, K., Radha, S., "Cooperative Spectrum Sensing in a Realistic Cognitive Radio Environment," *International Conference on Recent Trends in Information Technology (ICRITIT)*, pp.375-379, 2011.
- [13] Hariharan, S., Venkata Siva Prasad, S., Muthuchidambaranathan, P., "Average detection probability analysis for cooperative-MIMO spectrum sensing in cognitive radio networks," *International Conference on Advances in Computing, Communications and Informatics (ICACCI)*, pp. 133-136, 2013.
- [14] Daniel Riviello, Roberto Garello, Sergio Benco, Floriana Crespi and Alberto Perotti, "Sensing of DVB-T Signals for White Space Cognitive Radio Systems," *The Third International Conference on Advances in Cognitive Radio*, pp. 12-17, 2013
- [15] Danev, D., "On signal detection techniques for the DVB-T standard," *International Symposium on Communications, Control and Signal Processing (ISCCSP)*, pp. 1-5, 2010.
- [16] Lei Chen, Qihang Peng, Jun Wang and Shaoqian Li, "Sensing schemes for DVB-T in cognitive radio context," *International Conference on Communications, Circuits and Systems*, pp. 314-318, 2007.
- [17] Danev, D., Axell, E., Larsson, E.G., "Spectrum sensing methods for detection of DVB-T signals in AWGN and fading channels", *International Symposium on Personal Indoor and Mobile Radio Communications (PIMRC)*, pp. 2721-2726, 2010.
- [18] Sunmin Lim, Hoiyoon Jung, Myung Sun Song, "Cooperative Spectrum Sensing for IEEE 802.22 WRAN System," *Proc. of International Conference on Computer Communications and Networks*, pp. 1-5, 2009.
- [19] Jian Li and Petre, *MIMO Radar Signal Processing*, John Wiley and Sons, 2009.
- [20] Saeed, R.A., Mokhtar, R.A., "TV white spaces spectrum sensing Recent developments, opportunities and challenges," *International Conference on Sciences of Electronics, Technologies of Information and Telecommunications (SETIT)*, pp. 21-24, 2012.
- [21] Hongjian Sun, Nallanathan, A., Jing Jiang, Cheng-Xiang Wang, "Cooperative spectrum sensing with diversity reception in cognitive radios," *International Conference on Communications and Networking in China (CHINACOM)*, pp.216-220, 2011.
- [22] Urkowitz, Harry. "Energy detection of unknown deterministic signals," *Proceedings of the IEEE.*, Vol.55, No.4, pp. 523-531, 1967.
- [23] F.F.Digham, M.S Alouini and M.K.Simon, "On the Energy Detection of Unknown signals Over fading Channels," *IEEE Trans. on Commns.*, Vol. 55, No. 1, pp 21-25, 2007.
- [24] Keonkook Lee, Chan-Byoung Chae, Joonhyuk Kang, Tae-Kyung Sung, "MMSE receiver spatial sensing technique for cognitive radio networks," *International Symposium on Communications and Information Technologies (ISCIT)*, pp.377-381, 2012.
- [25] Keonkook Lee, Chan-Byoung Chae, Heath, R.W., Joonhyuk Kang, "MIMO Transceiver Designs for Spatial Sensing in Cognitive Radio Networks," *IEEE Trans. on Wireless Commns.*, vol.10, No.11, pp. 3570-3576, 2011.
- [26] Papoulis, A., and Unnikrishna Pillai, S., *Probability, Random variables and Stochastic Process*, 4th Ed., New work, McGraw-Hill, 2002.
- [27] Yong Soo Cho, Jaekwon Kim, Won Young Yang and Chung G. Kang., *MIMO-OFDM wireless communications with MATLAB*, John Wiley and Sons, 2010, Ch. 13.
- [28] Daniel W. Bliss, Siddhantan Govindasamy, *Adaptive Wireless Communications: MIMO Channels and Networks*, Cambridge Press, 2013, Ch. 16.
- [29] Gradshteyn, I.S. and Ryzhik, I.M., *Table of Integrals, Series and Products*, 6th ed., CA: Academic San Diego, 2000.
- [30] Honig, Michael L. *Advances in Multiuser Detection*, Hoboken, NJ: Wiley, 2009, Ch. 6.
- [31] Nuttall, A.H., "Some Integrals Involving the QM function," *IEEE trans. on Information Theory*, vol.21, No.1, pp. 95-96, 1975.
- [32] Morales-Jimenez, D.; Lopez-Martinez, F.J.; Martos-Naya, E.; Paris, J.F.; Lozano, A., "Connections Between the Generalized Marcum Q-Function and a Class of Hypergeometric Functions," *Information Theory, IEEE Transactions on*, vol.60, No.2, pp.1077-1082, 2014.
- [33] Bateman, Harry. *Tables of Integral Transforms*. New York, NY: McGraw-Hill, 1954. N. pag. Print
- [34] Milton Abramowitz and Irene A. Stegun, *Hand book of mathematical functions with formulas, graphs, and Mathematical Tables*. 1964.
- [35] Shellhammer, S. and Chouinard, G., Spectrum sensing requirements summary, *IEEE Std.802.22-06/0089r4*, 2006. [http://www.ieee802.org/22/Meetingdocuments/2006\\_July/22-06-0089-04-0000-SpectrumSensing-Requirements-Summary.doc](http://www.ieee802.org/22/Meetingdocuments/2006_July/22-06-0089-04-0000-SpectrumSensing-Requirements-Summary.doc).

**S. Hariharan** received his B.Eng. Degree in Electronics and Communication Engineering from Periyar University, Salem, Tamilnadu, India, in 2004, and the M.Eng. Degree in Communication Systems from Anna University, Chennai, India, in 2006. Currently he is pursuing his Ph.D. in Wireless Communication Networks in the Department of Electronics and Communication Engineering, National Institute of Technology (NIT), Tiruchirappalli, India. He is a recipient of Canadian Commonwealth Scholarship Award-2011 for Graduate Student Exchange Program in the Department of Electrical and Computer Engineering, University of Saskatchewan, Saskatoon, SK, Canada. His research interests include cooperative spectrum sensing, statistical signal processing, orthogonal frequency division multiplexing (OFDM), multiple-input and multiple-output (MIMO) systems and vector quantization.

**P. Muthuchidambaranathan** received his B.Eng. Degree in Electronics and Communication Engineering from Government College of Technology, Coimbatore, India, in 1992, the M.Eng. Degree in Microwave and Optical Engineering, from A.C. College of Engineering and Technology, Karaikudi, India, in 1994. He obtained his Ph.D. degree in optical communication from the National Institute of Technology (NIT), Tiruchirappalli, India in 2009. He is currently working as an Associate Professor in the Department of Electronics and Communication Engineering, National Institute of Technology (NIT), Tiruchirappalli, India. His research interests include wireless communications, and optical communications. He published his research papers in refereed international journals, and international and national conferences. He is an author of the textbook "Wireless Communications" (published by Prentice Hall of India).