

# Study and Evaluation of Added Stresses under Foundation due to Adjacent Structure

Alireza M. goltabar, Issa shooshpasha ,Reza Shamstabar kami , Mostafa Habibi

**Abstract**—Added stresses due to adjacent structure should be considered in foundation design and stress control in soil under the structure. This case is considered less than other cases in design and calculation whereas stresses in implementation are greater than analytical stress.

Structure load are transmitted to earth by foundation and role of foundation is propagation of load on the continuous and half extreme soil. This act cause that, present stresses lessen to allowable strength of soil. Some researchers such as Boussinesq and westergaurd by using of some assumption studied on this issue, theoretically. Target of this paper is study and evaluation of added stresses under structure due to adjacent structure. For this purpose, by using of assumption, theoretic relation and numeral methods, effects of adjacent structure with 4 to 10 storeys on the main structure with 4 storeys are studied and effect of parameters and sensitivity of them are evaluated.

**Keywords**— stress, soil, adjacent structure, foundation, loading.

## I. INTRODUCTION

**L**OAD of structure are transmitted to earth by foundation and role of foundation is propagation of load. So we should consider that foundation of structure should be able to transfer structure load. Also soil under the structure should bear these loads. With economic development and increasing of population and for optimum using of land, foundation of structures are constructed in adjacent of together and this issue is one of the problems of designers.

Combination of stress under adjacent structure can increase stresses of soil. This stress can be greater than bearing capacity of soil. Realism determination of this stress is important in two points: 1-construction of structure in near of main structure cause that stresses are increased and this stress should be less than allowable strength of soil. 2- If clay layers are exist in depth of soil, because of little seepage of it, immediate settlement of soil is small but consolidation settlement can be big. This settlement can cause Ununiform settlement that this is destroyer for structure [1],[2].

Alireza M. goltabar is with Civil engineering Department, Babol Noshirvani University of technology, Iran, (corresponding author to provide phone: 98-111-3234701; fax: 98-111-3234701; e-mail: alirezagoltabar@yahoo.com).

Issa shooshpasha is with Civil engineering Department, Babol Noshirvani University of technology, Iran, (e-mail: rezashamstabar@yahoo.com).

Reza Shamstabar kami is with Civil engineering Department, Babol Noshirvani University of technology, Iran, (e-mail: rezashamstabar@yahoo.com).

Mostafa habibi is with Civil engineering Department, Babol Noshirvani University of technology, Iran.

In this research, for modeling of uniform load, mat foundation is considered for structures. So assumption structures are 4 to 10 storeys. In calculation of vertical stress we can use from Boussinesq and westergaurd relations.

## II. THEORIC SOLUTION AND DETERMINATION OF DISPLACEMENTS AND STRESSES

Neuber-papkovich function is expression of combination of harmonic function for displacement vector ( $\vec{u}$ ) and is in following form:

$$2G\vec{u} = \vec{A} - \vec{\nabla} \left[ B + \frac{\vec{A} \cdot \vec{X}}{4(1-\nu)} \right] \quad (1)$$

That  $\vec{X}$  is a vector with  $x_3, x_2, x_1$  term and  $\vec{A}$ ,  $B$  and  $\nu$  are vector term, numeral term and poisson ratio coefficient, respectively. With replacement of it in equilibrium relation with differential equation (eq. 2) relative to Navier equation, equation (3) is obtained:

$$(\lambda + \mu)grad(div\vec{u}) + \mu Lapl\vec{u} = 0 \quad (2)$$

$$G\nabla^2 \vec{A} - (\lambda + 2G)\vec{\nabla}(\nabla^2 B) - \left( \frac{\lambda + G}{2} \right) \vec{\nabla}(\vec{X} \cdot \nabla^2 \vec{A}) = 0 \quad (3)$$

This relation is satiated if:

$$\begin{cases} \nabla^2 \vec{A} = 0 \\ \nabla^2 B = 0 \end{cases} \quad (4)$$

So, for four harmonic arbitrary function  $A_1, A_2, A_3$  and  $B$ , when displacement vector ( $\vec{u}$ ) are obtained from equation (1), results satiate Navier equation.  $\vec{A}$  and  $B$  functions can be obtained from Galerkin vector ( $\vec{V}$ ) in following form:

$$\begin{aligned} \vec{A} &= 2(1-\nu)\nabla^2 \vec{V} \\ B &= \vec{\nabla} \cdot \vec{V} - \frac{\vec{A} \cdot \vec{X}}{4(1-\nu)} \end{aligned} \quad (5)$$

Top form in one of the special forms of  $\vec{A}$  and  $B$  in axial symmetry problems, so we have:

$$A_z = A_z(r, z) \quad \text{and} \quad A_r = A_\theta = 0 \quad (6)$$

$$B = B(r, z) \quad (7)$$

One of the applications of these problems is in Boussinesq problem. In 1883, Boussinesq calculated stresses of soil due to point load on the ground. We assume that load is a point and intensive load and considered area is half extreme, homogeneous, elastic and isotropic. This load are presented in fig.(1). Location of P is on the ground surface and in a half extreme area.

If Neuber-papkovich function is considered in following form:

$$A_z = 4(1-\nu)\frac{K}{\rho} \tag{8}$$

$$A_r = A_\theta = 0 \tag{9}$$

$$B = CLn(\rho+z) \tag{10}$$

This function satiate equation (3) and Navier relation. If equations (7) and (8) are replaced in equation (1), we have:

$$\vec{u} = \frac{4(1-\nu)K}{2G\rho} \vec{k} - \frac{\vec{\nabla}}{2G} \left[ CLn(\rho+z) + \frac{Kz}{\rho} \right] \tag{11}$$

That  $\vec{k}$  is the univalent vector in z axial. In cylindrical coordinate, eq.(10) can be written in following form:

$$u_r = -\frac{Cr}{2G\rho(\rho+z)} + \frac{Kzr}{2G\rho^3} \tag{12}$$

$$u_\theta = 0$$

$$(12)$$

$$u_z = -\frac{(3-4\nu)K-C}{2G\rho} + \frac{Kz^2}{2G\rho^3} \tag{13}$$

Limit conditions of problem are: in all points on top of the half extreme area  $\sigma_{rz} = 0$  and for all point expected to era of coordinate  $\sigma_{zz} = 0$ . From relation between strain-displacement and stress-strain, we have:

$$\sigma_{rz} = \frac{r}{\rho^3} \left[ C - K(1-2\nu) - \frac{3Kz^2}{\rho^2} \right] \tag{14}$$

That from first limit condition, we can obtain relation between C and K:

$$C = K(1-2\nu) \tag{15}$$

And respectively we have:

$$\sigma_{zz} = -\frac{3Kz^3}{\rho^5} \tag{16}$$

That value of it is indefinite and zero in coordinate era and  $\infty$ . In result we have:

$$K = \frac{P}{2\pi} \tag{17}$$

That Z and L are depth of point and distance from point to load. Vertical stress relation that is assumed by Boussinesq isn't dependent to poisson ratio, unlike horizontal stress in x and y direction.




Fig.1 schematic view of point load

In 1938, westergaurd presented solution for determination vertical stress due to point load in elastic area with several

layer (in interface of layers there is a rigid surface). This assumption is true for clay layers that have sand in interface of it. For such model, vertical stress due to point load in depth (z) is[5]:

$$\Delta p_z = \frac{P\eta}{2\pi^2 z^2} \left[ \frac{1}{\eta^2 + (r/z)^2} \right]^{3/2} \tag{17}$$

That:

$$\eta = \sqrt{\frac{1-2\mu}{2-2\mu}}$$

And  $\mu$  is poisson ratio of layer soil.

In this paper, we use Boussinesq relation, because it shows greater value than westergaurd relation. For calculation of added stress due to new structure, that load of it is uniform, it is proper that we use from integral.

### III. STUDY OF STRESS IN TWO ADJACENT STRUCTURES

Since forces are exerted on the foundation from column centralizes and it transmits to soil by foundation. Foundations extend loads to under layer and we can consider it uniform. So for determination of stress in arbitrary point such as A, we can integral on the effected area by using of Boussinesq vertical stress. With using integral from stress equation for point in the edge of a rectangular area under uniform load, fig.2, we have:

$$\Delta p = \int dp = \int_{y=0}^{by} \int_{x=0}^{bx} \frac{3pz^3}{(2\pi)(x^2 + y^2 + z^2)^{5/2}} dx dy = PI_{mn} \tag{18}$$

That:

$$I_{mn} = \frac{1}{4\pi} \left[ \frac{2mn\sqrt{m^2+n^2+1}}{m^2+n^2+m^2n^2+1} \left( \frac{m^2+n^2+2}{m^2+n^2+1} \right) + \tan^{-1} \left( \frac{2mn\sqrt{m^2+n^2+1}}{m^2+n^2-m^2n^2+1} \right) \right]$$

and  $m = \frac{B}{z}$ ,  $n = \frac{L}{z}$

Top relation isn't true for all values but it is proper for some of the values that on basis of m and n, values of  $I_{mn}$  are obtained. It should be mentioned that m and n are allowable only for edge of foundation, so for other points such as central point (that has major calculations) we should use superposition method. Fig.3 shows schematic plan of main structure and adjacent structure position and shows points that are studied in the tables and graphs.




Fig. 2 Dimension of assumed area

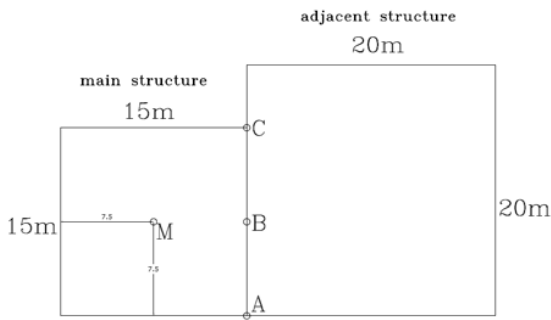


Fig.3- schematic plan adjacent structures

With attention to low allowable strength of soil, ordinary foundation of 4 storeys structure are mat, that has better condition with Boussinesq method rather other methods. Properties of structure are assumed in following: main structure, that stress of it is considered, is 4 storeys structure with  $15 \times 15m^2$  area and weigh of each storey is 0.9 tons per square meter. Also adjacent structure is 4 to 10 storeys with  $20 \times 20m^2$  area. In these structures, distribution of load is assumed uniform, because foundations are mat and storey weight of adjacent structure are like to main structure. Information of structures are shown in table (1).

TABLE I INFORMATION OF MAIN AND ADJACENT STRUCTURES

Dimension of structure (m <sup>2</sup> )	Main structure	Adjacent structure							
	15*15	20*20							
Number of storey	4	4	5	6	7	8	9	10	
Weight of each storey (t/m <sup>2</sup> )	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	
Weight of total storey (t)	202.5	360	360	360	360	360	360	360	
Weight of all structure (t)	1012.5	1800	2160	2520	2880	3240	3600	3960	
Stress in bottom of foundation (t/m <sup>2</sup> )	4.5	4.5	5.4	6.3	7.2	8.1	9	10	

IV. NUMERAL CALCULATION AND STUDY OF RESULTS

For study of increase of stress in main structure, calculation are performed in four points A, B, C and M that calculation of point A is shown in table(2) and (3). In continue, for study of effect of storeys on added stress, stresses are shown for all adjacent structure and for all number storey in one graph that is shown in Fig. (4).

As it is shown in table (2), we can use from sum of the two structures.

In this table I1(mm) and I2(mm) are related to main structure and adjacent structure that are calculated for various depth.

TABLE II CALCULATION OF I FOR OBTAIN OF ADDED STRESS IN POINT A AND IN VARIOUS DEPTH

Z(m)	m=15/Z	n=15/Z	I <sub>1</sub> (mm)	m=20/Z	n=20/Z	I <sub>2</sub> (mm)
1	15.0000	15.0000	0.2499	20.0000	20.0000	0.2500
2	7.5000	7.5000	0.2496	10.0000	10.0000	0.2498
3	5.0000	5.0000	0.2486	6.6667	6.6667	0.2494
4	3.7500	3.7500	0.2467	5.0000	5.0000	0.2486
5	3.0000	3.0000	0.2439	4.0000	4.0000	0.2473
6	2.5000	2.5000	0.2401	3.3333	3.3333	0.2455
7	2.1429	2.1429	0.2352	2.8571	2.8571	0.2455
8	1.8750	1.8750	0.2295	2.5000	2.5000	0.2431
9	1.6667	1.6667	0.2229	2.2222	2.2222	0.2401
10	1.5000	1.5000	0.2157	2.0000	2.0000	0.2366
11	1.3636	1.3636	0.2080	1.8182	1.8182	0.2325
12	1.2500	1.2500	0.1999	1.6667	1.6667	0.2279
13	1.1538	1.1538	0.1917	1.5385	1.5385	0.2175
14	1.0714	1.0714	0.1834	1.4286	1.4286	0.2119
15	1.0000	1.0000	0.1752	1.3333	1.3333	0.2060
16	0.9375	0.9375	0.1671	1.2500	1.2500	0.1999
17	0.8824	0.8824	0.1592	1.1765	1.1765	0.1938
18	0.8333	0.8333	0.1516	1.1111	1.1111	0.1876
19	0.7895	0.7895	0.1443	1.0526	1.0526	0.1814
20	0.7500	0.7500	0.1372	1.0000	1.0000	0.1752
21	0.7143	0.7143	0.1305	0.9524	0.9524	0.1691
22	0.6818	0.6818	0.1241	0.9091	0.9091	0.1632
23	0.6522	0.6522	0.1181	0.8696	0.8696	0.1573
24	0.6250	0.6250	0.1123	0.8333	0.8333	0.1516
25	0.6000	0.6000	0.1069	0.8000	0.8000	0.1461
26	0.5769	0.5769	0.1018	0.7692	0.7692	0.1407
27	0.5556	0.5556	0.0969	0.7407	0.7407	0.1355
28	0.5357	0.5357	0.0924	0.7143	0.7143	0.1305
29	0.5172	0.5172	0.0881	0.6897	0.6897	0.1257
30	0.5000	0.5000	0.0840	0.6667	0.6667	0.1210
31	0.4839	0.4839	0.0802	0.6452	0.6452	0.1166
32	0.4688	0.4688	0.0766	0.6250	0.6250	0.1123

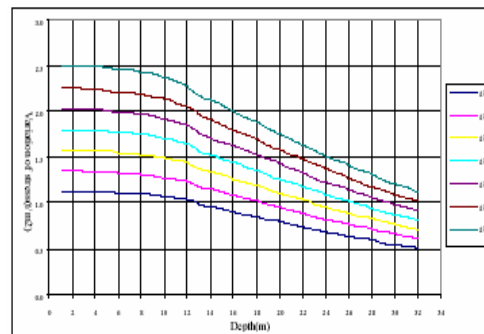


Fig. 4 Comparison of number of storeys on the adjacent structure stress in point A

TABLE III CALCULATION OF STRESS IN POINT A AND IN VARIOUS DEPTHS

Z(m)	POINT A						
	$\Delta P_1(t/m^2)$	$\Delta P_4(t/m^2)$	$\Delta P_5(t/m^2)$	$\Delta P_6(t/m^2)$	$\Delta P_7(t/m^2)$	$\Delta P_8(t/m^2)$	$\Delta P_{10}(t/m^2)$
1	1.1248	2.2496	2.4746	2.6996	2.9246	3.1496	3.3745
2	1.1230	2.2472	2.4720	2.6969	2.9217	3.1465	3.3714
3	1.1186	2.2408	2.4653	2.6897	2.9142	3.1386	3.3630
4	1.1104	2.2289	2.4527	2.6764	2.9001	3.1238	3.3475
5	1.0977	2.2105	2.4331	2.6557	2.8782	3.1008	3.3233
6	1.0804	2.1851	2.4060	2.6269	2.8478	3.0688	3.2897
7	1.0586	2.1632	2.3842	2.6051	2.8260	3.0469	3.2678
8	1.0326	2.1265	2.3452	2.5640	2.7828	3.0015	3.2203
9	1.0030	2.0835	2.2995	2.5156	2.7317	2.9478	3.1639
10	0.9705	2.0350	2.2479	2.4608	2.6737	2.8866	3.0995
11	0.9358	1.9819	2.1911	2.4004	2.6096	2.8188	3.0280
12	0.8997	1.9252	2.1303	2.3354	2.5405	2.7456	2.9507
13	0.8627	1.8416	2.0374	2.2331	2.4289	2.6247	2.8204
14	0.8255	1.7789	1.9696	2.1603	2.3509	2.5416	2.7323
15	0.7885	1.7154	1.9008	2.0862	2.2715	2.4569	2.6423
16	0.7521	1.6518	1.8317	2.0117	2.1916	2.3715	2.5515
17	0.7166	1.5886	1.7630	1.9374	2.1118	2.2862	2.4606
18	0.6822	1.5264	1.6952	1.8640	2.0328	2.2016	2.3705
19	0.6492	1.4654	1.6286	1.7919	1.9551	2.1184	2.2816
20	0.6175	1.4060	1.5637	1.7214	1.8791	2.0368	2.1945
21	0.5873	1.3484	1.5006	1.6528	1.8051	1.9573	2.1095
22	0.5585	1.2927	1.4396	1.5864	1.7333	1.8801	2.0270
23	0.5312	1.2391	1.3807	1.5223	1.6639	1.8055	1.9470
24	0.5054	1.1876	1.3241	1.4605	1.5970	1.7334	1.8699
25	0.4810	1.1383	1.2698	1.4012	1.5327	1.6641	1.7956
26	0.4579	1.0911	1.2177	1.3443	1.4710	1.5976	1.7242
27	0.4362	1.0460	1.1679	1.2899	1.4118	1.5338	1.6558
28	0.4157	1.0029	1.1204	1.2378	1.3553	1.4727	1.5902
29	0.3963	0.9619	1.0750	1.1881	1.3012	1.4143	1.5274
30	0.3781	0.9228	1.0317	1.1407	1.2496	1.3586	1.4675
31	0.3610	0.8856	0.9905	1.0955	1.2004	1.3053	1.4102
32	0.3448	0.8502	0.9513	1.0524	1.1534	1.2545	1.3556

That in this table,  $\Delta P_i$  are:

- $\Delta P_1$ : Stress due to main structure
- $\Delta P_4$ : Stress due to main structure plus stress due to 4 storeys adjacent structure
- $\Delta P_5$ : Stress due to main structure plus stress due to 5 storeys adjacent structure
- $\Delta P_6$ : Stress due to main structure plus stress due to 6 storeys adjacent structure
- $\Delta P_7$ : Stress due to main structure plus stress due to 7 storeys adjacent structure
- $\Delta P_8$ : Stress due to main structure plus stress due to 8 storeys adjacent structure
- $\Delta P_9$ : Stress due to main structure plus stress due to 9 storeys adjacent structure
- $\Delta P_{10}$ : Stress due to main structure plus stress due to 10 storeys adjacent structure

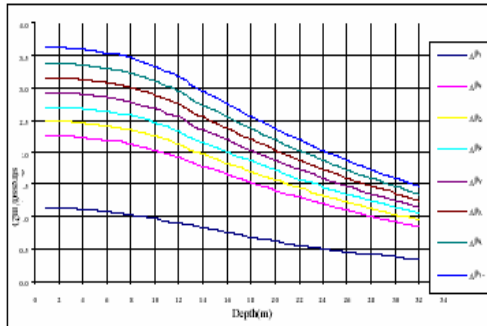


Fig. 5 Comparison of number of storeys on the variation stress of adjacent structure in point A

In Fig.(5), added stresses in point A for various storeye and in various depth are presented. In this Figure  $\Delta P_i$  is added stress due to structure I in point A. For calculation of added stress due to main structure in point M, we can not sue straight method, because this point isn't in edge of uniform load. For this purpose, first area is divided to four section, as Fig.(6), and for each section calculation are performed separated and result are added together.




Fig. 6 manner of structure division for calculation

For calculation of stress due to adjacent structure, we can not use straight method, too. So first it is assumed that uniform load of adjacent structure is on the two area with 7.5\*27.5 (m) and 12.5\*27.5(m) dimension. Then stress due to two area with 7.5\*7.5(m) and 12.5\*7.5(m) are minus to it and real stress are obtained. With attention to performed calculation according to top method, added stress for B, C and M are obtained that its results are shown in Fig. (7) to (9).

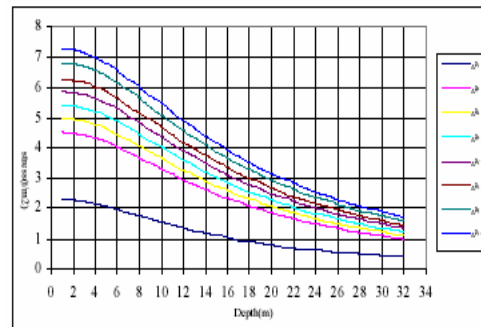


Fig.7 Comparison of number of the storey on the stress in point B

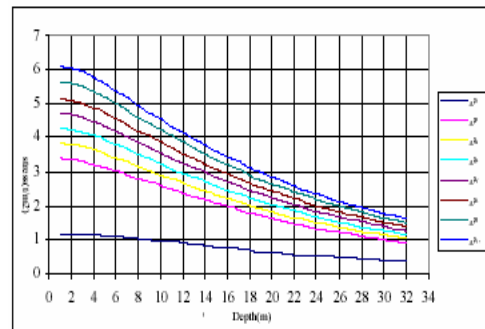


Fig. 8 Comparison of number of the storey on the stress in point C

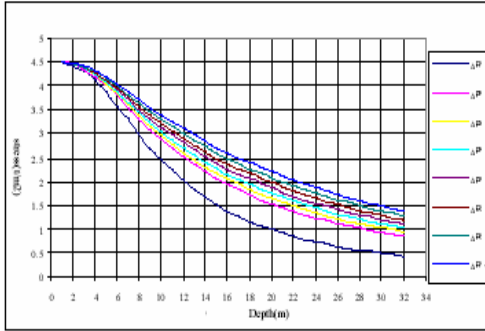


Fig. 9 Comparison of number of the storey on the stress in point M

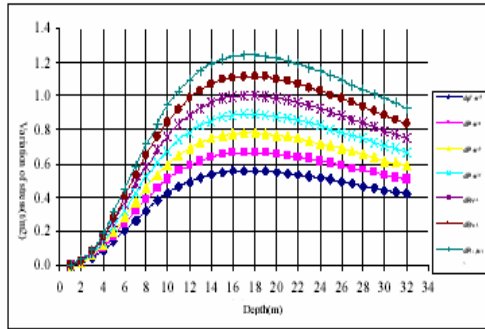


Fig. 10 Comparison of number of the storey on the added stress in point M

In Fig. (10), added stress in point M is shown that n is storey of adjacent structure. For comparison of added stress than main structure stress, it is shown for points A and M in Fig.(11) and (12) .

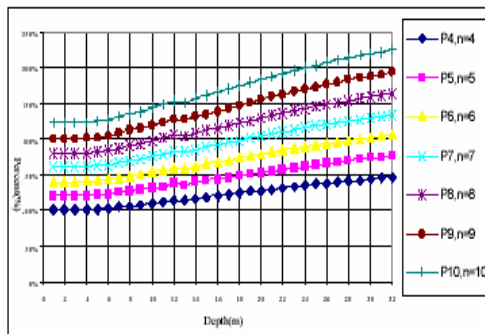


Fig. 11 added stress than main structure stress in point A

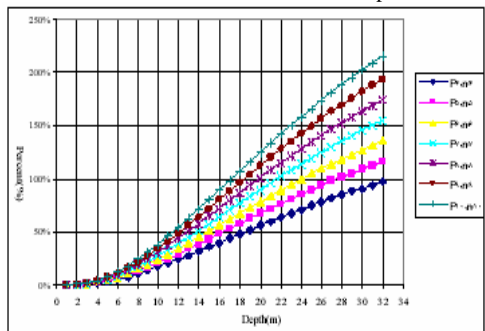


Fig.12 added stress than main structure stress in point M

V. CONCLUSION

According to theoretical calculation and Boussinesq theory in half extreme space and homogenous and isotropic area and with assumption main structure with 4 storeys and adjacent structure with 4 to 10 storeys and study of added stresses in various points of main structure, following result are obtained:

- 1- With increasing of depth, added stress is decreased.
- 2- Added stress due to adjacent structure in main structure with increasing depth has fewer gradients.
- 3- Added stress in center of structure with increasing of depth, increase. But after a definite depth (near 18 m), added stress decrease.
- 4- For point in interface, maximum added stress is occurred in surface of ground that with increasing of depth, it decreases.
- 5- Percentage of added stress due to adjacent structure on the main structure, with increasing depth increase.

REFERENCES

- [1] M.A. Shahin, H.R.Maier & M.B. Jakesa "Settlement prediction of shallow foundation on granular soil using B-spline neurofuzzy models " Computers and Geotechnics PP. 637-647.
- [2] Asghari Bizaki Farhad, "study of effect of foundation of adjacent structure with dissimilar storey together", master thesis , mazandaran University, 2006.
- [3] A. Amir " Interference effect on the behavior of footing" PHD thesis , university of Roorkee(1992).
- [4] Zhaojun. Xia, Nadir Ansari & Yanfu sun "Construction induced settlement of adjacent building" (2001) PP.868-875.
- [5] Joseph.E & bowles.PE "Foundation analysis and design" MCGraw-Hill company(1996) PP. 450.
- [6] Rahimian Mohammad, Eskandari Ghadi Morteza, " theory of elasticity" , Tehran University publication, 1998.
- [7] foroghi Hamid, " study of adjacent effect on the dynamic properties of structures" , master thesis , mazandaran University, 1998.