

Large-Deflection Analysis of Automotive Vehicle's Door Wiring Harness System Using Finite Element Method

Byeong-Sam Kim, Kangsu Lee, Kyoungwoo Park, and Samir Ben Chaabane

Abstract—A Vehicle's door wiring harness arrangement structure is provided. In vehicle's door wiring harness(W/H) system is more toward to arrange a passenger compartment than a hinge and a weatherstrip. This article gives some insight into the dimensioning process, with special focus on large deflection analysis of wiring harness(W/H) in vehicle's door structures for durability problem. An Finite elements analysis for door wiring harness(W/H) are used for residual stresses and dimensional stability with bending flexible. Durability test data for slim test specimens were compared with the numerical predicted fatigue life for verification. The final lifting of the component combines the effects of these microstructural features with the complex stress state arising from the combined service loading and residual stresses.

Keywords—Large deflection, Wiring harness system, Finite element analysis, Vehicle's door.

I. INTRODUCTION

In vehicle's door wiring harness(W/H) system is more toward to arrange a passenger compartment than a hinge and a weatherstrip. An opening/closing member of a vehicle is attached to a vehicle by a hinge in a manner enabling easy opening and closing of the opening/closing member. Such members include doors, such as side-doors and rear doors, and other opening/closing members, such as trunk lids. Definitely any wiring harness, it should have sufficient strength to withstand any abrupt situations without affecting the performance of the total system. Fig.1 shows the typical wiring harness system of the front portion of the car[1], [2]. An automotive electronic system has been able to anticipate their needs for reliable and cost effective connection systems. A vehicle's wiring harness(W/H) system keeps everything else going, powering every component, every switch, and every device. It's the vehicle's central nervous system. It must work,

every time and all the time. Without connection system, no system will work; it will play vital role any industry whether in automotive. The main function of the connection system is to distribute the power supply from one system to another system. The wiring harness system must not only conform to such mechanical performance requirements; like strength, engage force, mating force, durability, but also to electrical performance requirements like low level termination resistance, voltage drop, isolation resistance, temperature rise. In arranging a wire harness on a vehicle door, when the wire harness is arranged from a passenger compartment side of an inner panel to the body side of the door, the wire harness is not passed through an aperture so that installment becomes easy. However, since the wire harness is arranged at a point closer to the passenger compartment side than a hinge joining the body and the door, it becomes necessary to extend or contract the wire harness as the door is opened or closed.

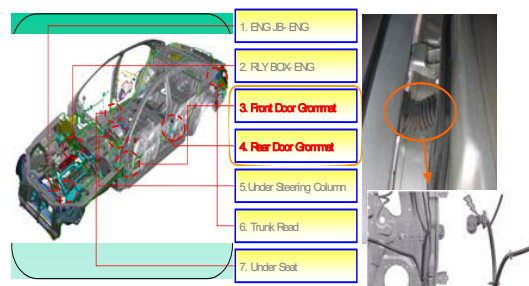


Fig. 1 Automotive front door wiring harness (W/H) system: open/close position

However, when following the above-noted opening/closing operation, W/H system was a problem of the fatigue, where a tube, grommet, copper etc after 1 or 5 x10⁵ cycle. This paper gives some insight into the dimensioning process, with special focus on fatigue analysis of W/H in vehicle's door structures [3].

II. LARGE DEFLECTION ANALYSIS

A. Definition of Model

The large deflection problem considered in this study is to behaviour of front door due to the physical JIG design for test results performance, reliability data for analysis.

Manuscript received March 31, 2008.

Byeong-Sam Kim is Associate Professor the Automotive Engineering Department with Hoseo University, Asan, 336-795, Korea (corresponding author to provide phone: 82-41-540-5814; fax: 82-41-540-5818; e-mail: kbs@hoseo.edu).

Kangsu Lee was with IBM PDM Department, Seoul, Korea. He is now with the Department of Automotive Engineering, Hoseo University, Asan, 336-795, Korea (e-mail: kslee@hoseo.edu).

Kyoungwoo Park is with the Mechanical Engineering Department, Hoseo University, Asan, 336-795, Korea (e-mail: kpark@hoseo.edu).

Samir Ben Chaabane is Associate Professor, Pole Universitaire Leonard de Vinci, 92916 Paris la Defense, France (e-mail: samir.benchaabane@devinci.fr).


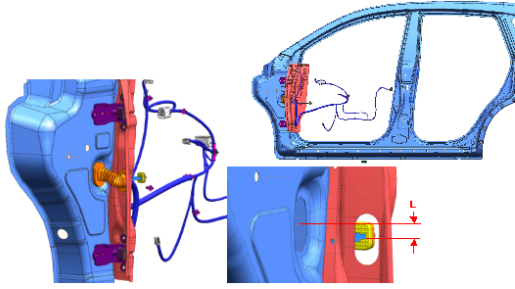



Fig. 2 Door structure and wiring harness(W/H) system

Fig. 2 shows extracted from the body and door structure of the wire line as a reference guide to using sweep capabilities to create a solid model. The scope of this work into develops a slam tester method. The slam tester is designed by Packard Korea in collaboration with GM-Daewoo (Fig. 2). In automotive industry a long development period is necessary to secure the safety and the reliability of the vehicle within the fatigue and durability considerations. The slam test is necessary to extend these investigations to the W/H while the door is opened and closed. The cause of W/H failure is analyzed by the slam tester[4]. Each time the door is opened or closed the W/H is subjected to combined tension/bending loading. Hence a nonlinear large deflection analysis needs to be performed to find out the resulting plastic deformation after the towing loads are removed.

B. FEM Modeling for W/H

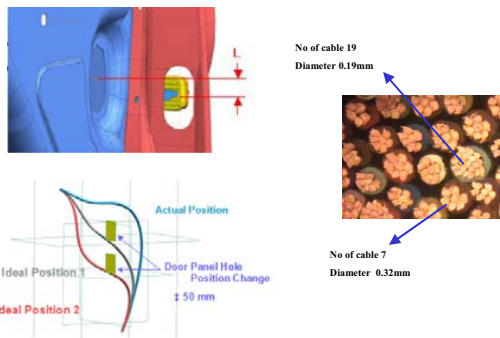

(a) Number of cable 19 with 0.19 mm

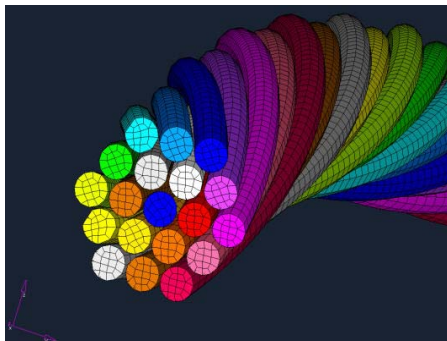

(b) Wire twist model complete

Fig. 3 Simplified 3D model for wire harness and cable

Each of the finite element models created for the different test configurations in this work were developed with a computer aided design pre-processor. The W/H front door finite element models had the same cable bundle configuration as the samples used in the experimental tests. Some geometrical assumptions were used to represent the W/H and to simplify the 3D model. We estimate that the stiffeners of the outside tape are negligible. Fig. 3(a) shows the 3D model of the bundle composed of 19 wires of 0.19 mm diameter. The deformed configuration of the cables is presented in Fig. 3(b).

C. FEM Dynamic Analysis

The analyses were performed using the commercial nonlinear finite element code ABAQUS Explicit v6.6 [5], [6] executed on IBM A-Pro (dual CPU 2GHz). The Abaqus explicit dynamics procedure performs a large number of small time increments efficiently. An explicit central-difference time integration rule is used; each increment is relatively inexpensive (compared to the direct-integration dynamic analysis procedure available in Abaqus/Standard) because there is no solution for a set of simultaneous equations. The explicit dynamics analysis procedure is based upon the implementation of an explicit integration rule together with the use of diagonal ("lumped") element mass matrices[7]-[10].

The equations of motion for the body are integrated using the explicit central-difference integration rule [6].

$$\dot{u}_{(i+1/2)}^N = \dot{u}_{(i-1/2)}^N + \frac{\Delta t_{(i+1)} + \Delta t_{(i)}}{2} \ddot{u}_{(i)}^N$$

$$u_{(i+1)}^N = u_{(i)}^N + \Delta t_{(i+1)} \dot{u}_{(i+1/2)}^N \quad (1)$$

where u^N is a degree of freedom and the subscript i refers to the increment number in an explicit dynamics step. The central-difference integration operator is explicit in the sense that the kinematic state is advanced using known values of $\dot{u}_{(i-1/2)}^N$ and $\ddot{u}_{(i)}^N$ from the previous increment. The explicit integration rule is quite simple but by itself does not provide the computational efficiency associated with the explicit dynamics procedure. The key to the computational efficiency of the explicit procedure is the use of diagonal element mass matrices because the accelerations at the beginning of the increment are computed by

$$\ddot{u}_{(i)}^N = (M^{NJ})^{-1} + (P_{(i)}^J - I_{(i)}^J) \quad (2)$$

where M^{NJ} is the mass matrix, P^{NJ} is the applied load vector, and I^{NJ} is the internal force vector. A lumped mass matrix is used because its inverse is simple to compute and because the vector multiplication of the mass inverse by the inertial force requires only n operations, where n is the number of degrees of freedom in the model. The explicit procedure requires no iterations and no tangent stiffness matrix. The internal force vector, I^{NJ} , is assembled from contributions from the individual elements such that a global stiffness matrix need not be formed.

D. Material Properties

The tube material is supposed to be the same as the wires one. The wire material is copper alloy their properties are given by Packard Korea[3], [4]. The characteristics of the W/H are presented in Table I. Several factors are very important in the test, but this study, is difficult to proceed as it did not fit the exclusion, and environmental, tolerance criteria of the cable as shown in Table I. The material properties are used for the W/H is Elasto-Plastic materials.

TABLE I

SPECIFICATION OF W/H TYPE BY STANDARD AVSS SERIES (UNIT:MM)

Section	Cable bundle /diameter	Wire Diameter	Thickne ss of Cable	Outside Diameter		Resistan ce
				Standard	Max	
0.3	7/0.26	0.8	0.3	1.4	1.6	50.2
0.5	7/0.32	1.0	0.3	1.6	1.7	32.7
0.85	19/0.24	1.2	0.3	1.8	1.9	21.7
1.25	19/0.29	1.5	0.3	2.1	2.2	14.9
20.	37/0.26	1.8	0.4	2.6	2.7	9.5

E. Boundary Condition

The contacts interactions are considered between the cables. To avoid the out of plane deformation of the 19 wires, they are enveloped by a tube represented by a shell 0.15 mm thickness. A rotation is imposed to the bundle, and represents the opening of the door by 75°. This rotation induced two bending/torsion moments of the wires considered Table II shows the different configurations corresponding to depth with the door body.

TABLE II


DIFFERENCE DEPTH WITH DOOR POSITION IN EACH CASE

Stand ard	Cable Bundle /Diameter	Difference depth with door body	Case
AVS S	7/0.32	50 mm	Case 1
		50+50 mm	Case 2
		50+50+50 mm	Case 3
AVS S	19/0.19	50 mm	Case 4
		50+50 mm	Case 5
		50+50+50 mm	Case 6


III. SLAM TEST

A. W/H Test Model

The slam test is necessary to extend these investigations to the W/H while the door is opened and closed. The cause of W/H failure is analyzed by the slam tester [11]. Each time the door is opened or closed the W/H is subjected to combined tension/bending loading (Fig. 4).

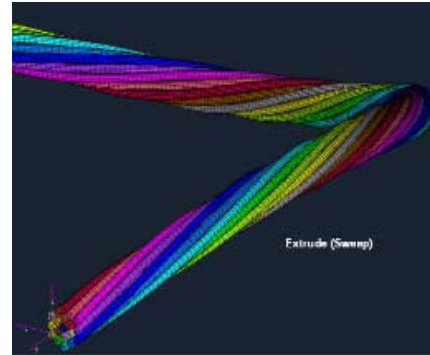

(a) Wire twist model with contact condition

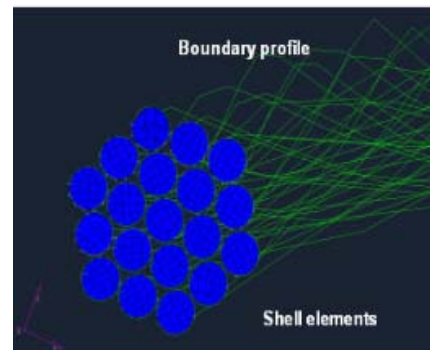


(b) Boundary condition with contact model

Fig. 4 FE Model for non linear analysis with boundary condition

The W/H failure by the crack is estimated to occur in the passed-up elastic tube, and in the inner copper cable. This failure can be considered in this kind of problem: number of bundle in a wire, cable diameter, clearance, elasticity of the tube, etc. The slam tester design cause failure analysis to be presented through the design guide line [1], [2] and [12], but all car manufacturers have their own unique features and systems design expertise.

B. Test Setting

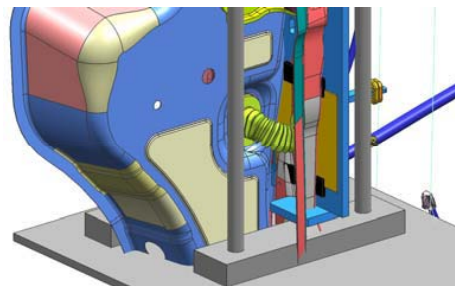

(a) 3D model simulation for slam tester



(b) Lift gate setting for W/H simulation

Fig. 5 3D model simulation for slam tester and W/H setting

The test equipment is configured such as the door opened/closed 10 times/min, the resistance of the each wire is measured every 10,000 cycle beyond the 50,000 cycle to 350,000 cycles [13]-[15]. Actual vehicle front door W/H mainly applies a 7 cable bundles and 19 cable bundles. In Table III we easily identify the damage of the wire. For the 7 cable bundle cable, with a depth of 50 mm and wires length of 600 mm, the resistance value changes of the 350,000 cycles, as shown in Table III (sample 14).

IV. RESULTS AND DISCUSSION

Fig. 6 and Fig. 7 show the difference depth with front door body. This is means that larger number of cable with wire is not less than the variation mode is a lot more flexible and also stresses that the work can be seen. In addition, if the same contribute with cable larger depth with door body stresses that the work can be found in Table III. The numerical and experimental results obtained for 7 wires and 19 wires bundles are presented and compared in Table IV, for the 50 mm depth case. The numerical result seems to be approved by the experimental tests. Through comparison of the above, the method of endurance analysis and results of wire harness for the endurance of flexible bending can secure the trust were shown in Table III.


TABLE III

RESULTS OF MAXIMUM STRESSES AND ENDURANCE LIFE CYCLES FOR THE DIFFERENT CASES (UNIT N/MM²)


Cable No /Diameter (7/0.32 mm)	Case 1 (Depth 50mm)	Non linear	Max. Stress	7.26
		Endurance	Cycle	487,000
	Case 2 (Depth 100mm)	Non linear	Max. Stress	6.87
		Endurance	Cycle	518,000
	Case 3 (Depth 150mm)	Non linear	Max. Stress	3.04
		Endurance	Cycle	600,000
Cable No /Diameter (19/0.19 mm)	Case 4 (Depth 50mm)	Non linear	Max. Stress	3.78
		Endurance	Cycle	Infinite
	Case 5 (Depth 100mm)	Non linear	Max. Stress	3.62
		Endurance	Cycle	Infinite
	Case 6 (Depth 150mm)	Non linear	Max. Stress	1.60
		Endurance	Cycle	Infinite

If the number of cable with the same time as a big difference depth knows that the endurance life cycle is improved [8]. The results obtained for the 6 cases of the Table III and Table IV show that:

- the 19 wires bundle is more flexible than the 7 wires bundle.
- the maximum stress level is higher in the 7 wires bundle.
- the stress level is higher for the 50 mm depth cases in Table IV.

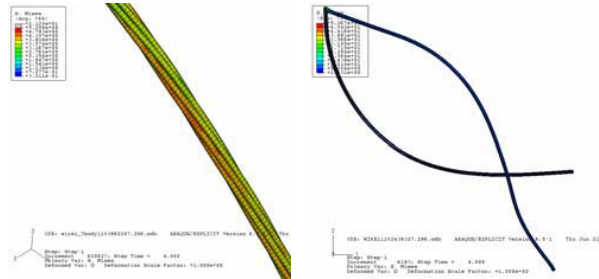

(a) Stresses distribution (b) Maximum deflection of cable bundle
Fig. 6 Non linear large-deflection analysis with stress distribution and maximum deflection with before and after case 2 (ABAQUS)

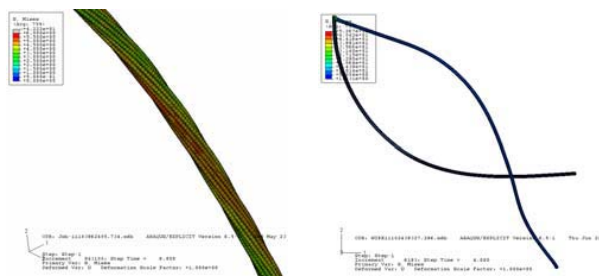

(a) Stresses distribution (b) Maximum deflection of cable bundle
Fig. 7 Non linear large-deflection analysis with stress distribution and maximum deflection with before and after case 5 (ABAQUS)

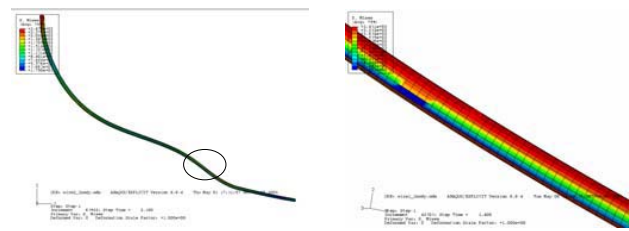


Fig. 8 Von- Mises Stresses in wire cable (7 No of cable, case 2)

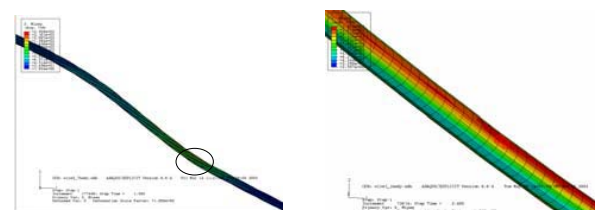


Fig. 9 Von- Mises Stresses in wire cable (19 No of cable, case 6)

TABLE IV
COMPARE WITH SLAM TEST RESULTS AND ENDURANCE ANALYSIS

Evaluation	No of cable /Diameter	Standard	FE Analysis Result	Test Result
Endurance Life Cycle	7/0.32mm	100,000	487,000	353,054
(Depth 50mm)	19/0.19mm	100,000	Infinite life	Infinite life

V. CONCLUSION

From the FE analysis results, it indicates that the results are well within the design standards. By adopting FE analysis using ABAQUS and FEMFAT, it not only saves time, money & slam testing but also guides the product engineer for further improvement and modification of the W/H system. The biggest challenges of such analyses are: FE modeling of the wiring hardness with analytical rigid surfaces and dealing with convergence issues due to large deformation of the elements. This research to improve the endurance life of W/H required for the life cycle design, analysis and testing for the integration of these technologies and secure source technology to derive prototype has been applied, the following were able to obtain useful results. The slam tester, designed and built by the vehicle's test was able to reduce the time and cost. The endurance life cycle how to establish durable, and is designed to help improve productivity, and to be tested. Through comparison of the test results and analysis, vehicle's W/H of the results for the endurance can secure the trust wires, depth due to the number of design guidelines to provide for the endurance life efficiency.

ACKNOWLEDGMENT

This research was supported by the Academic Research fund of Hoseo University in 2007 by grant No. 2007-0108.

REFERENCES

- [1] E.M. Bungo, C.Rausch, "Design Requirements for: Metric-Pack and Global Termina", Packard Electric internal report, Warren, Ohio, 1990.
- [2] Packard Electric, "Environmentally protected connector systems", Packard Electric internal report, Warren, Ohio, 1984.
- [3] B.S. Kim, K. S. Lee, "Life prediction analysis of wiring harness system for automotive vehicle", Internal report of Hoseo University, 2007.
- [4] B. Lakshmi, N. G. William, S. A Bhatia., "Non-linear finite element analysis of typical wiring harness connector and terminal assembly using ABAQUS/CAE and ABAQUS/Standard", 2006 ABAQUS users' conference, . Vol. 1, pp.345-357, 2006.
- [5] ABAQUS User's Manual Ver. 6.6, Dausault Systems Inc., 2007.
- [6] ABAQUS Example Problems Manual, Volume I, Version 6.2, 2007.
- [7] K. Miller, G. Joldes, D. Lance, and A Wittek, "Total Lagrangian explicit dynamics finite element algorithm for computing soft tissue deformation", *Communications in numerical methods in engineering*, Vol. 23, No. 2, pp. 121-134, 2007.
- [8] G. Lingtian, L. Kaishin, and L. Ying, "A meshless method for stress-wave propagation in anisotropic and cracked media", *International Journal of Engineering Science*, Vol. 45, Issues 2-8, pp. 601-616, 2007.
- [9] G. Benjamin, I. Andrew and K. Peter, "Sensitivity Analysis of Real-Time Systems", *International Journal of Computer Science*, Vol. 3 No. 1, pp.6-13, 2008.
- [10] K. Park, B. S. Kim, H.J. Lim, and all, "Performance Improvement in Internally Finned Tube by Shape Optimization", *International Journal of Applied Science, Engineering and Technology*, Vol. 4 No. 3, 2007.
- [11] M. Fermer, H. Svensson, "Industrial experiences of FE-based fatigue life predictions of welded automotive structures", *Fatigue & Fracture of Engineering Materials and Structures*, Vol. 24, No. 7, pp. 489-500, 2001.
- [12] W. Aichberger, H. Riener, and H. Dannbauer, "Regarding influences of production processes on material parameters in Fatigue Life Prediction", *SAE 2007 World Congress*, Vol.26, Detroit, 2007.
- [13] Gaier C., Kose K., Hebisch H., Pramhas G. (2005), "Coupling forming simulation and fatigue life prediction of vehicle components", NAFEMS 2005 conference, Malta.
- [14] Halász C., Gaier C., Dannbauer H. (2007), "Fatigue life prediction of thermo-mechanically loaded engine components", 11th European automotive congress, Budapest.
- [15] FEMFAT User's Manual Ver. 4.6 (2007), MAGNA Prowetrain Inc..