

# Introduction of the Harmfulness of the Seismic Signal in the Assessment of the Performance of Reinforced Concrete Frame Structures

Kahil Amar, Boukais Said, Kezmane Ali, Hamizi Mohand, Hannachi Naceur Eddine

**Abstract**—The principle of the seismic performance evaluation methods is to provide a measure of capability for a building or set of buildings to be damaged by an earthquake. The common objective of many of these methods is to supply classification criteria. The purpose of this study is to present a method for assessing the seismic performance of structures, based on Pushover method; we are particularly interested in reinforced concrete frame structures, which represent a significant percentage of damaged structures after a seismic event. The work is based on the characterization of seismic movement of the various earthquake zones in terms of PGA and PGD that is obtained by means of SIMQK\_GR and PRISM software and the correlation between the points of performance and the scalar characterizing the earthquakes will be developed.

**Keywords**—Seismic performance, Pushover method, characterization of seismic motion, harmfulness of the seismic signal.

## I. INTRODUCTION

EARTHQUAKES have occurred recently in the world, have revealed the vulnerability of old structures. It will be interesting to assess the vulnerability of these buildings in Algeria, to reduce the seismic risk to our cities [3]. This research mainly concerns the reinforced concrete frame structures built before the introduction of seismic standards in 1988 [3]. The main objective is the evaluation of the seismic performance of reinforced concrete frame buildings, which requires: The request, as a response spectrum obtained from Algerian seismic code [3]. The capacity, in the form of a non-linear curve obtained from the technique called "Pushover" [1], [2]. Reducing the danger of vibrations of the ground on structures requires a good estimate of the seismic loading, which these structures are subjected. Usually, the most used settings for their design are the peak ground acceleration (PGA) and the maximum displacement (PGD) [6]-[8].

## II. PEAK GROUND ACCELERATION

The value of Peak Ground Acceleration (Fig. 1) is the first parameter that was the basis for the classification of records

Kahil Amar is with the Department of civil engineering, faculty of construction engineering university Mouloud Mammeri –Tizi-Ouzou BP 17 Tizi-Ouzou 15000 (corresponding author; phone: +213-0560 632 935 (e-mail: amar.kahil@yahoo.com).

Boukais Said, Kezmane Ali, Hamizi Mohand, and Hannachi Naceur Eddine are with the Department of civil engineering, faculty of construction engineering university Mouloud Mammeri –Tizi-Ouzou BP 17 Tizi-Ouzou 15000 (e-mail: sbouka58@yahoo.fr, ali.kezmane@hotmail.fr, chamizi@yahoo.fr, hanachina@yahoo.fr).

[11]. Where many studies to find correlations between this term and the damage has been developed. This factor cannot represent alone the destructive power of an earthquake, as it was found moderate damages after major earthquakes. Conversely, some minor earthquakes produced massive destruction. Intuitively, one might think that the level parameter is not enough. Indeed, if lower levels of earthquake are kept long, the effect could be catastrophic.

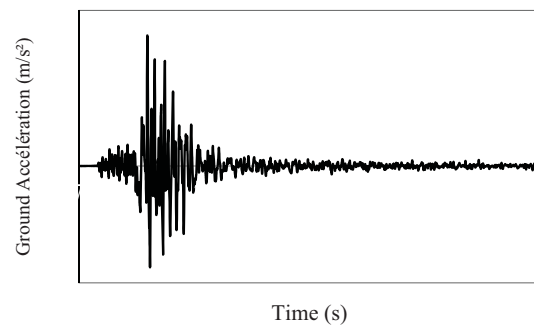


Fig. 1 Ground acceleration versus time

## III. PEAK GROUND DISPLACEMENT

The Peak Ground Displacement gives an idea of the magnitude of the relative displacement of center of gravity of the structure (Fig. 2) relative to its base: a few centimeters in low seismicity zone to a meter in highly seismic zone [7].

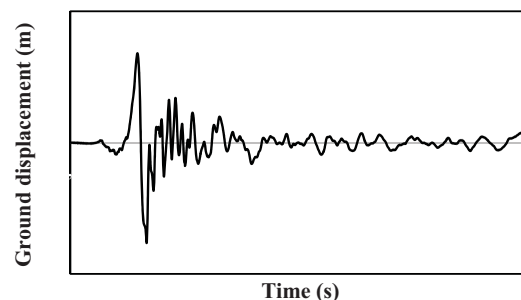


Fig. 2 Soil displacement versus time

The duration of the earthquake related to the magnitude, is a significant parameter in the cracking process and progressive degradation of the components of a construction. The latter is

maximum, to about 60 seconds in very seismic zone, but is only a few seconds in some low seismic area [9].

IV. CREATING A SYNTHETIC SIGNAL

Database as the creating of a natural earthquake database is complex; it was decided to create basic accelerometer signals, generated synthetically.

V. THE SOFTWARES

SIMQKE\_GR is used to generate the synthetic signal [10]. Its principle is to build the spectrogram of simulated signals, by analogy with the RPA response spectra 99 for the four types of soil, thereafter PRISM software 'for Earthquake Engineering' is used to estimate the PGA and PGD [4], the parameters characterizing the earthquakes.

VI. USED PROCEDURE

This work presents an outline of the procedure followed. The difficulty in understanding this process is the fact that the digital data are extremely wide, and so keep in mind some logic rankings. The schematic diagram (Fig. 3) shows a limited way, the path of the procedure in folders and subfolders. A program that includes all procedures permits, with the five accelerations for the four soil classes [3], to obtain a database of artificial earthquakes of forty (40) accelerograms [5].

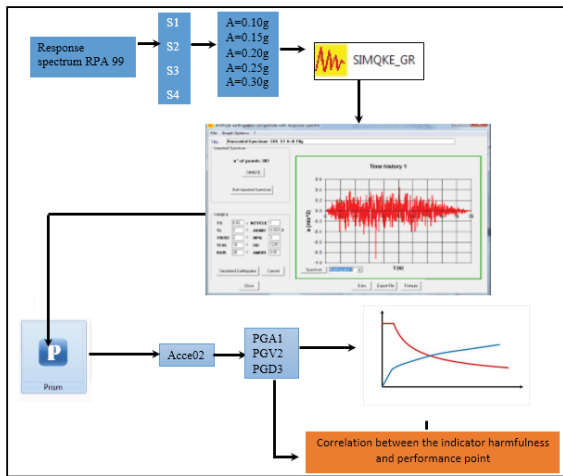


Fig. 3 Schematic diagram of the procedure

VII. PRESENTATION AND DESCRIPTION OF THE BUILDING

The building is used for housing, made up of reinforced concrete frames (columns, beams) with masonry in fills (Fig. 4).

All columns have the same cross section dimensions (35x35) cm<sup>2</sup>, their reinforcement is show in Fig. 5 [5].

VIII. ILLUSTRATION RESULTS

The graphs below show the behavior of the structure under study, according to the peak ground acceleration PGA for the

four types of sites S<sub>1</sub>, S<sub>2</sub>, S<sub>3</sub> and S<sub>4</sub>, which are classified according to the Algerian earthquake regulation in rocky sites, farm, loose and very loose [3].

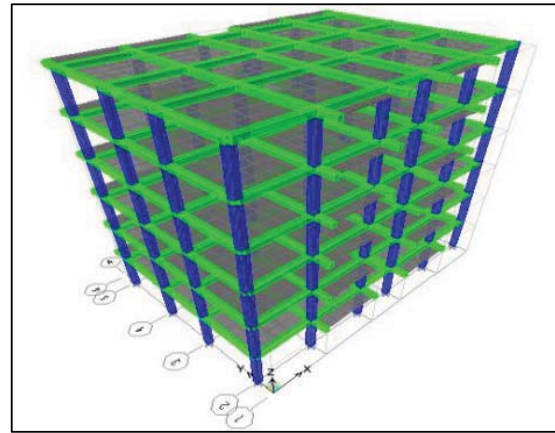


Fig. 4 3D view of the structure studied

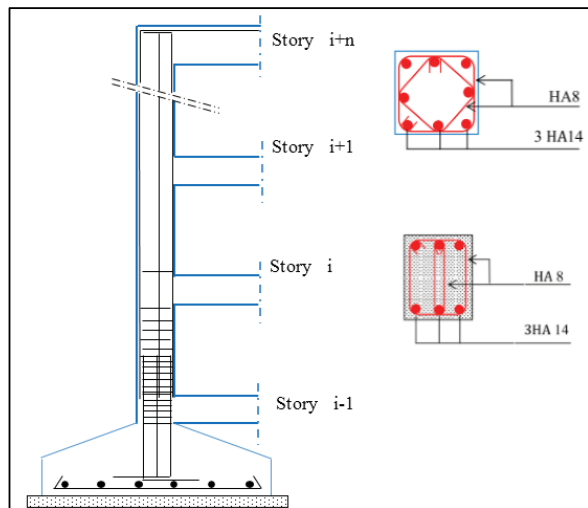


Fig. 5 Detail reinforcement elements of the structure studied

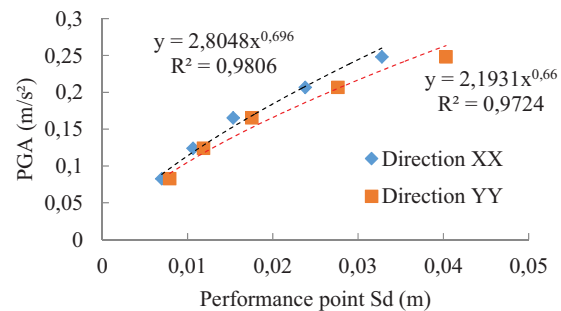


Fig. 6 Variation of PGA according to the performance point (soil S<sub>1</sub>)

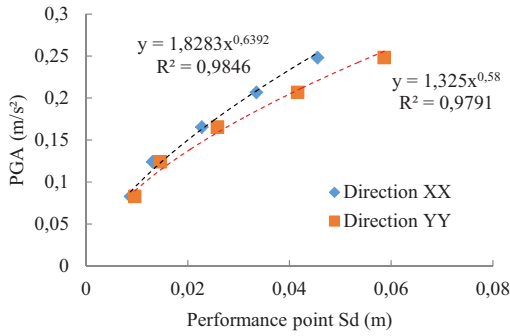


Fig. 7 Variation of PGA according to the performance point (soil S<sub>2</sub>)

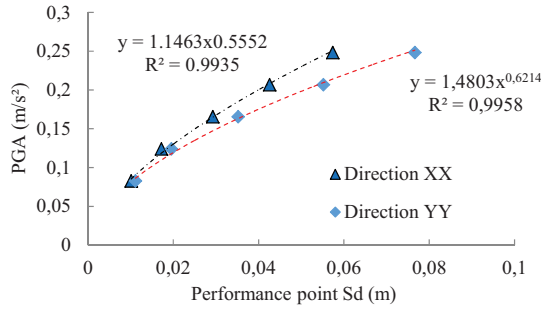


Fig. 8 Variation of PGA according to the performance point (soil S<sub>3</sub>)

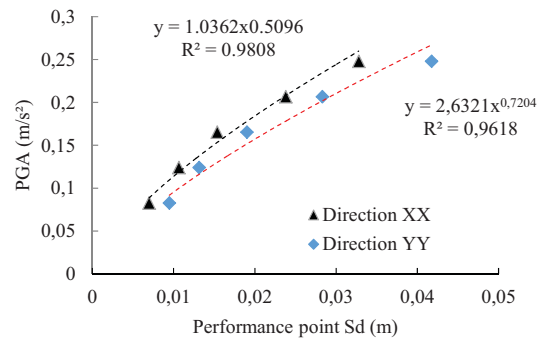


Fig. 9 Variation of PGA according to the performance point (soil S<sub>4</sub>)

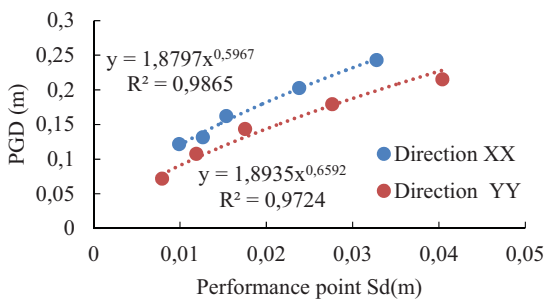


Fig. 10 Variation of PGD according to the performance point (soil S<sub>1</sub>)

Based on visual analysis of graphs, we see that the behavior of the displacement field structure varies from floor to another through a rocky site furniture or very loose site, as well as increased displacement i.e. that the performance of the structure decreases with the decrease in the mechanical characteristics of the soil.

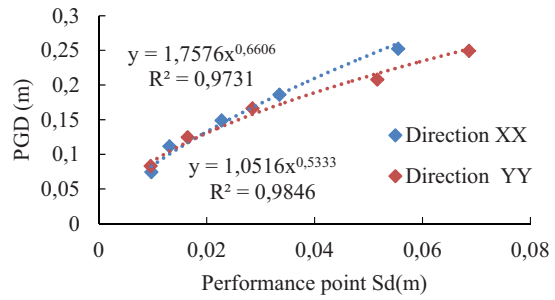


Fig. 11 Variation of PGD according to the performance point (soil S<sub>2</sub>)

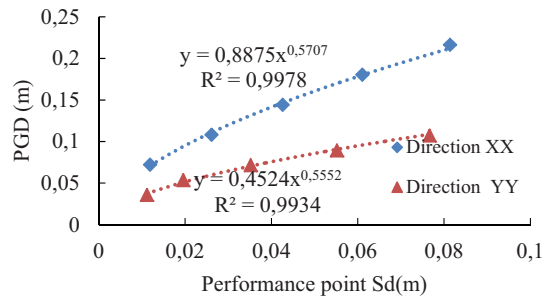


Fig. 12 Variation of PGD according to the performance point (soil S<sub>3</sub>)

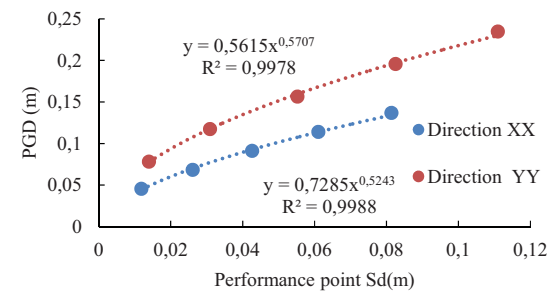


Fig. 13 Variation of PGD according to the performance point (soil S<sub>4</sub>)

The elaborate graphs allow understanding the behavior of a structure knowing his performance point for an earthquake characterized PGA or PGD. PGA approximation functions and DMP based on the performance point have correlation coefficients R<sup>2</sup> between 0.97 and 0.99 for the soil S<sub>1</sub>, (R<sup>2</sup>) between 0.98 and 0.99 for the S<sub>2</sub>, S<sub>3</sub>, and ground to a ground S<sub>4</sub> (R<sup>2</sup>) between 0.97 and 0.99

The approximation functions developed for each soil type are functions as power  $Y = a X^b$  or  $a$  and  $b$  are coefficients of determination which essentially depends on the mechanical characteristics of implantation of the soil to have the shear rate; the higher the speed the greater the determination coefficients increase.

Uncertainty about performance of structures during an earthquake characterized by a harm indicator was summarized by evaluating the correlation factors for performances (Sd-IN) established. These correlation factors can be directly read from the graphs in logarithmic scale.

## IX. CONCLUSION

The study was conducted on a reinforced concrete frame structure by Pushover method in order to highlight some essential criteria such as the influence of soil on the shear rate and the response of the structure on movement (performance point).

It is noticed that more the implantation soil is loose more the shear wave velocity is low, so the structure has a major vulnerability index. The study has mainly resulted in the development of a performance estimation model based on harm indicators and performance point, which allows us to understand realistically the behavior of reinforced concrete frame structures, under seismic action.

## REFERENCES

- [1] Applied Technology Council ATC-40. *Seismic evaluation and retrofit of concrete buildings*.
- [2] Chopra, A.K. & Goel, R.K. 1999. "Capacity-demand-diagram methods for estimating seismic deformation of inelastic structures: SDF systems", Report PEER-1999/02. Berkeley: Pacific Earthquake Engineering Research Center, University of California.
- [3] RPA99 (2003), "Règles Parasismiques Algériennes, Version 2003", Document technique réglementaire, DTR B C 2 48, Centre national de recherche appliquée en génie parasismique, Alger.
- [4] PRISM for Earthquake Engineering A Program for seismic response analysis of SDOF system Version 1.0.2
- [5] Kahil Amar, Hamizi Mohand, Hannachi Nacer Eddine- Taking into account the harmfulness of the seismic signal in assessing the seismic performance of buildings self-stable- *International Review of Civil Engineering (I.R.E.C.E.)*, Mai 2012. \*
- [6] Lesueur C., Schlupp A., Scotti O., Cara M. Et C. Sira (2009) – *Relationship between accelerometric measurements and macroseismic observations: Mulhouse area*, France. Provence 2009. Aix-en-Provence, July 6-8 2009. (Gutenberg et Richter, 1956; Hershberger, 1956).
- [7] Wald D.J., Quitoriano V., Heaton T.H., Kanamori H., Scrivner C.W., Worden C.B. (1999b) - *TriNet "ShakeMaps." Rapid generation of instrumental ground motion and intensity maps for earthquakes in southern California*, *Earthquake Spectra*. 15 (3), 537-555.
- [8] Atkinson G.M., S.I. Kaka (2006) - *Relationships between felt intensity and instrumental ground motion for New-Madrid Shakemaps*, Dept. of Earth Sciences, Carleton University, Ottawa, Canada K1S 5B6.
- [9] Atkinson G.M., Sonley E. (2000) - *Empirical relationships between Modified Mercalli intensity and response spectra*. Bull. Seism. Soc. Am. 90, 537-544.
- [10] SIMQKE\_GR.exe (versione 2.7), Programma per la generazione di accelerogrammi artificiali spettro-compatibili.
- [11] Fukushima, Y. and T. Tanaka (1990) A new attenuation relation for peak horizontal acceleration of strong earthquake ground motion in Japan, *Bull. Seis. Soc. Am.*, Vol. 80, 757-783.