

# Aerodynamic Coefficients Prediction from Minimum Computation Combinations Using OpenVSP Software

Marine Segui, Ruxandra Mihaela Botez

**Abstract**—OpenVSP is an aerodynamic solver developed by National Aeronautics and Space Administration (NASA) that allows building a reliable model of an aircraft. This software performs an aerodynamic simulation according to the angle of attack of the aircraft makes between the incoming airstream, and its speed. A reliable aerodynamic model of the Cessna Citation X was designed but it required a lot of computation time. As a consequence, a prediction method was established that allowed predicting lift and drag coefficients for all Mach numbers and for all angles of attack, exclusively for stall conditions, from a computation of three angles of attack and only one Mach number. Aerodynamic coefficients given by the prediction method for a Cessna Citation X model were finally compared with aerodynamics coefficients obtained using a complete OpenVSP study.

**Keywords**—Aerodynamic, coefficient, cruise, improving, longitudinal, OpenVSP, solver, time.

## I. INTRODUCTION

NEARLY 14,000 airplanes share the sky every day, emitting on average 0.81 tons of carbon dioxide (CO<sub>2</sub>) each [1]. Due to the constant increase of air traffic, an ecologic program has been implemented by the International Civil Aviation Organization (ICAO) aiming to reduce CO<sub>2</sub> emissions to 50% of the level measured in 2005 hence 30 years [2]. According to this statement, the aeronautical industry has the big challenge of considerably improving fuel consumption of aircraft. From this idea, researchers suggest several solutions such as improving or finding new trajectories, rehashing management of regular airlines, upgrading geometry shapes and materials, and many other solutions.

At the Research Laboratory in Active Controls, Avionics and Aeroservoelasticity (LARCASE) in Montréal, a project aiming to improve regular airlines trajectories has already shown an upgrade (reduction) on fuel consumption. Indeed, using different research algorithms, a reduction from 1.75% to 8% of fuel burn on a complete flight was found in references [3]-[12]. Furthermore, another project suggested that a smart wing can also decrease fuel consumption of an aircraft. In fact, this “smart” wing, better known under the name “morphing

wing” has the purpose to change the shape of a wing during the flight. During the flight, several actuators can shift the shape of this wing and adapt it in the best way available for each flight condition. Hence, for each flight condition, drag and lift of the wing are optimized. This interesting technology has already shown successfully aerodynamic results, notably for an application on an Unmanned Aerial Vehicle (UAV), in the context of Consortium for Research and Innovation in Aerospace in Quebec (CRIAQ) 7.1 and CRIAQ Modelisation Simulation and Optimization (MDO) 505 projects [13]-[15]. In this idea, another new project conducted at LARCASE laboratory aims to evaluate performances of an aircraft equipped with modular wing for a cruise flight. In order to conduct regime investigation, a reliable numerical model able to compute aircraft aerodynamic characteristics from its geometry is required. To build this kind of model, an aerodynamic solver is needed. Aerodynamic solvers are software able to simulate an aircraft in its environment, and among those, some software give preference to a good accuracy of computations, and, other software favor rather a small time of computation. In this way, because it is the beginning of the project, OpenVSP software was chosen to perform this pre-study especially because of the fact that is enough reliable within a reasonable computation time. OpenVSP computes aerodynamic coefficients such as the lift coefficient and the drag coefficient for a given flight condition (an angle of attack  $\alpha$ , a Mach number  $M$  and an angle of deviation  $\beta$ ) [16]-[19].

As part of the project is conducted at the LARCASE, a given aircraft, the Cessna Citation X was arbitrary chosen. Moreover, as the cruise regime is the longest part of the flight, the geometry optimization by “Morphing-Wing” technology is focused for a range of Mach number between 0.6 to 0.9 and angles of attack from -2 to 14 degrees. To perform this study, 36  $\alpha$ -Mach combinations that take around 20 minutes are required. This is a small computation time for particularly studies, and it is long enough for pre-design studies.

In order to minimize the number of computations required by OpenVSP software for a complete study, this article presents a method to predict all combinations of angles of attack and Mach numbers from a minimum amount of computation combinations. This prediction is going to improve considerably computation time required for a pre-design study using OpenVSP. The paper is organized in two main sections: a methodology section and a result section. The methodology section is divided in two subsections: the first

Marine Segui is an M.Sc.A Student with the Laboratory of Active Controls Avionics and AeroServoElasticity (LARCASE), at Ecole de Technologie Supérieure (ETS), Montreal, QC H3C-1K3 CA.

Ruxandra Mihaela Botez is professor and Canada Research Chair Holder Level 1 in Aircraft Modelling and Simulation Technologies, LARCASE, ETS, Montreal, QC H3C-1K3 Canada (e-mail: ruxandra.botez@etsmtl.ca).

subsection aims to present the model of the Cessna Citation X designed using OpenVSP and to show how accurate it is with a comparison using a reliable source, and the second subsection presents the prediction methodology aiming to improve computation required with an OpenVSP study.

## II. METHODOLOGY

In this section, the methodology used to reduce time of an aerodynamic computation with OpenVSP is developed. Firstly, an aerodynamic model of the Cessna Citation X is designed using OpenVSP, and is validated by means of a Level D Research Aircraft Flight Simulator (RAFS). The level D is the highest degree of certification given by Federal Aviation Administration (FAA) [20]. Then, this model is used to improve time computation for several conditions of Mach numbers and angles of attack.



Fig. 1 Lift and drag forces applied on an aircraft

### A. Conception and Validation of an Aerodynamic Model of the Cessna Citation X Using OpenVSP

OpenVSP software is an aerodynamic solver that enables the computation of aerodynamics coefficients of an aircraft from its geometry. Because lift  $L$  and drag  $D$  forces depend on lift  $C_L$  (1) and drag coefficients  $C_D$  (2), an aerodynamic comparison can be established from these aerodynamic coefficients  $C_L$  and  $C_D$  [21], [22]. Hence, the effectiveness of the Cessna Citation X model built using OpenVSP software is only measured by computed aerodynamic coefficients.

$$L = \frac{1}{2} \rho S V^2 C_L \quad (1)$$

where  $L$  is the lift force (N),  $\rho$  is the fluid density ( $\text{kg/m}^3$ ),  $S$  is the reference area of the aircraft ( $\text{m}^2$ ),  $V$  is the fluid velocity ( $\text{m/s}$ ) and  $C_L$  the lift coefficient.

$$D = \frac{1}{2} \rho S V^2 C_D \quad (2)$$

where  $D$  is the drag force (N),  $\rho$  is the fluid density ( $\text{kg/m}^3$ ),  $S$  is the reference area of the aircraft ( $\text{m}^2$ ),  $V$  is the fluid velocity ( $\text{m/s}$ ) and  $C_D$  the drag coefficient.

Because of the fact that the RAFS gives aerodynamic coefficients for two components: the “Wing-Body” and the “Horizontal Tail” component, it is required to design one of these components in order to, validate the model. The “Wing-Body” component is composed of a wing, a fuselage and a vertical tail. Because of the fact that the global goal of the project is to change the shape of the wing, the “Wing-Body” component model is required.

The design of the Cessna Citation X “Wing-Body” model

using OpenVSP consisted in reproducing its geometry on the solver interface. By default, OpenVSP has already wing and fuselage basic components. Consequently, to design the model of the “Wing-Body” of the Cessna Citation X, it is required to set two wings and a fuselage component with Cessna Citation X geometrical properties shown in Table I. The Cessna Citation X “Wing-Body” model is presented in Fig. 2.

TABLE I  
GEOMETRICAL PROPERTIES OF THE CESSNA CITATION X

Designation	Value	Unit
<b>Fuselage</b>		
Medium Diameter	1.71	m
Length	18.90	m
<b>Wing</b>		
Wingspan	19.38	m
Aspect Ratio	7.80	m
Dihedral	2.0	deg
Airfoils	CESS-CX-W0	-
	CESS-CX-W4	-
<b>Vertical Tail</b>		
Wingspan	3.41	m
Area	10.31	$\text{m}^2$
Airfoil	NACA0009	-

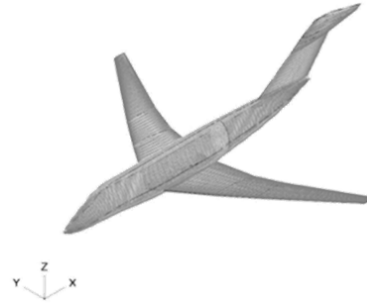


Fig. 2 Cessna Citation X designed on OpenVSP interface

To compute aerodynamic coefficients  $C_L$  and  $C_D$ , OpenVSP needs an angle of attack  $\alpha$ , an angle of deviation  $\beta$ , and a Mach number  $M$ . In this global project, the objective is to simulate only the longitudinal behavior of the aircraft. More precisely, the study here conducted is based on a cruise trajectory exclusively. That is why the angle of deviation  $\beta$  is considered equal to zero, the angle of attack  $\alpha$  was taken between -2 degrees to 14 degrees and the Mach number  $M$  was taken from 0.6 to 0.9. Moreover, OpenVSP software offered two computational methods, the Vortex Lattice Method (VLM) and the Panel Method (PN). Because of the fact that the PN cannot give all aerodynamic coefficients needed, the VLM method was chosen by default. Aerodynamic coefficients  $C_L$  and  $C_D$  obtained by OpenVSP simulation of the model designed (Fig. 2) are presented in Figs. 3 and 4 for Mach numbers, angles of attack, and angles of deviation described previously.

Fig. 3 presents comparison of the lift coefficient  $C_L$  obtained by OpenVSP (in the red line) and the  $C_L$  given by the flight simulator (in blue line). For Mach number equal to 0.6

and Mach number equal to 0.7, data match very well under an angle of attack  $\alpha = 14^\circ$ . The difference over  $\alpha = 14^\circ$  is due to the stall of the aircraft, in fact, OpenVSP does not take into

account the stall characteristics and therefore cannot predict the aerodynamic coefficients associated with this phase of flight, and after it.

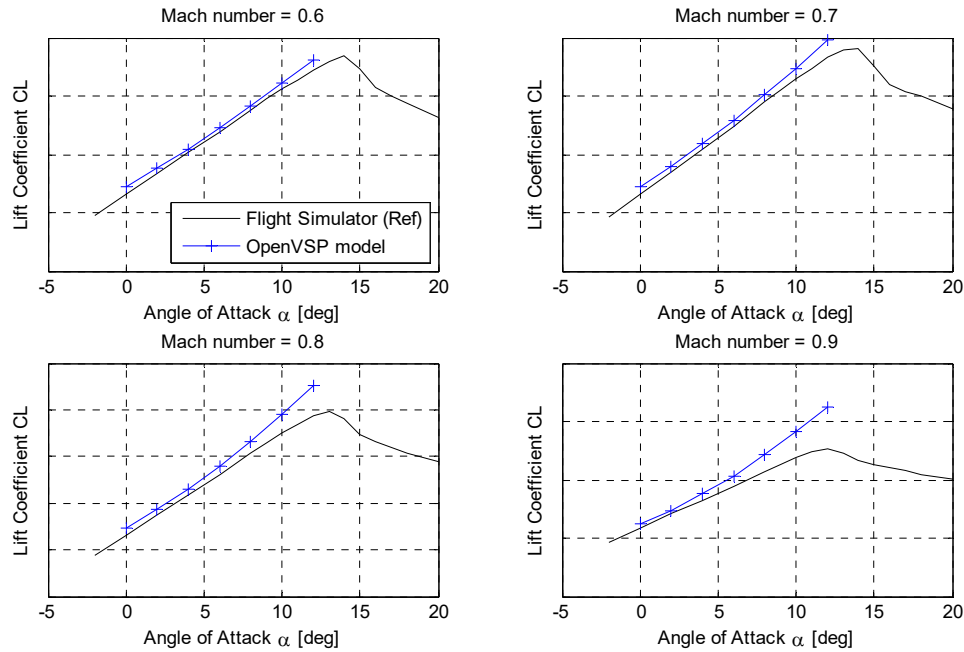


Fig. 3 Comparison between lift coefficients obtained by the simulator and the model build with OpenVSP for Mach numbers 0.6 to 0.9 and for  $\alpha$  -2 to 12 degrees

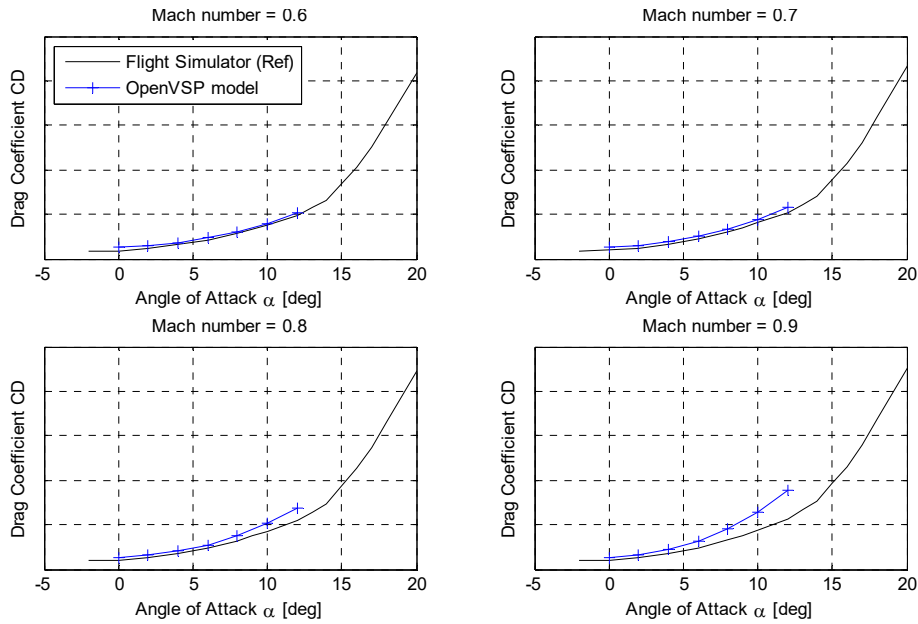


Fig. 4 Comparison between drag coefficients obtained by the simulator and the model build with OpenVSP from Mach number 0.6 to 0.9 and from  $\alpha$  -2 to 12 degrees

Fig. 4 presents the comparison of drag coefficient  $C_D$  obtained by OpenVSP (in the red line) and  $C_D$  given by the flight simulator (in blue line). For Mach number equal to 0.6 and Mach number equal to 0.8, such as in the case of previous

comparison for the lift coefficient  $C_L$ , data match very well for all the range of angle of attack  $\alpha$  defined. For Mach number of 0.9, data do not match well which is explained by the existence of transonic regime for which OpenVSP does not

give accurate enough results.

As results shown in Figs. 3 and 4, an aerodynamic model of the Cessna Citation X designed on OpenVSP software was validated.

### B. Lift and Drag Coefficients Prediction Methodology

The computation of  $C_L$  and  $C_D$  of the “Wing-Body” geometry for one Mach number and one angle of attack by OpenVSP takes around 30 seconds. In order to obtain all 36 aerodynamic coefficients for combinations of Mach numbers (0.6 to 0.9) and angles of attack (-2 to 14 degrees), 20 minutes are taken. That is really a long time of computation for a pre-design analysis. The global objective of this paper consists in dividing this time of computation without impacting accuracy acquired by Vortex Lattice Method to compute coefficients through OpenVSP software. Therefore, the method of reducing time is equivalent to computing aerodynamic coefficients  $C_L$  and  $C_D$  with OpenVSP for a minimum of  $\alpha$ -Mach combinations.

The method here presented for reducing computation time consists in the “use” of basic aerodynamic equations which expressed the lift coefficient  $C_L$  and the drag coefficient  $C_D$  with (3) and (4) respectively. It is well known from the literature [22], the lift coefficient  $C_L$  can be described by a linear relationship with respect to the angle of attack  $\alpha$  in the absence of stall conditions.

$$C_L = C_{L0} + \alpha * C_{La} \quad (3)$$

where  $C_{L0}$  is the zero-incidence lift coefficient dependent of the airfoil shape and the Mach number,  $C_{La}$  is the slope coefficient dependent on flight conditions, and  $\alpha$  is the angle of attack of the aircraft. In the same way, the drag coefficient  $C_D$  (4) is described by a second degree polynomial curve.

$$C_D = C_{D0} + \frac{C_L^2}{\pi * AR * \varepsilon} \quad (4)$$

where  $C_{D0}$  is the zero-lift drag coefficient, expressed as an offset that depends on the fluid parameters and the geometry of the aircraft's wing,  $C_L$  is the lift coefficient,  $AR$  is the aspect ratio and  $\varepsilon$  is the Oswald coefficient.

#### 1) Lift Coefficient Prediction for a Given Mach Number $M_1$

According to (3), because the lift coefficient  $C_L$  is in a linear relationship with the angle of attack  $\alpha$ , if the offset  $C_{L0}$  and the slope coefficient  $C_{La}$  are known, it is easy to compute all angles of attack desired for a same Mach number  $M_1$ . It is important to consider  $M_1$  the smallest possible, for instance,  $M_1$  equal to 0.2 gives good results.

##### a. Slope Coefficient $C_{La}$

The coefficient  $C_{La}$  is the slope of lift coefficient  $C_L$ , in the other words, using two values of lift coefficient  $C_L$  computed by OpenVSP for a same Mach number, it is easy to obtain  $C_{La}$  for the same Mach number  $M_1$  (5).

$$C_{La}(M_1) = \frac{C_L(\alpha_1, M_1) - C_L(\alpha_2, M_1)}{\alpha_1 - \alpha_2} \quad (5)$$

where  $C_{La}$  is the slope coefficient of the lift coefficient for a Mach number  $M_1$  ( $M_1 \leq 0.9$ ),  $C_L(\alpha_1, M_1)$  is the lift coefficient computed by OpenVSP software for  $\alpha_1$  and Mach number  $M_1$ , in the same way,  $C_L(\alpha_2, M_1)$  is the lift coefficient computed for  $\alpha_2$  and Mach number  $M_1$ . Angles of attack  $\alpha_1$  and  $\alpha_2$  must be distinct between -2 to 14°.

##### b. Zero-Incidence Lift $C_{L0}$

The coefficient  $C_{L0}$  is given in (6).

$$C_{L0}(M_1) = C_L(\alpha = 0^\circ, M_1) \quad (6)$$

where  $C_{L0}(M_1)$  is the zero incidence lift coefficient for a Mach number  $M_1$ , and  $C_L(\alpha = 0^\circ, M_1)$  is the lift coefficient computed by OpenVSP for an angle of attack equal to zero degrees and a Mach number  $M_1$ .

For lift coefficient prediction, for a given Mach number  $M_1$ , two computations (one for  $\{M_1, \alpha_1\}$  and one for  $\{M_1, \alpha_2\}$ ) are needed to predict the  $C_{La}$  (5). Among these two different angles of attack  $\alpha_1$  and  $\alpha_2$ , it is imperative to choose an angle of attack  $\alpha$  equal to zero degrees.

#### 2) Drag Coefficient Prediction for a Given Mach Number $M_1$

Then, to predict the drag coefficient  $C_D$ , a second degree curve is required (4). It is considered that the drag coefficient  $C_D$  can be predicted from lift coefficient  $C_L$ , the coefficient dividing the term  $C_L^2$ , and, the zero lift drag  $C_{D0}$ .

##### a. Zero-Lift Drag $C_{D0}$

The zero lift drag  $C_{D0}$  can be obtained for  $\{M_1, \alpha=0^\circ\}$  (7).

$$C_{D0}(M_1) = C_D(\alpha_0, M_1) \quad (7)$$

where  $C_{D0}(M_1)$  is the zero lift drag coefficient for a Mach number  $M_1$ , and  $C_D(\alpha_0, M_1)$  is the drag coefficient computed by OpenVSP for an angle of attack  $\alpha = 0$  and a Mach number  $M_1$ .

##### b. Induced Drag $C_{Di}$

Considering the coefficient dividing the term  $C_L^2$  in (4), it depends on flight conditions and aircraft wing's shape. Because of the difficulty to compute independently this coefficient, it is necessary to throw it. To reach the objective, a polynomial equation is estimated from three points computed by OpenVSP software given in (8).

$$C_D(M_1) = A_0 + A_1 * C_L(\alpha_1, M_1) + A_2 * C_L(\alpha_2, M_1)^2 \quad (8)$$

where  $C_D(M_1)$  is the drag coefficient for a Mach number  $M_1$ , coefficients  $A_0$ ,  $A_1$ , and  $A_2$  are polynomial coefficients,  $C_L(\alpha_1, M_1)$  and  $C_L(\alpha_2, M_1)$  are respectively lift coefficients computed by OpenVSP for angles of attack  $\alpha_1$  and  $\alpha_2$  and for a Mach number  $M_1$ . Once polynomial coefficients  $A_0$ ,  $A_1$ , and  $A_2$  were found for Mach number  $M_1$ , the drag coefficient  $C_D$  can be predicted for a large range of angles of attack and a given Mach number  $M_1$ .

### 3) Aerodynamic Prediction for All Mach Numbers

Finally, from three computations  $\{M_1, \alpha_0\}$ ,  $\{M_1, \alpha_1\}$ , and  $\{M_1, \alpha_2\}$  using OpenVSP, it is possible to predict all lift and drag coefficients for a large range of angles of attack and Mach numbers (in the cruise phase of flight), using (9) and (10).

$$C_L(M_2) = \frac{C_{L\alpha}(M_1)}{\sqrt{1-M_2^2}} * \alpha + \frac{C_{L0}(M_1)}{\sqrt{1-M_2^2}} \quad (9)$$

where  $C_L(M_2)$  is the lift coefficient predicted for a given Mach  $M_2$ ,  $C_{L\alpha}(\alpha, M_1)$  is the lift slope computed for Mach number  $M_1$ ,  $C_{L0}(M_1)$  is the zero incidence lift coefficient also computed for Mach number  $M_1$  and finally,  $M_2$  is the Mach number which coefficients are predicted for.

$$C_D(M_2) = A_0 + A_1 * C_L(\alpha_1, M_2) + A_2 * C_L(\alpha_2, M_2)^2 \quad (10)$$

where  $C_D(M_2)$  is drag coefficient predicted for a given Mach  $M_2$ , coefficients  $A_0$ ,  $A_1$ , and  $A_2$  were found in (8), finally  $C_L(\alpha_1, M_2)$  and  $C_L(\alpha_2, M_2)$  are lift coefficients predicted for  $M_2$  and respectively angles of attack  $\alpha_1$  and  $\alpha_2$  in (9).

### III. RESULTS

This section exposes results obtained for several combinations of angles of attack and Mach numbers. A comparison is given between aerodynamic coefficients obtained by the Cessna Citation X Wing-Body model using OpenVSP (presented in the first part of the methodology), and aerodynamic coefficients predicted by the method described in the second part of the methodology. Data obtained by the RAFS are also presented in graphs shown in Figs. 5-8.

The methodology previously presented aims to improve the computation time required for an aerodynamic study on OpenVSP. To expose results of this study, figures are presented by charts depending on angles of attack  $\alpha$  included from  $-2^\circ$  to  $14^\circ$  and Mach number  $M$  from 0.6 to 0.9.

First, for  $M$  equal to 0.6, the difference observed between the lift and the drag coefficients  $C_L$  and  $C_D$  obtained by the model on OpenVSP, and by the prediction method is shown in Fig. 5. Moreover, data of the RAFS are also presented on this figure to show how accurate are the results. By the same way, results obtained for Mach equal to 0.7, 0.8 and 0.9 are respectively given in Figs. 6-8.

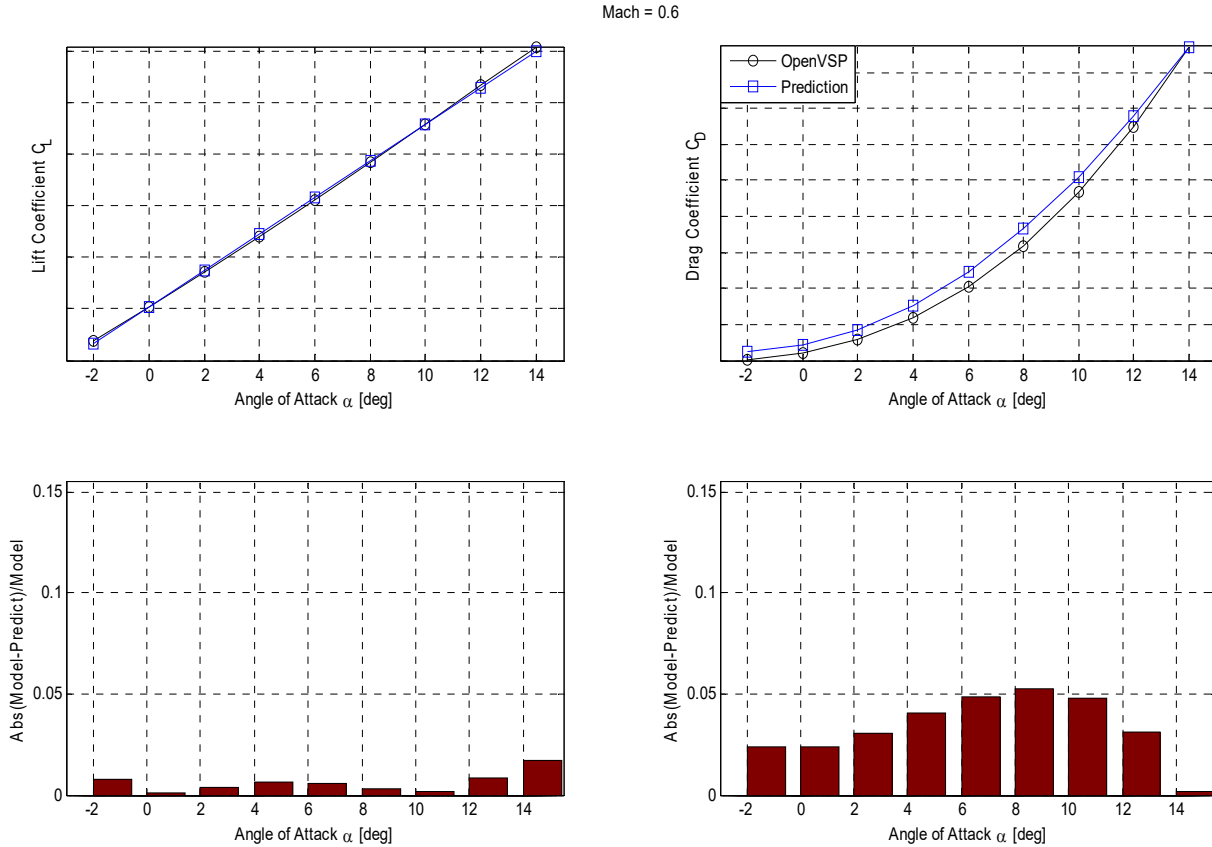


Fig. 5 Lift and drag coefficient comparison for Mach number equal to 0.6

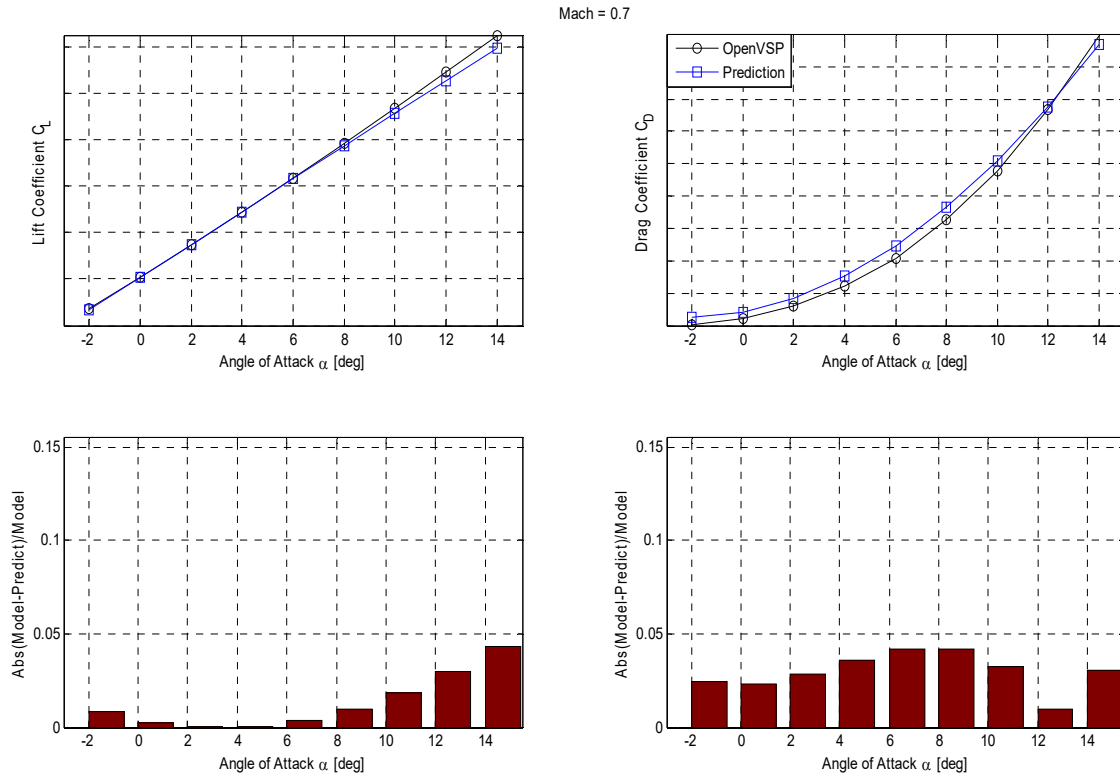


Fig. 6 Lift and drag coefficient comparison for Mach number equal to 0.7.

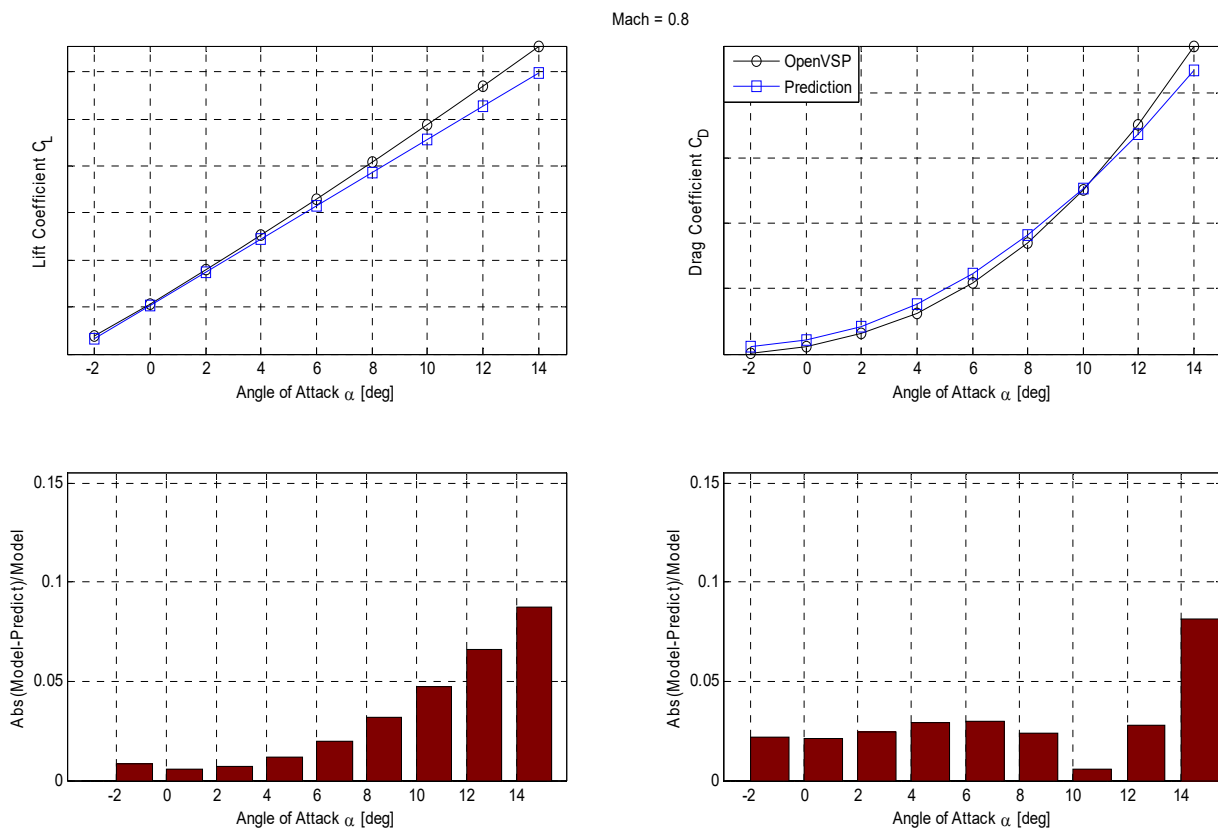


Fig. 7 Lift and drag coefficient comparison for Mach number equal to 0.8

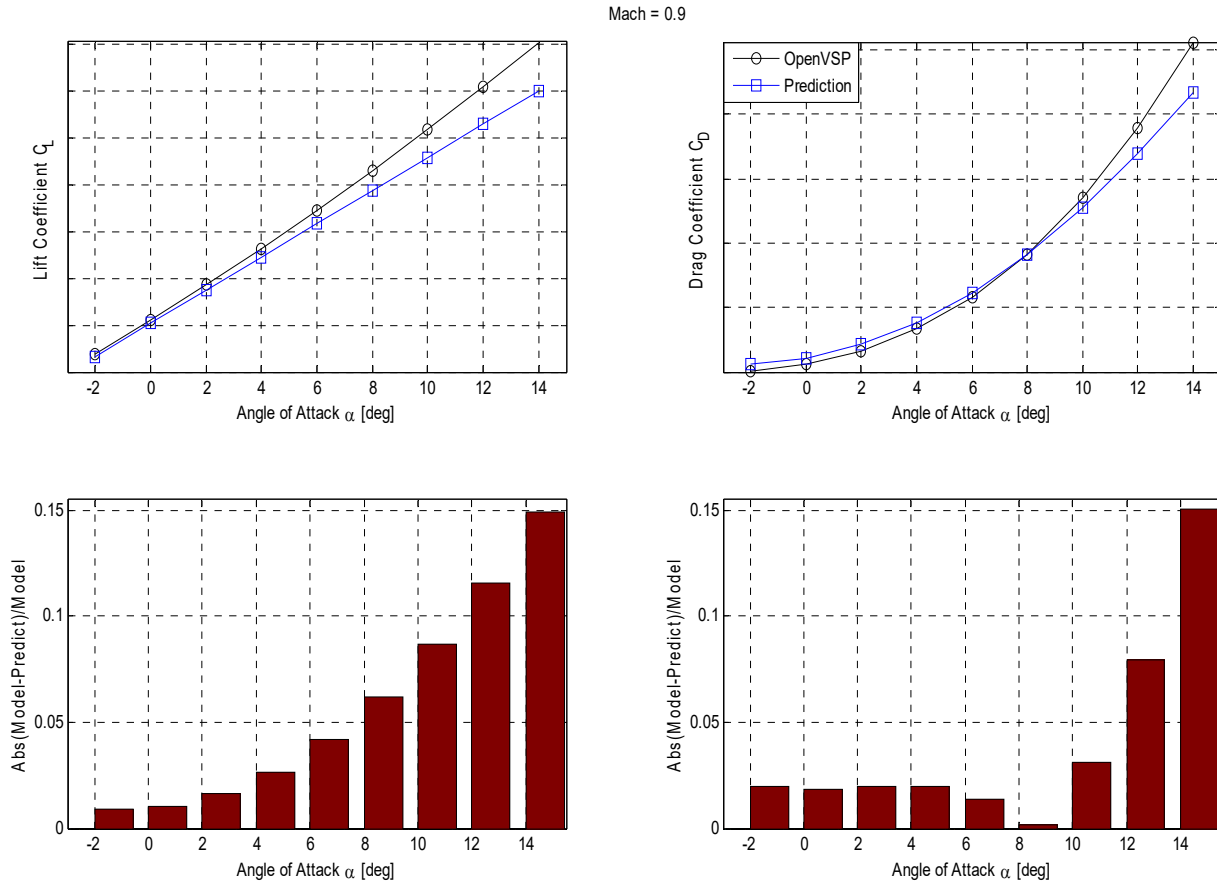


Fig. 8 Lift and drag coefficient comparison for Mach number equal to 0.9

#### IV. CONCLUSION

A computation time reduction was required for a pre-conceptual study using OpenVSP software. Some equations were established to reduce OpenVSP computation time for a complete study. Finally, aerodynamic coefficients were calculated for three computation combinations of: three angles of attack where one of them needs to be zero degrees and one Mach number equal to 0.2. From these three cases, all lift and drag coefficients for each angle of attack and Mach number can be predicted by the methodology detailed in this paper. As a conclusion, this method allows to reduce a complete study that takes around 20 minutes using OpenVSP to 90 seconds.

#### REFERENCES

- [1] C. Footprint. *Calculatrice du Bilan Carbone des Vols* Available: <http://calculator.carbonfootprint.com>
- [2] I. Secretariat, "Aviation's Contribution to Climate Change," *BAN Ki-Moon*, 2010.
- [3] A. Hamy, A. Murrieta-Mendoza, and R. Botez, "Flight Trajectory Optimization to Reduce Fuel Burn and Polluting Emissions using a Performance Database and Ant Colony Optimization Algorithm," 2016.
- [4] A. Murrieta Mendoza, C. Romain, and R. Botez, "3D reference trajectory optimization for a commercial aircraft using a graph search algorithm," 2016.
- [5] A. Murrieta-Mendoza, J. Gagné, and R. M. Botez, "GRIB2 weather extraction and use for flight optimization algorithms," in *Sustainability 2015-An International Conference on Environmental Sustainability in Air Vehicle Design and Operations of Helicopters and Airplane*, 2015.
- [6] A. Murrieta-Mendoza, J. Gagné, and R. M. Botez, "New search space reduction algorithm for vertical reference trajectory optimization," *INCAS Bulletin*, vol. 8, p. 77, 2016.
- [7] A. Murrieta-Mendoza, H. Ruiz, R. M. Botez, and T. Supérieure, "Vertical Reference Flight Trajectory Optimization with the Particle Swarm Optimisation," in *The 36th IASTED International Conference on Modelling, Identification and Control (MIC 2017)*. Innsbruck, Austria, 2017.
- [8] A. Murrieta-Mendoza, H. Ruiz, S. Kessaci, and R. M. Botez, "3D Reference Trajectory Optimization Using Particle Swarm Optimization," in *17th AIAA Aviation Technology, Integration, and Operations Conference*, 2017, p. 3435.
- [9] R. S. Félix Patrón, Y. Berrou, and R. M. Botez, "Climb, Cruise and Descent 3D Trajectory Optimization Algorithm for a Flight Management System," in *Aviation Technology, Integration, and Operations*, 2014.
- [10] R. S. Félix Patrón and R. M. Botez, "Flight trajectory optimization through genetic algorithms coupling vertical and lateral profiles," in *ASME 2014 International Mechanical Engineering Congress and Exposition*, 2014, pp. V001T01A048-V001T01A048.
- [11] R. S. Félix Patrón, A. Kessaci, and R. M. Botez, "Horizontal Flight Trajectories Optimization for Commercial Aircraft through a Flight Management System," *Aeronautical Journal*, vol. 118, 2014.
- [12] R. S. Félix Patrón, A. Kessaci, R. M. Botez, and D. Labour, "Flight trajectories optimization under the influence of winds using genetic algorithms," in *AIAA Guidance, Navigation, and Control (GNC) Conference*, 2013.
- [13] O. Ş. Gabor, A. Koreaschi, R. M. Botez, M. Mamou, and Y. Mebarki, "Analysis of the Aerodynamic Performance of a Morphing Wing-Tip Demonstrator Using a Novel Nonlinear Vortex Lattice Method," 2016.
- [14] A. Koreaschi, O. Ş. Gabor, T. Ayrault, R. M. Botez, M. Mamou, and Y. Mebarki, "Numerical Optimization and Experimental Testing of a Morphing Wing with Aileron System," in *24th AIAA/AHS Adaptive*

- Structures Conference*, 2016, p. 1083.
- [15] O. Gabor Sugar, A. Koreanschi, and R. M. Botez, "A New Non-Linear Vortex Lattice Method: Applications to Wing Aerodynamic Optimizations," *Chinese Journal of Aeronautics*, vol. 29, pp. 1178-1195, 2016.
- [16] J. Byrne, P. Cardiff, and A. Brabazon, "Evolving Parametric Aircraft Models for Design Exploration and Optimisation," *Neurocomputing*, vol. 142, pp. 39-47, 2014.
- [17] A. M. Gary and R. A. McDonald, "Parametric Identification of Surface Regions in OpenVSP for Improved Engineering Analysis," in *53rd AIAA Aerospace Sciences Meeting, American Institute of Aeronautics and Astronautics, Kissimmee, FL*, 2015, pp. 1-13.
- [18] J. R. Gloudemans and R. A. McDonald, "User Defined Components in the OpenVSP Parametric Geometry Tool," in *15th AIAA Aviation Technology, Integration, and Operations Conference, American Institute of Aeronautics and Astronautics, Dallas, TX*, 2015, pp. 1-7.
- [19] R. A. McDonald, "Interactive Reconstruction of 3D Models in the OpenVSP Parametric Geometry Tool," in *53rd AIAA Aerospace Sciences Meeting, American Institute of Aeronautics and Astronautics, Kissimmee, FL*, 2015, pp. 1-10.
- [20] R. M. Botez, C. Hamel, G. Ghazi, Y. Boughari, F. Theel, and A. Murrieta Mendoza, "Level D Research Aircraft Flight Simulator use for Novel Methodologies in Aircraft Modeling and Simulation," 2015.
- [21] M. Segui, M. Kuitche, R. M. Botez, and O. Sugar-Gabor, "Longitudinal aerodynamic coefficients of hydra technologies UAS-S4 from geometrical data," in *Proceedings of AIAA Modeling and Simulation Technologies Conference, AIAA SciTech Forum 2017*, 2017.
- [22] B. Etkin and L. D. Reid, *Dynamics of flight: stability and control* vol. 3: Wiley New York, 1996.