

Ethanol Yield of Three Varieties of Cassava (Odongbo, Ofege, and TMS 30572) Using α -Amylase from Germinated Paddy Rice and Yeast from Palm Wine

T. A. Abegunde, O. B. Oyewole, T. A. Sanni

Abstract—A process of conversion of flour from three varieties of cassava, namely Odongbo, ofege and TMS30752 to ethanol using α -amylase locally sourced from germinated unhusked paddy rice and yeast isolated from palm wine was developed. It involves the germination of paddy rice for a period of 15 days to produce α -amylase for starch hydrolysis and isolation of yeast from palm wine for fermentation. The results showed that optimum amylase yield of “ofada” rice paddy was at 6th day germination which was 576.9 ml/g. Ethanol yield for TMS30572 (440.3%) was significantly higher than “Odongbo” (160.2%) and “Ofege” (115.1%). Sugar conversion efficiency were 311.0%v/v, 268.2%v/v and 186.84%v/v for TMS30572, “Odongbo” and “Ofege” respectively. The ethanol boiling points were 78°C, 76°C and 80°C for TMS30572, “Odongbo” and “Ofege” respectively. This study showed that cassava varieties affects quality of ethanol produced and germination of “ofada” rice for 6 days ensures optimum production of crude amylase enzyme.

Keywords—Cassava, ethanol, fermentation, hydrolysis, α -amylase.

I. INTRODUCTION

THE energy security, declining oil reserves and climate change has in recent time led to seeking alternative fuel sources and principally from ethanol [1]. The raw materials used depend on the country and include cereals, tubers and sugar crops. Although the potential effects of producing fuel ethanol from food crops on food security have been highlighted and emphasis is now on the use of non-food crops, especially cellulosic materials [2]-[4]. Efficient production of biofuel from cellulosic materials requires complex methods and expensive enzymatic hydrolysis [5]. Reference [6] has opined that nonfood crop production may also compete with food crop for the available farm land thereby affecting food security. Many Nations of the world are considering the cassava as a cheap source of feedstock for biofuel production [7],[8].

Reference [9] reported on the production of ethanol from cassava whey while [10] and [11] noted that cassava peel and cassava waste residues can be used for the production of

ethanol. Several factors can help improve the profitability of ethanol process. These include development of high ethanol yielding cassava hybrid, better and lower cost enzymes etc. It is speculated that there is considerable variability within varieties for ethanol yield [5]. The current production technology involves the enzymatic hydrolysis of cassava flour to ethanol. In the processing, cassava flour was first cooked to gelatinization at a temperature of 80°C for 15 minutes in a water bath. The liquefied cassava flour was hydrolysed by α -amylase enzyme at 80°C and pH 6.2. The hydrolysed cassava flour was saccharified by amyloglucosidase enzyme at pH 4.2. The saccharified product was then fermented using a strain of *Saccharomyces cerevisiae* (yeast) at 30°C for 72 hours incubation. The fermented mash was distilled at 78°C to recover the ethanol produced [13]. Many of these technologies are not suitable in the rural areas of developing countries. Amylase can be produced by a host organism such as yeast, fungi and bacteria [14], [15]. However, purified enzymes are very expensive and not easily assessable in the developing countries. And this has continually kept the price of bio-fuel higher than fossil fuel. The cost of cassava is very cheap in the rural areas and if the cost of substrate can be brought to affordable level, ethanol production can be done in the rural areas and this can be used for powering bio-fuel electricity generator and excess sold off to generate additional income for the farmers. Reference [6] has exploited the use of rice grain as koji for the extraction of amylase enzyme from *Aspergillus amadori*. Germinated rice paddy is known to contain some endogeneous enzymes used for the production of Japanese rice wine [16]. The possible use of some local enzyme substrates, such as rice grains for the production of ethanol from cassava still need to be considered. This work was designed to produce ethanol from cassava flour from three different varieties using crude enzyme from germinated rice paddy liquefaction and saccharification, and yeast from palm wine for fermentation.

II. MATERIALS AND METHODS

A. Raw Materials

Cassava roots of three varieties (“Odongbo”, “Ofege” and TMS 30572) were obtained from the farm of the University of Agriculture, Abeokuta were used in this project. Rice paddy of the local “Ofada” rice in Abeokuta, Ogun State, Nigeria was used.

T.A. Abegunde is with Department of Food Technology, Lagos State Polytechnic, Ikorodu, and Lagos State Nigeria (phone: +2348038475830; e-mail: titilopebusola@yahoo.com).

O.B. Oyewole is with Department of Food Science and Technology, University of Agriculture Abeokuta, Ogun State Nigeria (e-mail: oyewoleb@yahoo.com)

T.A. Sanni is with the Department of Food Science and Technology, Federal University of Oye-Ekiti, Ekiti State Nigeria (e-mail: adelagun99@yahoo.com).

B. Methods

1. Alpha Amylase Production

The germination process followed the method of [22]; it involves the soaking of unparboiled paddy rice in clean water (600ml of water to 300g of paddy rice) for 24hours. The soaking water was drained off, the feeds were heaped to cone shape to generate heat (27°C) before been spread thinly on a shallow tray for different period (0, 3, 6, 9, 12 and 15 days). The germinated paddy rice was dried in the oven at 50°C for 10 to 14hours and then milled in mortar, to rice malt flour, which served as the crude enzyme source.

2. Determination of Amylase Yield in Rice Paddy (Ofada).

Rice malt 1g was dissolved in 10ml of extraction solution (1% Sodium Chloride, 0.02% Calcium Chloride and 0.02 % Sodium which was then made up to 100ml with distilled water) and left for 1h, the mixture was centrifuge at 1000G and enzyme supernatant was decanted. Absorbance of the resulting color solution was taken at 540nm wavelength against the blanks. The amount of Amylase yield was calculated using DNSA Reagent [16] from the formula below:

$$\text{Amylase yield (ml/g)} = \frac{\Delta A_{540}}{\text{Incubation time}} \times \frac{\text{Total Vol. in cell}}{\text{Aliquot assayed}} \times \frac{\text{Extraction}}{\text{sample wt}} \times \text{dilution factor}$$

Rice malt = 1g in 10ml extraction solution

Aliquot assay = 0.1ml

Incubation time = 10min

Extract Vol. = 10ml

Sample wt = 1 gm

Total vol. in cell = 23ml.

3. Hydrolysis of Cassava Flours and Ethanol Production

The sixth day germinated rice malt was used in this work as crude α -amylase, as it was found to have the highest α -amylase yield see Fig 1. Crude α -amylase (16gram) and 100gram cassava flour was processed to ethanol in 400ml of distilled water. The cassava flour was mixed with hot water at temperature 73°C to give a final mash temperature of about 68°C during which the viscosity of the cassava flour increases [15], cassava gel was finally formed at 65°C, the starch level, sugar Brix and the sugar level was measured, during the hydrolysis. 20ml of yeast inoculate were inoculated into 400ml (pH 5.0) sterile glucose syrups ("Odongbo", "Ofege" and TMS30572) in 500ml conical flasks and were incubated on a Gyrotory Shaker (100rpm) for one day, followed by 3 days on stationary incubation at 30°C. The pH, specific gravity, sugar content, ethanol content and TTA were monitored daily.

C. Analytical Methods

Starch concentrations were determined by iodometric method of AOAC 1990. Glucose assay was done using the DNSA method of [4]. The pH was measured using Jenway pH meter (Model 3015, serial No. 1647, UK).

Refratometer was used to measure the Brix, while Total acidity was determined by titration method. Total reducing sugar was measure by the method of [17]. Ethanol Yield (%)

w/v) was estimated according to [11]

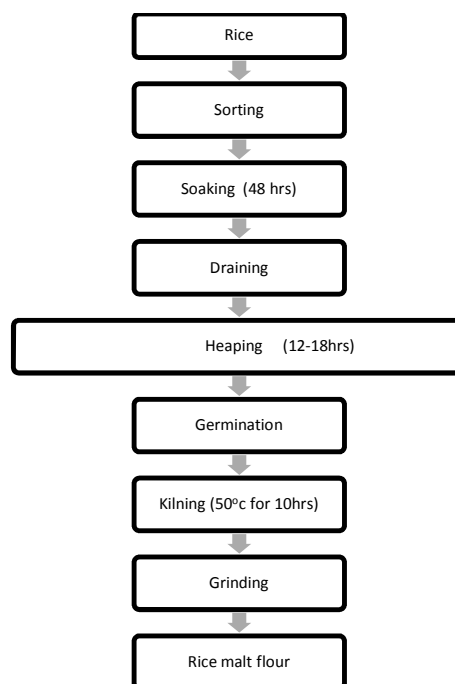


Fig. 1 Production of Rice Malt Flour

Thus:

$$\text{Ethanol yield} = \frac{\text{Ethanol produced}}{\text{Sugar consumed}} \times 100$$

Sugar conversion efficiency was calculated by % media sugar content at the start and the total amount of alcohol produced. [18].

$$\text{SCE} = \frac{\text{Percentage alcohol (w/v)}}{\text{Sugar content at the start}} \times 100$$

$$\text{SCE} = \frac{w}{v} \times \frac{100}{0.504}$$

where:

0.504= Conversion efficiency factor.

1. Sugar Consumed

Is calculated by subtracting the initial sugar during hydrolyzes from sugar after fermentation.

Sugar consumed = Initial sugar – sugar after fermentation.

2. Fermentation efficiency:

This is calculated by % media sugar content at the start and the sugar consumed.

III. RESULT AND DISCUSSION

A. Paddy Rice Germination (Enzymes Source)

The rice grain contains many endogenous enzymes, and it is

smaller to other cereal grains, relatives to the biosynthesis of the major seed components (Starch, protein and liquid). The germination process is as illustrated in Fig. 1. The paddy rice used in this work was yet to be subjected to parboiling or other processing. The paddy rice was cleaned and soaked in clean water (600ml of water to 300g of paddy rice) for 24hours. The soaking water was drained off, the feeds are first heaped to cone shape to generate heat (27°C) before been spread thinly on a shallow tray for different period (0, 3, 6, 9, 12 and 15 days). Thus some enzymatic changes occurred that affect the quality [18]. After the germination, the germinated paddy rice was dried in the oven at 50°C for 10 to 14hours and then milled in mortar, to rice malt flour, which served as the crude enzyme source.

B. Yield of α -Amylase from Ofada Rice Paddy

The amylase yield of the ofada rice paddy germination is presented in Fig. 2. The enzyme yield gave varying amylase (ml/g) at intervals of 3 days to 15 days. The results showed that the α -amylase yield increased from day 1 (3.12ml/g) and got to the peak (the optimum yield) at day 6 (576.9ml/g), which indicated that the germination process is very necessary to yield amylase. Amylase is without doubt the most important enzyme in malt. They are responsible for degradation of starch during mashing. The trend in the increase of α -amylase in this study agrees with the report of [19] who suggested that 7 days germination would be the optimum for α -amylase yield in plant product.

C. Changes in Slurry Parameters during Hydrolysis

The changes occurring during hydrolysis of the three varieties of cassava flour are presented in Table I. The pH and starch decreased with time while Brix and sugar level increased at an hour interval for seven hours. At the end of 7 hours of the starch hydrolysis, the pH of TMS30572 stood at 5.00±0.12, significantly higher than that of Ofege and Odongbo, indicating that TMS30572 is more resistant to pH change than the other varieties.

The level of starch content in the slurry also reduced significantly during the seven hours of hydrolysis, indicative of effective convention of starch to glucose syrup. Ofege variety had the lowest level of starch at the end hydrolysis period, suggesting that the starch granules of the variety are more susceptible to α -amylase degradation than the two other varieties. As it may be expected the sugar content and the Brix increased as the period of hydrolysis increased. The starches in the flours were successfully hydrolysed as revealed by the level of starch content that remained after the period of hydrolysis. Meanwhile, [8] reported that no starch remained after the hydrolysis of yam and cocoyam flours with a combine effect of α -amylase and glucoamylase enzymes. This observed deference might be because; only amylase from rice paddy was used for both hydrolysis and saccharification. And the result nonetheless showed that the flours were not resistant to the α -amylase derivable from locally available Ofada rice paddy.

The high convertible starch content of this cassava flour

will produce more fermentable sugar and therefore more alcohol.

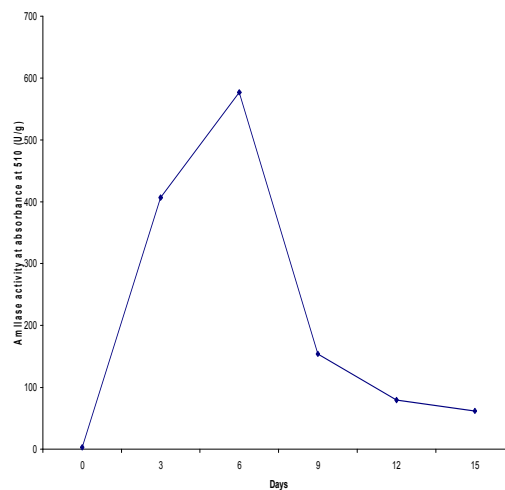


Fig. 2 Amylase yield of Rice

D. Changes in Hydrolysate Parameter during Fermentation

The changes in hydrolysed cassava in flour fermentation at 30°C for 4 days shows that; there was consistent decrease in the pH level of all samples from day 1 to day 4 (Table II). The reduction of pH indicates an increase in acidity of the samples fermented (4.40 to 3.80 for odongbo; 4.60 to 3.85 for Ofege; and 5.00 to 3.99 for TMS30572).

TABLE I
CHANGES IN SLURRY PARAMETERS DURING HYDROLYSIS

Parameter	Time (hrs)	Odongbo	Ofege	TMS 30752
pH	1	5.63±0.02 ^{ay}	6.38±0.02 ^{ax}	5.52±0.02 ^{az}
	2	5.46±0.03 ^{bz}	6.41±0.02 ^{ax}	5.51±0.02 ^{ay}
	3	5.26±0.01 ^{cz}	6.01±0.02 ^{bx}	5.41±0.01 ^{by}
	4	5.10±0.02 ^{dz}	5.75±0.03 ^{cx}	5.32±0.02 ^{cy}
	5	5.01±0.01 ^{ez}	5.42±0.03 ^{dx}	5.25±0.03 ^{dy}
	6	4.85±0.03 ^{ez}	5.02±0.02 ^{ex}	5.08±0.02 ^{ey}
	7	4.55±0.05 ^{ez}	4.83±0.02 ^{fy}	5.21±0.02 ^{dx}
Starch	1	4.42±0.03 ^{hz}	4.61±0.02 ^{sy}	5.00±0.03 ^{fx}
	2	0.74±0.03 ^{ax}	0.76±0.01 ^{ax}	0.73±0.01 ^{ax}
	3	0.57±0.02 ^{by}	0.63±0.02 ^{bx}	0.55±0.02 ^{by}
	4	0.38±0.03 ^{cy}	0.34±0.02 ^{cz}	0.46±0.02 ^{cx}
	5	0.28±0.04 ^{dy}	0.22±0.03 ^{dz}	0.39±0.02 ^{dx}
	6	0.12±0.03 ^{ey}	0.10±0.02 ^{ey}	0.26±0.02 ^{ex}
	7	0.08±0.01 ^{fy}	0.07±0.02 ^{fy}	0.12±0.02 ^{fx}
Sugar	1	0.07±0.02 ^{fy}	0.05±0.01 ^{fy}	0.10±0.01 ^{fx}
	2	0.16±0.02 ^{fy}	0.18±0.01 ^{ex}	0.09±0.02 ^{fx}
	3	0.03±0.02 ^{sy}	0.26±0.03 ^{fx}	0.26±0.02 ^{ex}
	4	0.45±0.01 ^{ez}	0.39±0.04 ^{sy}	0.42±0.02 ^{dx}
	5	0.51±0.01 ^{dx}	0.48±0.02 ^{dy}	0.44±0.01 ^{dz}
	6	0.67±0.02 ^{ex}	0.63±0.02 ^{ex}	0.57±0.01 ^{cz}
	7	0.74±0.02 ^{bx}	0.71±0.02 ^{by}	0.71±0.02 ^{by}
Sugar brix	1	0.79±0.03 ^{ax}	0.76±0.01 ^{sy}	0.78±0.02 ^{ax}
	2	2.51±0.06 ^{ex}	2.02±0.03 ^{sy}	2.05±0.09 ^{sy}
	3	8.05±0.05 ^{fx}	4.05±0.05 ^{fx}	5.05±0.05 ^{fy}
	4	12.05±0.05 ^{ex}	8.05±0.05 ^{ez}	9.03±0.03 ^{sy}
	5	17.03±0.10 ^{dx}	13.05±0.10 ^{dy}	12.05±0.05 ^{dz}
	6	20.05±0.05 ^{cx}	17.13±0.13 ^{cy}	17.05±0.05 ^{cy}
	7	22.03±0.06 ^{bx}	20.05±0.05 ^{by}	23.05±0.18 ^{bx}
7	24.07±0.08 ^{ax}	22.10±0.13 ^{ay}	25.02±0.03 ^{ax}	

a,b,c,d,e: Means down the same column with same superscripts are not significant (P>0.05)

x,y,z: Means along the same row with same superscripts are not significant (P>0.05)

Yeasts are also found in some fermented foods. Yeast are known to produce acids such as acetic, pyruvic, propionic and butyric during fermentation [22]. Hence, the reduction in the pH of the fermenting medium, the total sugar increased in all varieties for the first 36 hours from 0.48 to 2.18 in Odongbo; 0.49 to 2.29 in Ofege and 0.73 to 3.13 in TMS30752, and a general decline to 0.91, 1.04 and 0.89 respectively for Odongbo, Ofege and TMS30752 at the 96th hour. This trend seems to balance between the two contradictory views of researchers on the performance of sugar during fermentation of hydrolysed starch.

TABLE II
CHANGES IN SLURRY PARAMETERS DURING FERMENTATION

Parameter	Time (hrs)	Odongbo	Ofege	TMS 30752
pH	0	4.44±0.04 ^{az}	4.62±0.23 ^{ay}	5.02±0.02 ^{bx}
	24	4.24±0.04 ^{by}	4.23±0.03 ^{by}	5.52±0.03 ^{ax}
	48	4.12±0.03 ^{cx}	4.03±0.04 ^{cy}	4.13±0.03 ^{cx}
	72	3.93±0.02 ^{dy}	3.91±0.02 ^{dy}	4.15±0.04 ^{cx}
	96	3.83±0.03 ^{ey}	3.85±0.03 ^{ey}	3.96±0.03 ^{dx}
Sugar	0	0.48±0.03 ^{dy}	0.49±0.02 ^{dy}	0.73±0.03 ^{dx}
	24	0.34±0.02 ^{ey}	0.32±0.03 ^{ey}	0.45±0.03 ^{cx}
	48	2.18±0.04 ^{az}	2.27±0.02 ^{ay}	3.14±0.04 ^{ax}
	72	1.25±0.03 ^{bz}	1.46±0.03 ^{by}	1.73±0.03 ^{bx}
	96	0.91±0.02 ^{cz}	1.04±0.02 ^{cy}	1.39±0.04 ^{cx}
Sugar brix	0	24.03±0.50 ^{ax}	22.00±0.25 ^{ay}	25.13±0.12 ^{ax}
	24	17.08±0.53 ^{bxy}	16.07±0.08 ^{by}	18.00±0.10 ^{bx}
	48	12.32±0.38 ^{cx}	9.10±0.13 ^{cz}	11.06±0.08 ^{cy}
	72	6.03±0.45 ^{dx}	3.13±0.12 ^{dy}	6.03±0.50 ^{dx}
	96	3.00±0.35 ^{ey}	1.08±0.78 ^{ez}	4.05±0.05 ^{ex}
Total acidity	0	0.09±0.01 ^{by}	0.07±0.01 ^{exy}	0.05±0.02 ^{dx}
	24	0.21±0.08 ^{ax}	0.12±0.01 ^{dy}	0.12±0.02 ^{ey}
	48	0.22±0.01 ^{ax}	0.19±0.02 ^{cy}	0.18±0.01 ^{by}
	72	0.22±0.01 ^{ax}	0.22±0.01 ^{bx}	0.22±0.01 ^{ax}
	96	0.24±0.22 ^{ax}	0.25±0.02 ^{ax}	0.22±0.01 ^{ay}

Reference [23] postulated that there would be increase in the level of reducing sugars and total sugars, however, some studies showed the opposite, that is a decrease in reducing sugar [24], and total sugars [25]. The cell growth of the slurry as fermentation progresses is presented in Fig.2. Cell growth of the slurry as fermentation progresses is presented in Fig .2. At the end of the 4th day the cell growth of TMS30752 was significantly higher than that of Odongbo and Ofege. The reason for this is not presently clear, as there was nothing that warranted this phenomenon in constituent of the said variety. The increase in cell growth confirms high activity of yeast and the suitability of the medium to support yeast activity. Reference [21] opinioned that sluggish yeast growth will cause delay in fermentation and give room for infection which may reduce alcohol yield.

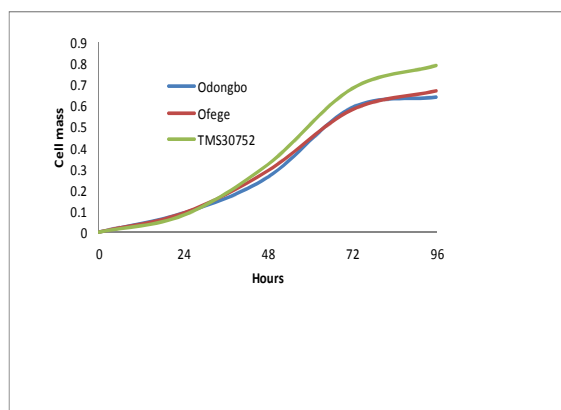


Fig. 3 Changes in cell growth of *Saccharomyces cerevisiae* from palmwine using various hydrolysates during fermentation

The changes in ethanol content and ethanol yield as against the quantity of sugar consumed during fermentation are presented in Table III. The quantity of ethanol produced by TMS30572 (39.19w/v) was significantly ($p<0.05$) higher than both Ofege and Odongbo. The quantity of sugar consumed in the course of fermentation also shows that TMS30572 has the highest yield of ethanol 440% as against 122.6%. The level of ethanol yield in all of the three varieties notwithstanding was higher than the yield from cocoyam and yam flour used for ethanol production [2]. The specific gravity of the ethanol was in the range of acceptable level of pure ethanol, while the color of the ethanol colorless and devoid of residue. Ethanol production from cassava is an old technology that has been effectively researched and has been already implemented for production of ethanol at a commercial level in many industrialized nations. Meanwhile, in many emerging economies, commercial production of ethanol as bio-fuel is not economical and competitive, due to the technologies and ingredients involved. The use of locally sourced enzymes and improved cassava hybrid like TMS30572 that are readily available to rural farmers as is being revealed by this study, will not only make the production of ethanol a practicable ventures by rural farmers, but will also make ethanol abundance through the pull from many small scale farmers to a central rectification facility.

TABLE III
PARAMETERS ON ETHANOL PRODUCED AT DAY 6 OF GERMINATION

Characteristics	"Odongbo"	"Ofege"	TMS30752
Sugar consumed (mg/ml)	20.26	18.00	8.90
Sugar conversion efficiency %	268.2	186.84	311.0
Fermentation efficiency at 4 day (%)	95.70	94.54	90.91
Ethanol produced	32.45wlv	23.30wlv	39.19w/v
Ethanol yield (%)	160.2	115.1	440.3
Specific Gravity (kg/l)	0.9572	0.9696	0.9465
% Alcohol (w/v)	32.45	23.30	39.19
Boiling pt (°C)	76	80	78
Sugar at 20°C % Sucrose	10.8	6	7.9
Refractive Index at 20°	1.3495	1.3420	1.3445
Color	colorless	colorless	colorless
Residue	NiL	NiL	NiL

IV. CONCLUSION

In this work, we have been able to describe a system where locally sourced enzymes from germinated paddy rice and yeast isolated from palm wine could give a high yield of ethanol from three varieties of cassava. The study also shows that, apart from the enzyme from the germinated rice, no additional enzyme is required before the hydrolyzed starches are fermented to ethanol, hence reducing the overall cost of production.

ACKNOWLEDGEMENT

One of the authors wish to acknowledge with thanks the support contributed by Association of African Universities (AAU) through the "Small Grant for Theses and Dissertation"

STATEMENT OF COMPETING INTEREST

The authors have no competing interest

REFERENCES

- [1] Ziska L. H., Runion G. B., Tomecek M., Prior S. A., Torbet H. A. and Sicher R.(2009).An evaluation of cassava, sweet potato and field corn as potential carbohydrate sources for bioethanol production in Alabama and Maryland. *Biomass and Bioenergy*. 33:1503-1508.
- [2] Saha B.C., Iten L.B., Cotta M.A. and Wu Y.V.(2005) Dilute acid pretreatment, enzymatic saccharification and fermentation of wheat straw to ethanol. *ProcBiochem*40:3693-3700.
- [3] Nigam J.N.(2001)Ethanol production from wheat straw hemicellulose hydrolysate by *Pichia stipitis*. *J Biotechnol*87:17-27.
- [4] Miller, G.L., W.E. Glennon and A.L. Burton, (1960). Measurement of Carboxymethyl cellulase activity, *Anal. Biochem.*, 2: 127 - 132.
- [5] Suryawati L., Wilkins M.R., Bellmer D.D., Huhnke R.L., Maness N.O. and Banat I.M. (2009). Effect of hydrothermolysis process conditions on pretreated switchgrass composition and ethanol yield by SSF with *Kluyveromyces marxianus* IMB4. *ProcBiochem*. 44:540-545.
- [6] Ogbonna C.N. and Okoli E.C. (2010) Conversion of cassava flour to fuel by sequential solid state and submerged cultures. *Process Biochemistry*. 45 1196-1200.
- [7] Cardona C. A. and Sanchez O. (2007) Fuel ethanol production: process design trends and integration opportunities. *Bioresource Technol*; 98:2415-242.
- [8] Shetty J. k., Chotani G., Duan G. and Bates D.(2007) Cassava as an alternative feedstock in the production of transportation fuel. *Int Sugar J* 109:3-11.
- [9] Akpan, I., Ikenebomeh, M.J. Urah, N., Obuekwe, C.O. (1988) Production of Ethanol from Cassava whey. *Acta Biotechnol*. 8: 1, 39- 45.
- [10] Anyakorah, C. I., Ekunsanmi, T.J and Kumboye, A.O. (1998) Ethanol production from cassava peels. *Proceeding of NSM* 1:14 -17.
- [11] AOAC (1990) Official Methods of Analysis, Association of Official Agricultural Chemists Washington. D.
- [12] Gilliland, R.B.(1981). Brewing yeast. In *Brewing Science*, Vol. 11 pp 1 - 60. Edited by J. R. A. Pollock, London: Academic Press.
- [13] Athasampunna, P. Somchai, A. Eur-aree and S.Jariyasripong. (1987). Production of fuel ethanol from cassava. *MIRCEN Journal*, 3, 135-142.
- [14] Couri S, Terzi SC, Pinto SG, Freita SP, Costa AC. (2000). Hydrolytic enzyme production in solid state fermentation by *Aspergillus niger* 3T5B8. *Process Biochem* 36:255-261.
- [15] Verma G., Nigam P., Singh D. and Chaudhary K.(2000) Bio-conversion of starch to ethanol in a single step process by co-culture of amyolytic yeasts and *Saccharomyces cerevisiae*. *Bioresource Technol*. 72:261-266.
- [16] Yoshizawa, K. and Kishi, S. (1985). Rice in brewing. In B.O Juliano, ed. *Rice Chemistry and technology*, 2nd ed, P, 619 - 645, 57 Paul, MN, USA, Am. Assoc. Cereal Chemistry.
- [17] Bainfield, P. (1955). *Methods in Enzymology*. 1: 149 - 158.
- [18] De Mancillia, I.M. and Pearson, A.M. (1984). Increasing alcohol yield of selected yeast fermentation of sweet sorghum. *Evaluation of yeast strains for ethanol production. Biotech. and Bioeng.* 26, 672-675.
- [19] Bhattacharya, K.R. (1985), Parboiling of rice - In B.O. Juliano, ed. *Rice Chemistry and Technology*, 2nd ed, p. 289-348 St. Paul, M.N. U.S.A, *Am. J. Bot*, 65; 684-691.
- [20] Townsend Allan (1995). *Encyclopedia of Analytical Science* Chinfla Academic press New York vol.2 pg 939-1228.
- [21] Osuji C.M., Nwanekezi E.C. Amadi E.M. and Osuji C.A. (2010) Yield of ethanol from enzyme-hydrolyzed yam (*Dioscorea rotunda*) and cocoyam (*Xanthosomasagittifolium*) flours. *Nigerian Food Journal* 28 (2) 139-145.
- [22] Kazanas, N., Field M.L.(1981). Nutritional improvement of sorghum by fermentation. *J. Food Sci.* 46: 819 - 821.
- [23] Lynd L. E. (1996) Overview and evaluation of fuel ethanol from cellulosic biomass: technology, economics, the environment and policy. *Ann Rev Energy Environ* 21:403-65.
- [24] Taur, A. T, Sarkar, P.K and Hesseltime, C.W, (1984). Nutritional improvement of grainsorghum by germination. *The Indian Journal of Nutrition and Dietetics*. Vol 21 :168 - 173.
- [25] EL - Tinay, A.H., A.M. Abdel Gader and M. El Hidai, (1979). Sorghum fermented kiswa bread. I. Nutritive value of kiswa. *J.sci. food and Agric*, 30:859-863.