

Evaluation of Context Information for Intermittent Networks

S. Balaji, E. Golden Julie, Y. Harold Robinson

Abstract—The context aware adaptive routing protocol is presented for unicast communication in intermittently connected mobile ad hoc networks (MANETs). The selection of the node is done by the Kalman filter prediction theory and it also makes use of utility functions. The context aware adaptive routing is defined by spray and wait technique, but the time consumption in delivering the message is too high and also the resource wastage is more. In this paper, we describe the spray and focus routing scheme for avoiding the existing problems.

Keywords—Context aware adaptive routing, Kalman filter prediction, spray and wait, spray and focus, intermittent networks.

I. INTRODUCTION

DELAY Tolerant Networks have been used to send the routing messages in the partitioned networks [10], [42]. Ad Hoc Networks assume that a connected path exists between sender and receiver node at any point in time [12]. Context is the set of attributes related to the host. Adaptive routing is the capability of a system to change in condition [11]. Wang et al. confirmed that nodes which are not in the entrant list may also be helpful, as far as they snoop into the data packet and have confident geographical advancement on the way to the destination [25]. Boldrini et al. implemented an inherent context-aware middleware to conjecture possible mobility to assist routing packets in opportunistic networks [26]. A hypercube social feature extraction based routing is another kind of multipath routing used in networks [27].

Opportunistic Routing is a motivating development of the conventional MANET. The major supposition of the conventional mobile system is that the dispatcher and the recipient can be present concurrently [19]. If the dispatcher wants to broadcast data, but it cannot attach to the target throughout a multi-hop path, the data will be plunged [13]. However, the routing aims to swap the communication between disjointed nodes by persistently choosing some nodes to relocate data closer to the objective [14]. To maintain this objective, a quantity of innovative routing protocols should be re-modified inexorably. Essentially, the plan of routing protocol is a significant aspect of the opportunistic routing. Evaluated conventional routing protocol in MANETs [16], the

innovative routing protocol has not attained a considerable dependable routing path among the sender and the receiver in opportunistic routing using Collaborative Watchdog with fuzzy logic approach [21]. Furthermore, requirement of the topological data restrain the construction of the efficient protocol. The main familiar method is the controlled overflow among the inadequate time to live (TTL). It can transmit the data to the target as soon as one node gets a forward link. Preoccupied from the technique of flood, multi-copy is a more proficient methodology [20]. Considering the nonexistence of the particular data, the alternate path in opportunistic routing is developed by using the dynamic clustering technique [22].

Spray and wait is based on the initial replication of a certain number of copies of the message. Then these copies are not replicated further and are only forwarded to the recipient of the message [39]. Context aware adaptive routing is used in the intermittent connected network [1]. Fuzzy based load balancing technique is used to find the best forwarded node in the network [15]. Context is any data that can be developed to illustrate the position of a node in the network [17]. Tree based network formation is the alteration for the context aware adaptive routing protocol [18].

To address the above issues, we present a protocol: Context-aware Opportunistic Routing (COR). COR allows all qualified nodes to participate in packet forwarding [23]. Energy based clustering formation using opportunistic routing [24] is presented for improving Quality of Service.

MANETs are categorized by dynamic node selection, incomplete bandwidth and restricted energy of their dynamic nodes. Bio/Nature-inspired routing algorithms (Swarm Intelligence) such as BeeAdHoc have been obtainable for developing routing algorithms for MANETs [34]. The dissimilar performances of this network are disseminated between the nodes and every other node will perform the responsibility of a router for the packets intended for the other nodes [36]. The system functionality of MANETs can change recurrently, since every node is intelligent to progress separately in several directions [35]. A Fuzzy set can include elements through only a biased quantity of membership. A membership function (MF) is a curvature that describes how every direct in the contribution space is mapped to a membership cost between 0 and 1. If-then rule declarations are employed to originate the provisional statements that encompass fuzzy logic [37]. The fuzzy methodology necessitates adequate expert information for the generation of the rule base, the permutation of the information and the defuzzification. In common, the affecting of fuzzy logic can be cooperative, for extremely composite procedures, when

Balaji S. is an Associate Professor, Department of Computer Science and Engineering, Francis Xavier Engineering College, India (e-mail: sbalajiphd@gmail.com).

Golden Julie is an Assistant Professor, Department of Computer Science and Engineering, Anna University, Chennai, India (e-mail: goldenjuliephd@gmail.com).

Harold Robinson Y. is an Associate Professor, Department of Computer Science and Engineering, SCAD College of Engineering and Technology, India (e-mail: yhrobinphd@gmail.com).

there is no straightforward mathematical representation, for extremely nonlinear procedures or if the procedure of expert knowledge is to be executed [38]. Stochastic routing is a method that can be utilized to find the next hop in a path concurrence to a probability allocation [40].

II. RELATED WORK

The messages contained in the nodes are blindly stored and forwarded to the node that lies in the range of that particular node. It is based on the periodic pairwise connectivity of nodes. The advantage of this method is that it ensures high delivery rates and also because of limited buffer space, there may occur the dropping of messages and retransmissions [1]. A probabilistic metric is called delivery predictability for indicating the predicted path. Here the disadvantage is the problem of deciding and the distribution of messages to the number of nodes [2]. Securing Immutable Tracking system can be used to ensure the security in MANETs [3]. The Sparse MANETs are meant that they need the network partitions for a significant period of data delivery. Here the straight forward approach is followed [6]. In this approach, the data delivery rates are low and it has large delays [4]. The asynchronous communication for message delivery is used. Prediction of context information is utilized in the Kalman filter prediction technique and utility theory. Context Aware Routing performs respectable message delivery even without message replication [9]. The disadvantage of this methodology is that there is no acknowledgement mechanism in order to notify the sender about the correct delivery of messages [5]. Spray and wait has two phases; Spray phase: Source node spreads L copies of messages to other node. Here only the initial replication of a certain number of the messages will occur. Wait phase: The source node will wait until the message has been sent to the other node. The disadvantage is spraying the number of copies consumes much time and resources [7]. Context aware adaptive routing is meant for communication in intermittently connected networks. Here, Kalman filter and the multi-criteria decision theory are used. These predictions are then composed using multi-criteria decision theory. Here the spray and wait is indirectly used in asynchronous communication of message delivery [8]. Due to this, the transparency for finding novel route from source to destination may be elevated and additional wait for latest route discovery may be introduced and data broadcast becomes delayed [28], [29]. Scheduling algorithm may use the bandwidth delay aware protocol for improving the Quality of Service [30]. Energy efficiency is the prime factor for improving the network management [32], geographical approach can be implemented to improve the scalability [31]. Dominating set cluster formation [33] is used to increase the network capacity. The Ad-Hoc broadcast protocol (AHBP) [41] creates multi-hop neighborhood information to choose the most competent subset of downstream nodes that should retransmit, so that all nodes in its multi-hop neighborhood are sheltered.

III. PROPOSED SYSTEM

In this work, we will use the Spray and Focus Routing Technique through the Kalman Filter and the Utility functions. Here it enters the spray phase first then enters the focusing phase. It sprays L copies to L relays and in the route each copy using a single copy utility based scheme.

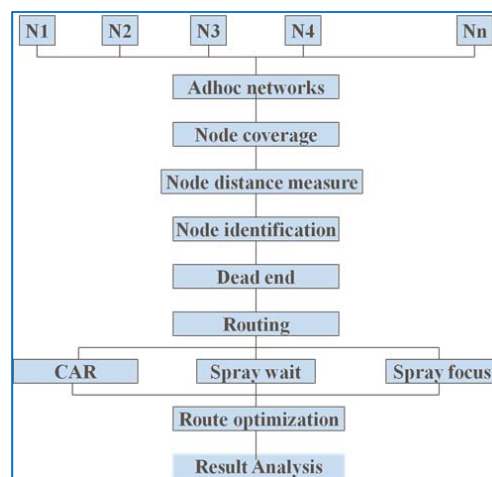


Fig. 1 Proposed Work

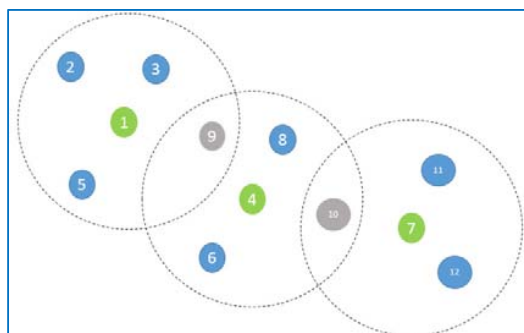


Fig. 2 Node Creation

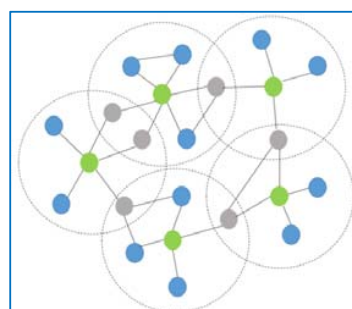


Fig. 3 Node Formation with Clusters

A. Node Arrangement

It allows mobile hosts to communicate with one another with no pre-existing communication infrastructure. In ad hoc networks, arbitrary mobile hosts can be recruited to “fill the gap” by serving as intermediate routes between two hosts that may otherwise not be in direct transmission range of one

another. Random node arrangement is the process of the selected number of nodes which are randomly placed in the network.

B. Node Coverage

It defines the node's individual coverage capacity. In that

range, the neighboring node can be interacted for the message transferring purposes. The coverage of each node will be generated which represents the transmission power (range) of each node.

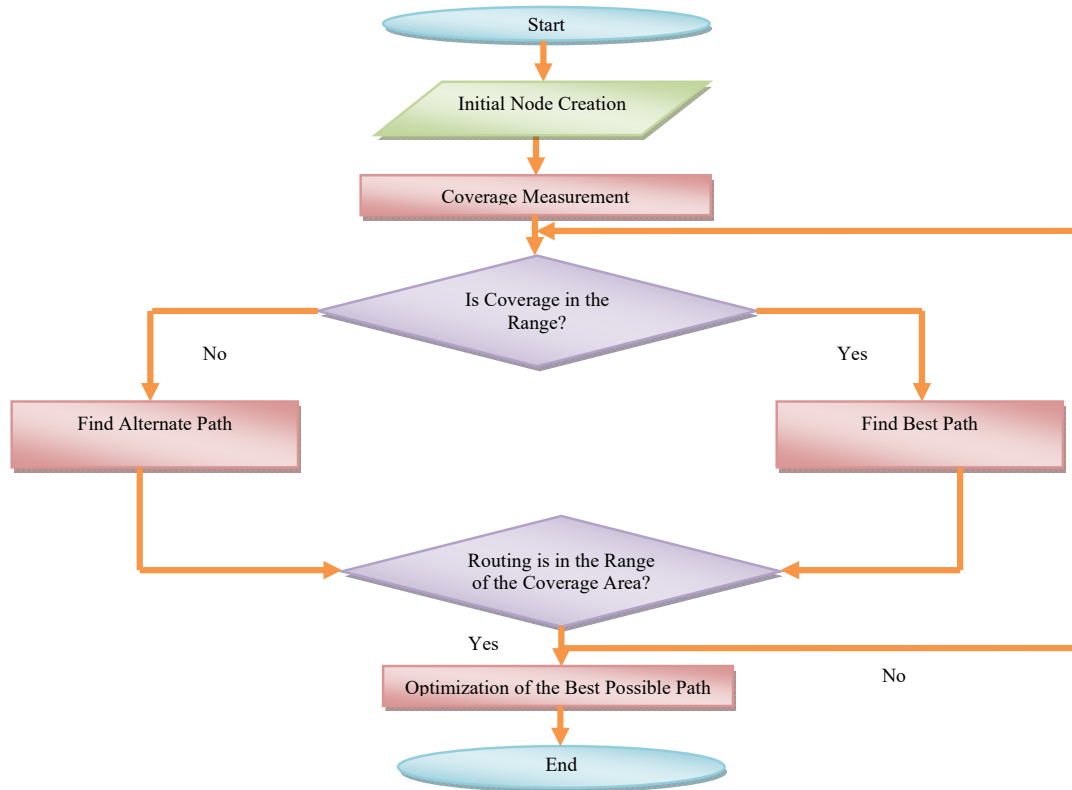


Fig. 4 Flowchart for the proposed scheme

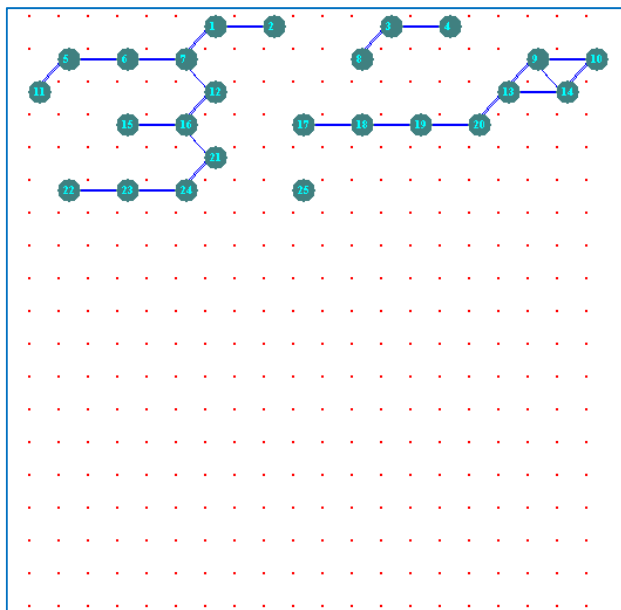


Fig. 5 Nodes Hop Distance

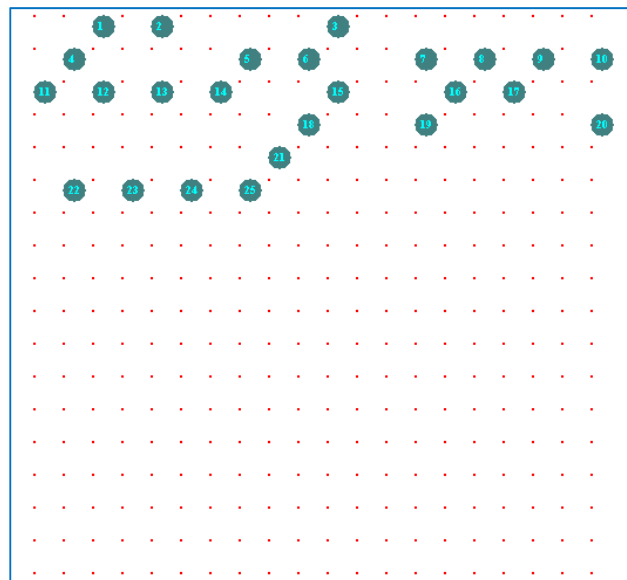


Fig. 6 Nodes Arrangement

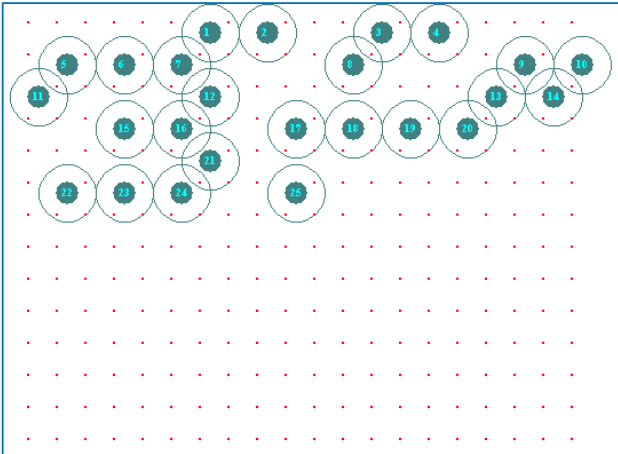


Fig. 7 Node Coverage

IV. CONTEXT AWARE ADAPTIVE ROUTING

Context aware adaptive routing is used for the delay tolerant unicast communication in intermittently connected MANETs. It uses prediction to allow the efficient routing of messages to the recipient. Context aware adaptive routing does not assume any previous knowledge of the routes of the hosts. It is based on a single copy of message in the system. Under context aware routing, we can use the following techniques:

- Spray and Wait
- Spray and Focus

The source and the destination node may lie on the same cloud or different clouds.

A. Node Performance

The performance of the node is considered by the change degree of connectivity and the past collocation of the nodes here these are fed as the input to the Kalman filter. The output of this filter is composed using multi-criteria decision theory to give the overall performance. The change of degree of connectivity is calculated as:

$$U_{cdc_h}(t) = \frac{|n(t-T) \cup n(t)| - |n(t-T) \cap n(t)|}{|n(t-T) \cup n(t)|} \quad (1)$$

$$Time_{Avg}(NR) = \sum_{i=1}^n \left(\frac{FwdN(\frac{n_i+1}{n_i})}{n} \right) \quad (2)$$

where n is the hop distance number and FwdN is the Forward Node for broadcasting data packet, which is calculated as $n_i + 1$ by n_i .

$$Time_{Avg}(ER) = \sum_{i=1}^N \left(\frac{AdjN(\frac{n_i+1}{n_i})}{N} \right) \quad (3)$$

where n is the hop distance number and AdjN is the Adjacent Node for broadcasting data packet, which is calculated as $n_i + 1$ by n_i .

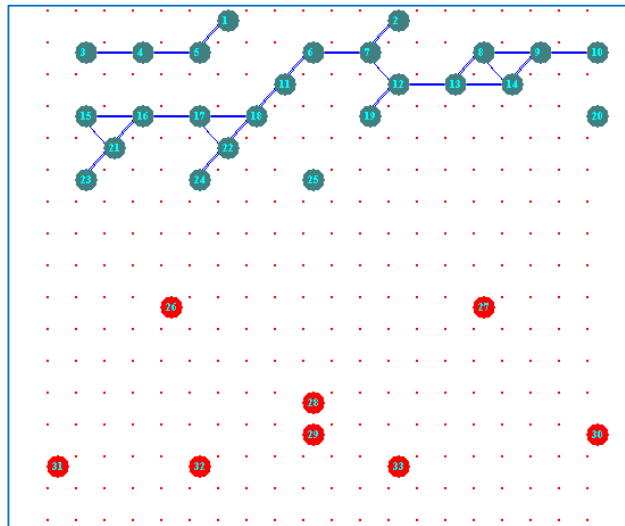


Fig. 8 Dead End Node

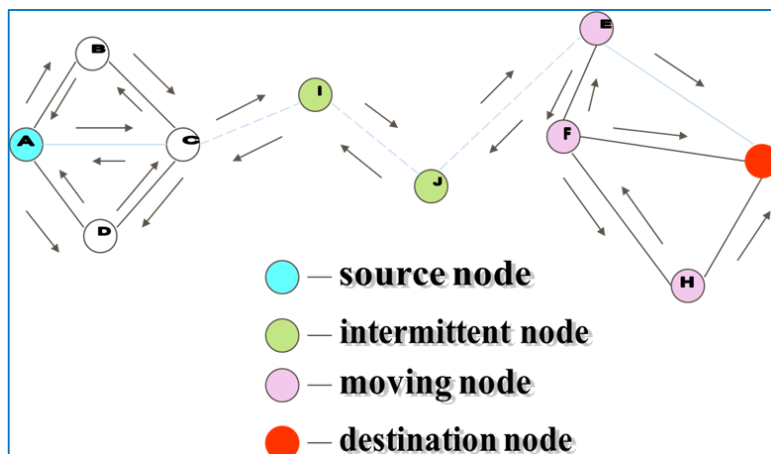


Fig. 9 Network Model

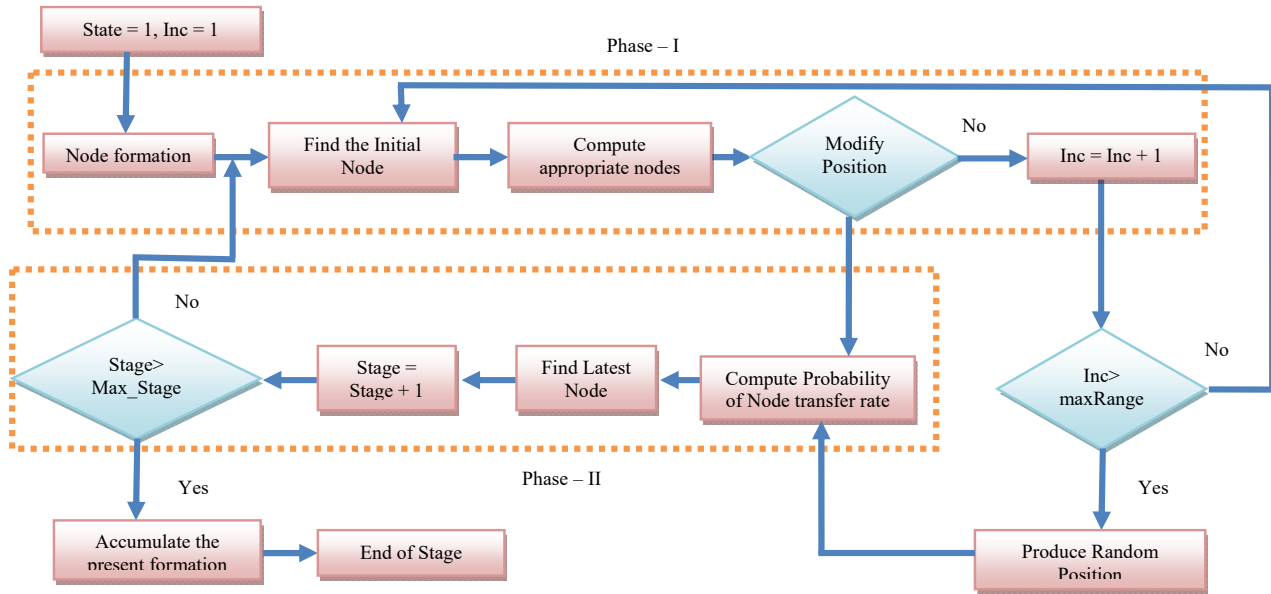


Fig. 10 Proposed Flowchart

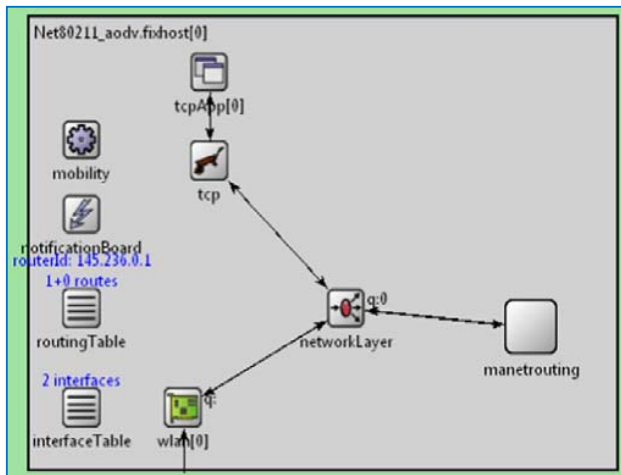


Fig. 11 Node Structure

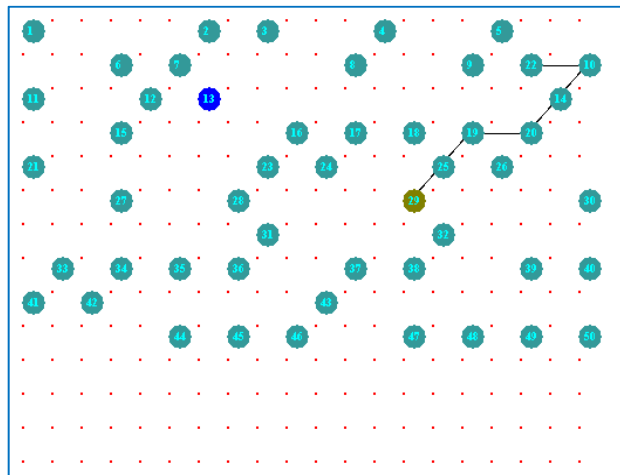


Fig. 13 Spray and Focus Routing

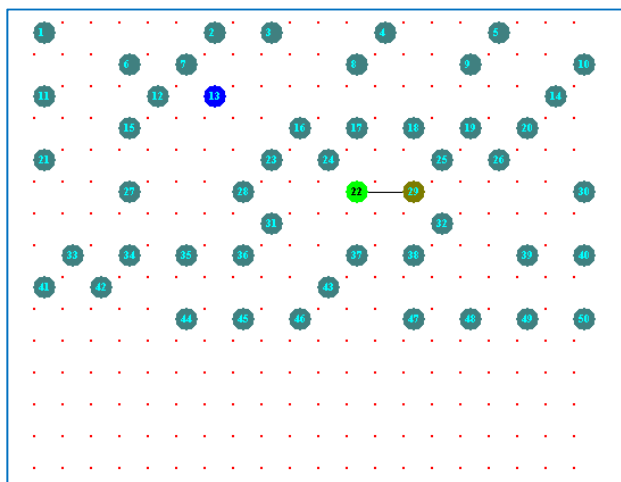


Fig. 12 Spray and Wait Routing

$$Indirect_{Trust} [Y/X] = \sum_{i=1}^N \left(\frac{Rec_{Trust} \left(\frac{Y}{n_i} \right)}{N} \right) \quad (4)$$

where $Rec_{Trust} \left(\frac{Y}{n_i} \right)$ demonstrates the recommended indirect trust value of the node Y by Adjacent Node for broadcasting data packet, which is calculated as $n_i + 1$ by n_i . N denotes the sum of all the total recommendations received by the node Y.

$$Final_{Trust} \left[\frac{Y}{X} \right] = \theta \times Direct_{Trust} \left[\frac{Y}{X} \right] + \vartheta \times Indirect_{Trust} \left[\frac{Y}{X} \right] \quad (5)$$

B. Algorithm

Procedure Location_Finding
 Obtain location of (Xi, L) from N nodes;
 Inside_Set = 0;
 for every adjacent node Ai do

```

if point of adjacent node = TRUE then
Inside_Set = Inside_Set U A;
end if
end for
Estimated_Location= Center_of_Gravity(Inside_Set);
Obtain location of Sector boundary of (Xi, L) from N nodes
Obtain initial values:
(Amin, Bmin, Xmax, Ymax)
position the search area as the rectangle
(Amin - R, Bmin - R, Xmax + R, Ymax + R), where
R is the radio range.
Partition the search area into grids.
Foreverylocation received do
    Increase the value of point by one if this point is within the
    segmentdistinct in this location.
end for
Estimated_Location= Center_of_Gravity(the highest value of
points)
Transmit observed node and wait for radio adjacent node transmits
recognizevisualization_neighbors
Transmit_Receive Observations
if for revolution from synchronize
Transmit_Receiveobservations from another location
Calculate rotation
endif
Compute absolute revolution from synchronize
Update coordinate transformation service
endif
upon expiration of timer TA for p∈ A
do
A.remove(p);
ifp.Q ≥ Qmin then
if |S| < CS then
S.add(p);
else
q := minQ S;
ifq.Q < p.Q then
S.remove(q); S.add(p);
with Period TN do
for all p ∈ S in descending order do
ifp.Q ≥ Qmin then
if |N| < CN then
N.add(p); S.remove(p);
else
q :=
replacementCandidate(N, p);
if q_ = null then
N.remove(q); N.add(p);
S.remove(p);
if U=D then
EXIT # U is the final destination of M. The routing has succeeded.
else
if U_ = N then
Discard M – EXIT
U is not needed in the routing of M
else
U is the recipient of the packet, in charge of forwarding it to D.
ifexistPh(U,D) = true then
NextNode ← getNextNodePH(U,D)
There already exists a pheromonetrail to D
else
if ND(U)= N then
NextNode ← N st ||UD| - |ND| = maxv∈ ND(U)||UD| - |vD|
else
Greedy mode fails, U launches the recovery mode.
NextNode ← Recovery(U,D)
end if
end if
Return NextNode
end if
end if
Return NextNode
end if
updateBRTTable(U)
if |UD| < |KD| then
sendBant(K,D)
Node U allows a progress compared to the stuck node and can
stop the recovery.
else
ifexistPh(U,D) = false then
initialisePh(U,D)
end if
NextNode ← getNextNodePH(U,D)
end if
Return NextNode
End Procedure
Procedure Mutation ()
t:=0;
tM := random(x,y);
Arbitrarily initialize node position Po(0)
memory Me(0)
do
evaluate node position Po(t) and memory Me(t)
best El(t1-1) from Po(t1-1)
substitute bad individual with Po(t) by the elite El(t1-1)
from Po(t1-1)
If changes strength
Po(ta) := recover suitable individuals from (Po(t1), Me(t1))
Else
Po(t) := Po(t1)
If t = t1 or changes position then
If t = t1 then
B_p(t1) := recover good entity from (Po'(t1))
If changes position then
B_p(t1) := El(t1-1)
If any arbitrary point in memory then
restore a arbitrary point with B_p(t1)
else
If t > t1 then
If f(B_p(t1)) > fun(C_M(t1)) then
fun(C_M(t1)) := B_p(t1)
T_M := t1+rand(x,y)
Perform inherited operations
Po'(t1) := select for duplicate (Po(t1))
Cross_over(P0(t1))
Mutate (P0(t1); pm)
P0(t1 + 1) := P0'(t1)
End if
Until the stop condition is convene (t1 > tmax)
End Procedure
Procedure Rep()
Input:
Re_S(i1) generates every neighbor
NS1.Level;
NS1.REP
M = total number of adjacent neighbors
Output:
OPT for every neighbor
Selected adjacent node_ID
Steps:
i=0;
REP=0;
For each Re_S(i)
Generate Re_S fields;

```

```

Generate NS1.level;
Generate NS1.REP;
  Apply rule base.
Modify output based on rule base
Compute Fk(x);
Fk(x) =base(NS1.level-RS1.level);
NS1.REP = base*RS.Battery+b2*Rs.Tot_D;
NS1.Level = base*Tot_P+base*Tot_H+base*NS.REP;
Compute output;
If output >NS1.REP then
NS1.REP=Output
Selected next_node=RS1.Node_ID
End if
  i=i+1
Next
if my_Time > ITERATION_LENGTH then
if my_State = transmitted then
return Finish
else if my_State = not_transmitted then
wait for my neighbor heads to complete, then pick one as my
transmitted_node
return finish
else if my_State = not_transmitted then
find a arbitrary node to proceed as my alternative after it finishes
    
```

```

wait for it to transmit, then return finish
end if
else if my_State = not_transmitted
and num_Followers() < f_min(my_Time) then
my_ID produce New_Random_ID()
locally transmit (Find, my_ID)
else if myState = New_node then
best_Leader my_ID
best_Follower_Count = num_Followers
for all n where n is a probable new node do
follower_Count = Poll For Num_Followers(n, my_ID)
if follower_Count > best_Follower_Count then
best_Leader = n
best_Follower_Count > follower_Count
end if
end for
if best_Leader is not my_ID then
send(best_Leader, my_ID)
wait for best_Leader to transmit it's latest communication
nearby transmit (Global, my_ID)
end if
end if
End procedure
    
```

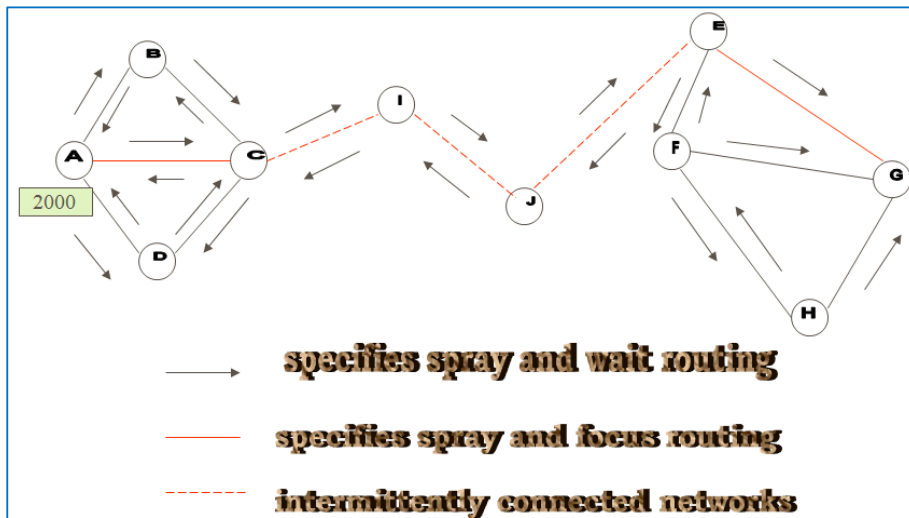


Fig. 14 Network Connectivity

V.PERFORMANCE EVALUATION

TABLE I
NODE TRAVERSING PARAMETERS

Nodes	Distance	Time	Nodes	Distance	Time
A-B	2	0.02	J-I	2	0.02
A-C	3	0.03	J-E	3	0.03
A-D	4	0.04	E-J	3	0.0399
B-A	2	0.0266	E-F	4	0.0532
B-C	2	0.0266	E-H	2	0.0266
D-A	4	0.0532	F-E	4	0.04
D-C	3	0.0399	F-H	4	0.04
C-A	3	0.03	F-G	3	0.03
C-B	2	0.02	H-E	2	0.02
C-D	3	0.03	H-F	4	0.04
I-C	4	0.0532	H-G	2	0.02
I-J	2	0.0266	G-F	3	0.0399
			G-H	2	0.0266

TABLE II
NODE MOBILITY

Node	Mobility
A	0.99
B	0.66
C	0.99
D	0.66
I	0.66
J	0.99
E	0.66
F	0.99
G	0.66
H	0.99

A. Local Evaluation of Context Information

$$U(x_1, x_2, \dots, x_n) = \sum_{i=1}^n U_i(x_i)$$

Packet size = 2000

- Consider the host A, (0.66+0.99+0.66) * 2000 = 4620
- Consider the host B, (0.99+0.99) * 2000 = 3960
- Consider the host C, (0.99+0.66+0.66) * 2000 = 5940
- Consider the host D, (0.99+0.99) * 2000 = 3960
- Consider the host E, (0.99+0.99+0.99) * 2000 = 5940
- Consider the host F, (0.66+0.99+0.66) * 2000 = 4620
- Consider the host G, (0.99+0.99) * 2000 = 3960
- Consider the host H, (0.66+0.99+0.66) * 2000 = 4620
- Consider the host I, (0.99+0.99) * 2000 = 3960
- Consider the host J, (0.66+0.66) * 2000 = 2640

B. Automatic Adaptation of Utility Functions:

$$a_i(x_i) = a_{range_i}(x_i) \cdot a_{predictability_i}(x_i) \cdot a_{availability_i}(x_i)$$

In Spray and Wait,

$$f(U(x_i)) = 3*4620 + 2*3960 + 3*5960 + 2*3960 + 2*3960 + 2*2640 + 3*5964 + 3*4620 + 3*4620 + 2*3960 = 1,14,180$$

In Spray and Focus,

$$f(U(x_i)) = (0.99+0.99+0.66+0.99+0.66+0.99) * 2000 = 10,560$$

C. Change of Degree of Connectivity

Let n(t) = 1,

$$\frac{(|(1-0.02)+1| - |(1-0.02)*1|)}{(|(1-0.02)+1|)} = \frac{(1.98-0.98)}{(1.98)} = 0.5050$$

$$\frac{(|(1-0.03)+1| - |(1-0.03)*1|)}{(|(1-0.03)+1|)} = \frac{(1.97-0.97)}{(1.97)} = 0.5076$$

$$\frac{(|(1-0.04)+1| - |(1-0.04)*1|)}{(|(1-0.04)+1|)} = \frac{(1.96-0.96)}{(1.96)} = 0.5102$$

$$\frac{(|(1-0.0266)+1| - |(1-0.0266)*1|)}{(|(1-0.0266)+1|)} = 0.5067$$

$$\frac{(|(1-0.0532)+1| - |(1-0.0532)*1|)}{(|(1-0.0532)+1|)} = 0.5136$$

$$\frac{(|(1-0.0399)+1| - |(1-0.0399)*1|)}{(|(1-0.0399)+1|)} = 0.5101$$

$$\frac{(|(1-0.0399)+1| - |(1-0.0399)*1|)}{(|(1-0.0399)+1|)} = 0.5101$$

- Consider A = 0.5050+0.5076+0.5102 = 1.5228
- Consider B = 0.5050+0.5050 = 1.0134
- Consider C = 0.5050+0.5076+0.5076+0.5102 = 2.0304

Similarly for,

- D = 1.0237
- I = 1.0203
- J = 1.0126
- E = 1.5304
- F = 1.528
- H = 1.5202
- G = 1.0168

In spray and wait,

$$3*1.5228 + 2*1.0134 + 4*2.0304 + 2*1.0237 + 2*1.0203 + 2*1.0126 + 3*1.5304 + 3*1.528 + 3*1.5202 + 2*1.0168 = 36.5994$$

In spray and focus,

$$0.5076+0.5102+0.5067+0.5076+0.5067 = 2.5388$$

D. Analysis Result

TABLE III
ANALYSIS RESULT

Contents	Spray And Wait	Spray And Focus
RESOURCES	1,14,180	10,560
TIME (sec)	36.5994	2.5388

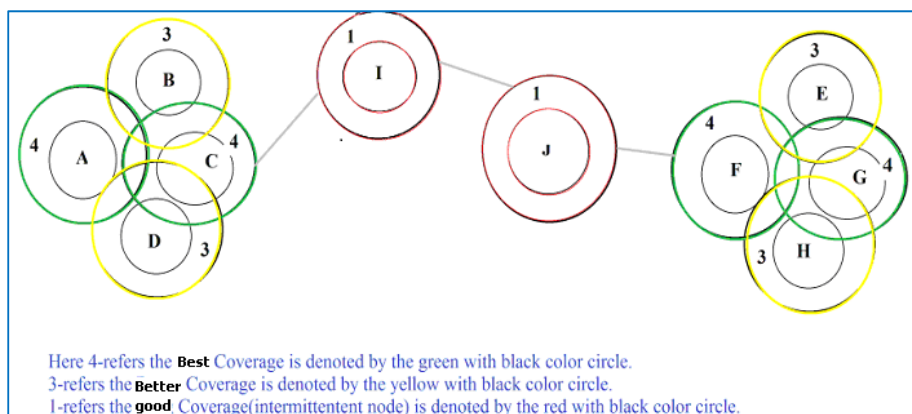


Fig. 15 Networks Coverage

TABLE IV
PERFORMANCE UNDER TRANSMISSION RANGE

Nodes	Range(mm)	Delivery Rate (%)	Baseline Rate	Avg Latency(ms)	Max Latency(ms)	Avg Hops	Max Hops
Node A	200	100	98.2	0.5	1	2.8	10
Node B	150	75	40	15.5	180	10	21
Node C	200	100	98.2	0.5	1	2.8	10
Node D	150	75	40	15.5	180	10	21
Node I	50	25	0	200	400	3	9
Node J	50	25	0	200	400	10	21
Node E	150	75	40	15.5	180	10	21
Node F	200	100	98.2	0.5	1	2.8	10
Node G	200	100	98.2	0.5	1	2.8	10
Node H	150	75	40	15.5	180	10	21

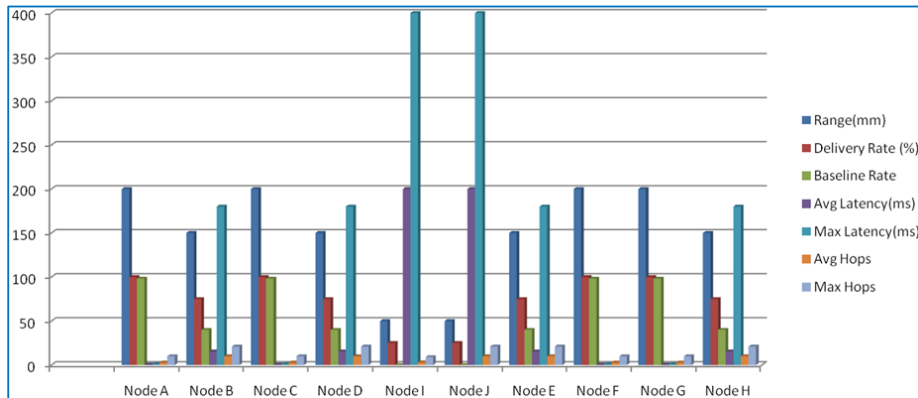


Fig. 16 Performance under Transmission range

TABLE V
RESOURCE CONSUMPTION CHARACTERISTICS

Nodes	Buffer size	Delivery Rate (%)	Avg Latency(ms)
Live Node A	500	100	80
Live Node B	666.67	75	160
Live Node C	500	100	80
Live Node D	666.67	75	160
Live Node E	666.67	75	160
Live Node F	500	100	80
Live Node G	500	100	80
Live Node H	666.67	75	160
Intermittent Node I	2000	25	300
Intermittent Node J	2000	25	300

TABLE VI
PERFORMANCE ANALYSIS IN VARIOUS PARAMETERS

Mobility Model (speed)	Delivery Rate of spray and wait (%)	Delivery Rate of spray and focus (%)	Delay in spray and wait (ms)	Delay in spray and focus (ms)
Random Waypoint (0-50 mm/ms)	65.4	90.2	25069	5069
Limited Random Waypoint (0-50 mm/ms)	53.2	86.4	38060	8060
Area Base (0-50 mm/ms)	46.3	76.3	49432	9432
Random Waypoint (0-25 mm/ms)	63.1	89.9	25162	5162
Limited Random Waypoint (0-25 mm/ms)	49.8	83.4	38164	8164
Area Base (0-25 mm/ms)	42.1	71.0	49498	9498

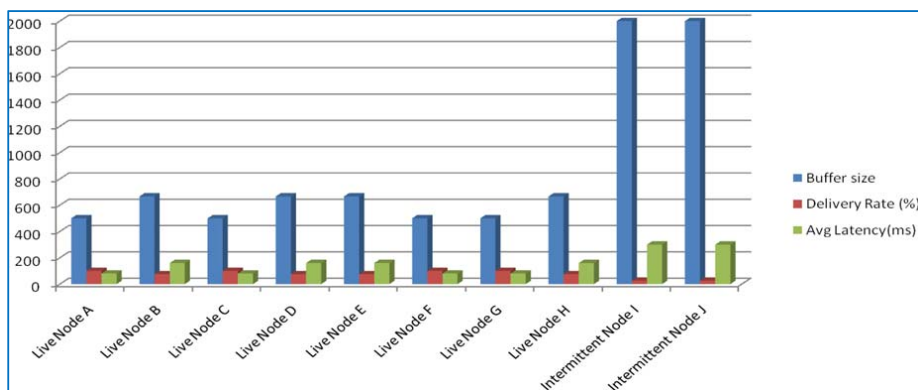


Fig. 17 Resource consumption

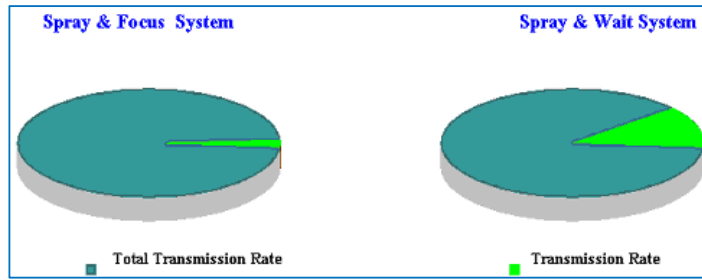


Fig. 18 Transmission Rate

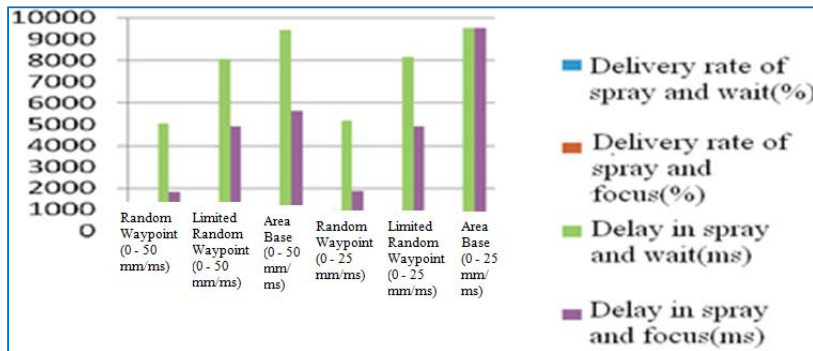


Fig. 19 Performance Analysis

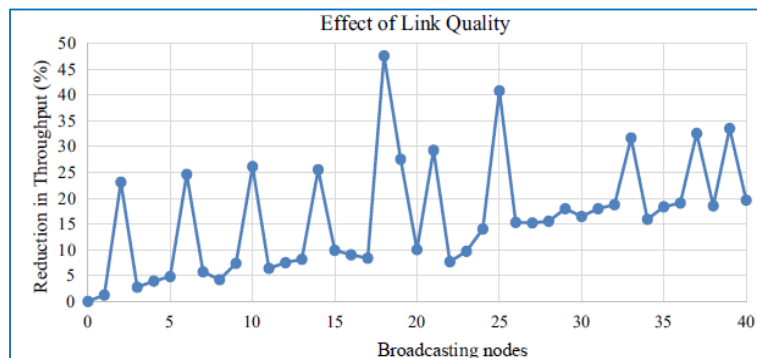


Fig. 20 Link Quality

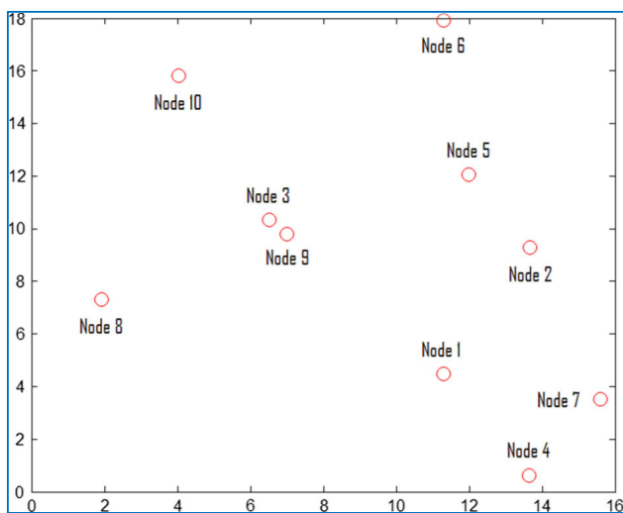


Fig. 21 Communication in Iteration

VI. CONCLUSION & FUTURE WORK

The spray and focus routing for communication between the intermittent networks was done with minimal time consumption and resource wastage. In future, this paper can be improved by means of considering the Quality of service in delivering the messages. Quality of service (QoS) refers to resource reservation control mechanisms rather than the achieved service quality. Also we can find the path stability before choosing a particular path. So that it will improve the route optimization.

REFERENCES

- [1] A. Vahdat and D. Becker, "Epidemic Routing for partially connected Ad hoc networks", Technical Report CS2000-06 Dept. Computer Science, Duke Univ., 2000.
- [2] A. Lindgren, A. Doria, O. Schelen, "Probabilistic Routing in intermittently connected networks", Mobile Computing and Comm. Rev., Vol 7, no.3, July 2003.
- [3] S. Balaji, M. Rajaram (2016), "SIPTAN: Securing Inimitable and

- Plundering Track for Ad Hoc Network”, *Wireless Personal Communications*, Springer, 1-21, DOI 10.1007/s11277-016-3187-y.
- [4] V. Zhao, M. Ammar and E. Zegura, “A message ferrying approach for Data Delivery in Sparse mobile adhoc networks”, *Proc. ACM MobiHoc’04*, May 2004.
- [5] M. Mirco Musolesi, Stephen Hailes, Cecilia Mascolo, “Adaptive Routing for Intermittently Connected Mobile Ad Hoc Networks,” *Proc. Int’l Conf. World of Wireless, Mobile, and Multimedia networks (WoWMoM ’05)*, June 2005
- [6] S. Balaji, M. Rajaram (2014), “EUDIS-An Encryption Scheme for User-Data Security in Public Networks”, *World Academy of Science, Engineering and Technology, International Journal of Computer, Information, Systems and Control Engineering Vol: 8 No:11*, pp. 1825 – 1830.
- [7] T. Spyropoulos, K. Psounis and C.S. Raghavendra, “Spray and wait: An Efficient routing scheme for intermittently connected mobile networks”, *Proc. Workshop Delay Tolerant Networking and Related networks (WDTN ’05)*, pp.252-259,2005
- [8] Mirco Musolini, Cecilia Mascolo “CAR: Context aware adaptive routing for delay tolerant mobile networks”, Feb 2009.
- [9] G. Arun Sam Paul Thomas, R. Karthik Ganesh, A. Kandasamy, S. Balaji, Y. Harold Robinson, (2011) “An Advanced Controlled-Flooding Routing with Group Organization for Delay Tolerant Networks using A-SMART”, *Emerging Trends in Electrical and Computer Technology (ICETECT)*, 978-1-4244-7926-9/11, IEEE.
- [10] R. Chen, F. Bao, M. Chang, J.-H. Cho, Dynamic trust management for delay tolerant networks and its application to secure routing, *Parallel and Distributed Systems*, *IEEE Transactions on* 25 (5) (2014) 1200– 1210.
- [11] N. Li, S. K. Das, A trust-based framework for data forwarding in opportunistic networks, *Ad Hoc Networks* 11 (4) (2013) 1497–1509.
- [12] Harold Robinson, Y., Rajaram, M., Golden Julie, E. and Balaji, S. (2016), “TBOR: Tree Based Opportunistic Routing for Mobile Ad Hoc Networks”, *World Academy of Science, Engineering and Technology, International Journal of Computer, Electrical, Automation, Control and Information Engineering Vol: 10, No:6*, pp. 1115 – 1122.
- [13] S. Biswas and R. Morris, “Exor: opportunistic multi-hop routing for wireless networks,” *ACM SIGCOMM Computer Communication Review*, vol. 35, no. 4, pp. 133–144, August 2005.
- [14] Z. Zhong and S. Nelakuditi, “On the efficacy of opportunistic routing,” in 4th Annual IEEE Communications Society Conference on Sensor, Mesh and Ad Hoc Communications and Networks, 2007, pp. 441–450.
- [15] Balaji, S., Julie, E. G., Rajaram, M., & Robinson, Y. H. Fuzzy Based Particle Swarm Optimization Routing Technique for Load Balancing in Wireless Sensor Networks, *World Academy of Science, Engineering and Technology, International Journal of Computer, Electrical, Automation, Control and Information Engineering Vol:10, No:7*, 2016, pp. 1384 – 1393.
- [16] A. Darehshoorzadeh and L. Cerda-Alabern, “Candidate selection algorithms in opportunistic routing,” in *Proceedings of the 5th ACM workshop on Performance monitoring and measurement of heterogeneous wireless and wired networks*, ser. PM2HW2N ’10. New York, NY, USA: ACM, 2010, pp. 48–54.
- [17] A. K. Dey, G. D. Abowd, and D. Salber, “A conceptual framework and a toolkit for supporting the rapid prototyping of context-aware applications,” *Hum.-Comput. Interact.*, vol. 16, no. 2, pp. 97–166, 2001.
- [18] Harold Robinson, Y., Rajaram, M., Golden Julie, E. and Balaji, S. (2016), “Tree Based Data Fusion Clustering Routing Algorithm for Illimitable Network Administration in Wireless Sensor Network”, *World Academy of Science, Engineering and Technology, International Journal of Computer, Electrical, Automation, Control and Information Engineering Vol:10, No:6*, pp. 1123 – 1130.
- [19] Tashtoush, Y.M., Okour, M.A.: Fuzzy Self-Clustering for Wireless Sensor Networks. In *proceeding of the IEEE/IFIP International Conference on Embedded and Ubiquitous Computing*, pp. 223–229. 2008.
- [20] Kim, B.H., Moon, S.Y., Lee, H.Y., Sun, C.I., and Cho, T.H.: Cluster Adaptation Method to Enhance Performance of Filtering scheme in Sensor Network in *Proceeding of the 11th International Conference on Advanced Communication Technology*, pp. 411–416. 2009.
- [21] Harold Robinson, Y., Rajaram, M., Golden Julie, E. and Balaji, S. (2016), “Detection of Black Holes in MANET Using Collaborative Watchdog with Fuzzy Logic”, *World Academy of Science, Engineering and Technology, International Journal of Computer, Electrical, Automation, Control and Information Engineering Vol:10, No:3*, pp. 575 – 581.
- [22] Veena, K.N., Vijaya Kumar, B.P.: Dynamic Clustering for Wireless Sensor Networks: A Neuro-Fuzzy Technique Approach’ in *Proceeding of the IEEE International Conference on Computational Intelligence and Computing Research (ICCCIC)*, pp. 1–6. 2010.
- [23] M. Musolesi and C. Mascolo, “Car: context-aware adaptive routing for delay-tolerant mobile networks,” *Mobile Computing, IEEE Transactions on*, vol. 8, no. 2, pp. 246–260, 2009.
- [24] Harold Robinson, Y., Golden Julie E, Balaji S, Ayyasamy A, (2016), *Energy Aware Clustering Scheme in Wireless Sensor Network Using Neuro-Fuzzy Approach* , *Wireless Personal Communications*, Springer, 1-19, Doi: 10.1007/s11277-016-3793-8.
- [25] Z. Wang, C. Li, and Y. Chen, “Local cooperative relay for opportunistic data forwarding in mobile ad-hoc networks,” in *Proceedings of the IEEE International Conference on Communications*, 2012, pp. 5381–5386.
- [26] C. Boldrini, M. Conti, F. Delmastro, and A. Passarella, “Context- and social-aware middleware for opportunistic networks,” *J. Netw. Comput. Appl.*, vol. 33, no. 5, pp. 525–541, Sep. 2010.
- [27] Balaji, S., Rajaram, M., Robinson, Y. H., & Julie, E. G. (2016). A Hypercube Social Feature Extraction and Multipath Routing in Delay Tolerant Networks. *World Academy of Science, Engineering and Technology, International Journal of Computer, Electrical, Automation, Control and Information Engineering*, 10(6), 1220-1229.
- [28] M. Bheemalingaiah, C. Venkataiah, K. Vinay Kumar, M. M. Naidu, D. Sreenivasa Rao, “ Survey of Energy Aware On-demand Multipath Routing Protocols in Mobile Ad Hoc Networks”, *International Journal of Advanced Research in Computer Science and Software Engineering*, Volume 6, Issue 4, April 2016.
- [29] Yibin Liang, Thesis on Multipath “Fresnel Zone” Routing for Wireless Ad Hoc Networks”, *Virginia Polytechnic Institute and State University*, March 2004.
- [30] Robinson, Y. H., Julie, E. G., & Balaji, S. (2016), “Bandwidth and Delay Aware Routing Protocol with Scheduling Algorithm for Multi Hop Mobile Ad Hoc Networks”. *World Academy of Science, Engineering and Technology, International Journal of Computer, Electrical, Automation, Control and Information Engineering*, 10(8), 1512-1521.
- [31] Ya Xu, John Heidemann, Deborah Estrin, Geography informed Energy Conservation for Ad Hoc Routing. *Proceedings of the Seventh Annual ACM/IEEE International Conference on Mobile Computing and Networking (ACM Mobicom)*, 2001.
- [32] Heinzelman, W.R., Chankrakasan A., Balakrishnan, H.: Energy Efficient Communication Protocol for Wireless Micro sensor Network. *Int. Conf. Sys. Scien.* 8, 2000, pp. 3005–3014.
- [33] Harold Robinson, Y., Rajaram, M., Golden Julie, E. and Balaji, S. (2016) Dominating Set Algorithm and Trust Evaluation Scheme for Secured Cluster Formation and Data Transferring. *World Academy of Science, Engineering and Technology, International Journal of Computer, Electrical, Automation, Control and Information Engineering*, vol. 10, No. 2, pp. 388-393.
- [34] Wedde HF, Farooq M, Pannen baecker T, Vogel B. BeeAdHoc: an energy efficient routing algorithm for mobile ad hoc networks inspired by bee behavior. *ProcACM Genet Evol Comput Conf* 2005:153–60.
- [35] Abed AK, Oz G, Aybay I. Influence of mobility models on the performance of data dissemination and routing in wireless mobile ad hoc networks. *J Comput Electr Eng* 2014; 40:319–29.
- [36] Balaji, S., Harold Robinson, Y. and Rajaram, M. (2016) SCSBE: Secured Cluster and Sleep Based Energy-Efficient Sensory Data Collection with Mobile Sinks. *Circuits and Systems*, 7, 1992-2001. <http://dx.doi.org/10.4236/cs.2016.78173>.
- [37] Su BL, Wang MS, Huang YM. Fuzzy logic weighted multi-criteria of dynamic route lifetime for reliable multicast routing an ad hoc networks. *J Expert Syst Appl* 2008; 35:476–84.
- [38] Mazhar N, Farooq M. A hybrid artificial immune system (AIS) model for power aware secure mobile ad hoc networks (MANETs) routing protocols. *J Appl Soft Comput* 2011; 11:5695–714.
- [39] Robinson, Y.H., Balaji, S. and Rajaram, M. (2016) “ECBK: Enhanced Cluster Based Key Management Scheme for Achieving Quality of Service”, *Circuits and Systems*, 7, 2014-2024. <http://dx.doi.org/10.4236/cs.2016.78175>.
- [40] S. Bohacek, J.P. Hespanha, K. Obraczka, J. Lee, C. Lim, Enhancing security via stochastic routing, in: *Proceedings of the Eleventh International Conference on Computer Communication and Networks*, 2002.
- [41] W. Peng and X. Lu, “AHBP: An efficient broadcast protocol for mobile ad hoc networks,” *Journal of computer science and technology*, vol. 16,

no. 2, pp. 114–125, 2001.

- [42] M Geethalakshmi, Y Harold Robinson, "Fault tolerant routing and scheduling scheme for multi hop wireless networks", International Journal of Advanced Research in Computer Science and Software Engineering, vol.3, no.3, 2013.



Dr. S. Balaji completed his Ph.D. in Anna University, Chennai and currently working as an Associate Professor in Dept. of CSE at Francis Xavier Engineering College, Tirunelveli. His research interests are Wireless Networks Mobile Computing, Network Security with apps, Wireless Sensor Networks, Cloud Computing. He has presented many papers in National and International conferences in network security, Mobile Computing, network security, and Cloud Computing. He has organized and conducted various national and international conferences, International Seminars and National Workshops. And also his methodology of teaching about TCP & UDP is hosted on Wipro Mission 10x portal. He is a life time member of ISTE.



Mrs. E. Golden Julie received her B.E degree in Computer Science and Eng. in 2005 from Anna University Chennai and ME degree in Computer Science and Engineering in 2008 from Anna University Chennai. Currently she is Pursuing her Ph.D. from Anna University Chennai. Presently she is working as assistant professor in Regional centre Anna University, Tirunelveli, India She has published many research papers in various fields. Her research area includes Wireless Sensor Adhoc Networks and Image Processing. She is a member of ISTE.



Dr. Y. Harold Robinson is currently working as an Associate Professor and Head, Department of CSE in SCAD College of engineering and Technology, Tirunelveli. He finished ME degree in Anna University, Chennai. He completed Ph.D. in Anna University Chennai. His research interests are Wireless Networks Mobile Computing, Wireless Sensor Networks. He has published several Research papers in International Journals. He has presented many papers in National and International conferences in Network security, Mobile Computing and Cloud Computing.