

Parametric Study of Vertical Diffusion Still for Water Desalination

A. Seleem, M. Mortada, M. El Morsi, M. Younan

Abstract—Diffusion stills have been effective in water desalination. The present work represents a model of the distillation process by using vertical single-effect diffusion stills. A semi-analytical model has been developed to model the process. A software computer code using Engineering Equation Solver EES software has been developed to solve the equations of the developed model. An experimental setup has been constructed, and used for the validation of the model. The model is also validated against former literature results. The results obtained from the present experimental test rig, and the data from the literature, have been compared with the results of the code to find its best range of validity. In addition, a parametric analysis of the system has been developed using the model to determine the effect of operating conditions on the system's performance. The dominant parameters that affect the productivity of the still are the hot plate temperature that ranges from (55- 90 °C) and feed flow rate in range of (0.00694-0.0211 kg/m²-s).

Keywords—Analytical Model, Solar Distillation, Sustainable Water Systems, Vertical Diffusion Still.

I. INTRODUCTION

FRESH water is the nature's gift and plays a key role in the development of an economy of a society. It is now a global crisis, but the solar still represents a solution for the domestic scale [1]. The thermal analysis of the solar still is important to have a better understanding of how to enhance the productivity of the still. There have been many studies about the calculations of the vertical diffusion solar still. Dunkle [2] is one of the earliest who studied Vertical Multiple Effect Diffusion Stills. He developed experimentally the performance of a five-effect multiple-effect diffusion still. His study is limited to certain conditions, and also faced some problems with the experimental setup. Cooper and Appleyard [3] simplified the Multiple Effect Diffusion (MED) system by combining the solar collector and the diffusion still into one unit. Selcuk [4] performed indoor tests for a Multiple-effect, tilted solar still to study the performance of the still. Elsayed et al. [5] studied theoretically three-effect diffusion and developed a mathematical model as well as an experimental study on a three-effect multiple-effect diffusion-still. He verified the calculated results with the experimental results, and then [5] presented a study of parametric conditions on the

performance of an ideal diffusion still and also developed numerical correlations to predict the performance of the still. Grater et al. [7] investigated experimentally a multi-effect still for hybrid solar/fossil desalination. Tanaka et al. [6] constructed eleven-effect vertical multiple-effect diffusion still. Tanaka et al. [9] performed a parametric study and investigated the performance of the vertical multiple-effect diffusion still. He listed different heat and mass transfer correlation to be employed in the analytical model, and found that [7] is the closest correlation to the experimental work. There are some researchers who investigated the single-effect diffusion still. Bouchekima et al. [8] presented a theoretical analysis of heat and mass transfer inside a solar distiller and compared it with the experimental measurements of the distiller performance.

II. SCOPE OF WORK

The literature shows a significant amount of research has been conducted on vertical diffusion solar stills. Some of literature was about to develop numerical and experimental models and to verify them against each other. Some others were theoretically focused on the heat and mass transfer inside the diffusion gap. The former studies reveal that there is no simple semi-analytical model that can predict the performance of vertical diffusion stills.

The scope of study is to investigate vertical single-effect-diffusion still as shown below in

Fig. 1, by developing a semi-analytical model of the diffusion still utilizing flat sheets with wick. The study also includes construction of an experimental setup to verify the semi-analytical model. The model is used to investigate the parameters that influence the still productivity and increase the distilled yield such as: (i) the hot plate temperature, (ii) the feed water temperature, (iii) the cold plate temperature, (iv) the mass feed flow rate.

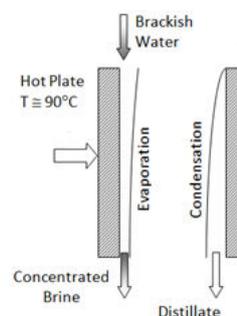


Fig. 1 A schematic diagram of vertical single-effect diffusion still

A. Seleem is with the Mechanical Engineering Department, the American University in Cairo, AUC Avenue, P.O. Box 74, New Cairo 11835, Egypt. (e-mail: amr.seleem@aucegypt.edu)

M. Mortada is with the Mechanical Power Engineering Department, Cairo University, Egypt (e-mail: mortada@cu.edu.eg).

M. El Morsi and M. Younan are with the Mechanical Engineering Department, the American University in Cairo (e-mail: melmorsi@aucegypt.edu, myounan@aucegypt.edu).

water temperature, T_{HSi} and hot water temperature at the exit, T_{HSo}

The heat transferred through the apparatus from the heat source (hot water sprays) to the heat sink (cold water sprays), exhibits 5 stages of transfer:

- Through the evaporator (first vertical plate)
- Through the saline film
- Through the air gap
- Through the condensate film
- Through the condenser (second vertical plate)

Consequently, there are formulas that describe each transfer stage; especially the middle stage involves heat and mass transfer as shown in Fig. 3.

A. First Stage: Heat Transfer through the Hot Vertical Plate

The heat transfer is approximated to be one-dimensional, as Fourier's law can be applied:

$$Q_{in} = \frac{T_h - T_{Sflm}}{R_h} \quad (2)$$

The thermal resistance of the hot plate R_p can be calculated as:

$$R_p = \frac{\delta_{hp}}{A \cdot k_p} \quad (3)$$

The thermal conductivity of evaporation plate's material k_{hp} is evaluated at average temperature $(\frac{T_{hs} + T_{Sflm}}{2})$.

B. Second Stage: Heat Transfer through the Saline Film

The temperature drop across the evaporating film is evaluated as

$$Q_1 = \frac{T_{Sflm} - T_{Gps}}{R_{Sflm}} \quad (4)$$

The thermal resistance of the evaporating film R_{Sflm} can be calculated as:

$$R_{Sflm} = \frac{\delta_{Sflm}}{A \cdot k_{Sflm}} \quad (5)$$

The thermal conductivity of the saline film k_{Sflm} is evaluated at an average temperature $(\frac{T_{Sflm} + T_{Gps}}{2})$

The saline film thickness can be estimated according to the Nusselt's theory as

$$\delta_{Sflm} = \frac{4}{5L} \frac{\rho_{Sflm}(\rho_{Sflm} - \rho_g) \cdot g \cdot h'_{fg}}{4k_{Sflm} \mu_{Sflm} (T_{Sflm} - T_{Gps})} (\delta_{S,in}^5 - \delta_{S,out}^5) \quad (6)$$

where L is the length of saline film, ρ_{Sflm} , and μ_{Sflm} are the density, and viscosity evaluated at average temperature $(\frac{T_{Sflm} + T_{Gps}}{2})$, respectively. $\delta_{S,in}$, and $\delta_{S,out}$ are the thickness of the saline film at the partition inlet and outlet, respectively.

The thickness of the saline feed at the upper edge of the hot plate, $\delta_{S,in}$, can be evaluated using an empirical correlation deduced from the rectangular weir equation:

$$\delta_{in} = \left(\frac{m_{in}}{760}\right)^{\frac{2}{3}} \quad (7)$$

The thickness at outlet $\delta_{S,out}$, can be evaluated as

$$\delta_{S,out} = (\delta_{S,in}^4 - L \frac{4k_{Sflm} \mu_{Sflm} (T_{Sflm} - T_{Gps})}{\rho_{Sflm} (\rho_{Sflm} - \rho_{Sflm}) g h'_{fg}})^{\frac{1}{4}} \quad (8)$$

While ρ_g is the density of water vapor at saturation temperature, h'_{fg} is the modified latent heat that can be calculated by:

$$h'_{fg} = h_{fg} + 0.68 C_p (T_{Sflm} - T_{Gps}) \quad (9)$$

where C_p is the specific heat of evaporating saline film estimated at the average temperature $(\frac{T_{Sflm} + T_{Gps}}{2})$.

C. Third Stage: Heat Transfer through the Air Gap

This stage includes the transfer of sensible and latent heat phases; the sensible heat is transferred in three modes: conduction, convection, and radiation. The latent heat is transferred to the condensing side through mass diffusion.

$$Q_{in} = Q_k + Q_c + Q_r + Q_l \quad (10)$$

The terms Q_k , Q_c , Q_r , and Q_l represent the portion of heat transferred by conduction, convection, radiation, and latent heat, respectively.

The conduction heat transfer across the air gap is simply obtained by applying Fourier's law:

$$Q_k = \frac{T_{Gps} - T_{Gpd}}{R_k} \quad (11)$$

The thermal resistance of air gap due to conduction R_k is estimated by:

$$R_k = \frac{\delta_{cGp}}{A \cdot k_{Gp}} \quad (12)$$

The thermal conductivity of air k_{Gp} is obtained at average temperature $(\frac{T_{Gps} + T_{Gpd}}{2})$.

The convection heat transfer Q_c and the radiation heat transfer Q_r , across the gap are neglected due to the small gap.

The latent component is estimated using

$$Q_l = \dot{m}_{evap} \cdot h_{fg,Gps} \quad (13)$$

$$\dot{m}_{evap} = \frac{\zeta M_w \cdot 10^3}{R(\bar{T}_i + 273)} \frac{P_r}{\delta_{Gp}} \ln \frac{P_r - P_{di}}{P_r - P_{ei}} \quad (14)$$

where P_{di} , and P_{ei} are partial pressures, and the diffusion coefficient ζ can be calculated using:

$$\zeta = 0.911 \cdot \frac{10^{-6}}{P_r} \left[\frac{(\bar{T}_i + 273)^{2.5}}{\bar{T}_i + 518} \right] \quad (15)$$

$$\bar{T}_i = \frac{T_h + T_c}{2} \quad (16)$$

where M_w is the molecular weight of water-vapor, and P_r is the total pressure (kPa), and T_c is the cold plate temperature.

Fig. 4 describes the structure of the analytical code.

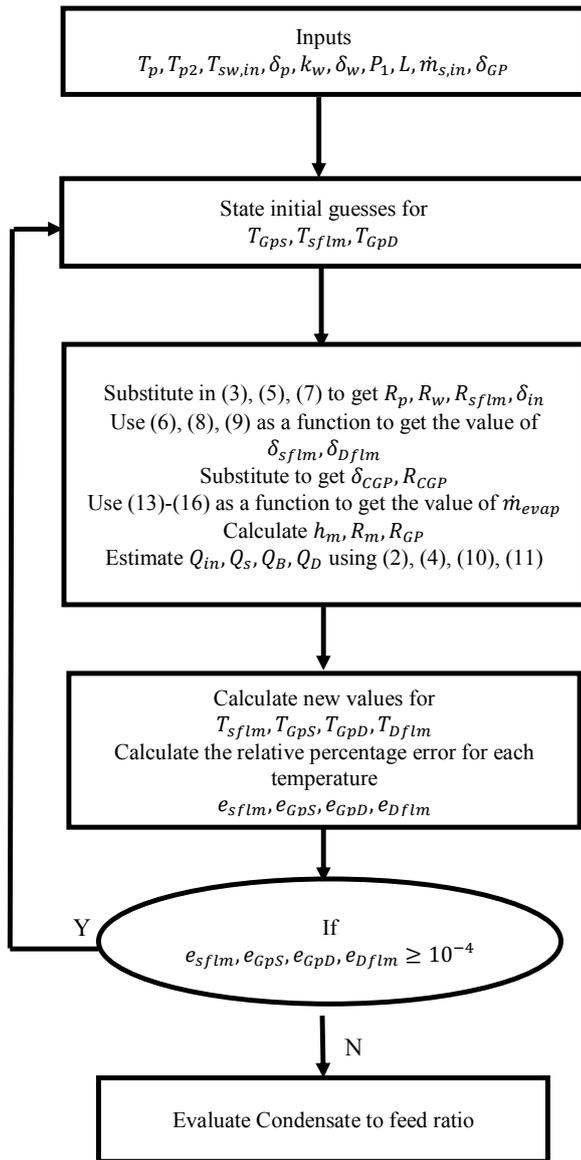


Fig. 4 Flow chart of the analytical developed code

V. RESULTS AND DISCUSSION

The analytical model is developed to predict the yield of vertical diffusion solar still.

The results of the experimental model are presented in Table I. Fig. 5 shows a comparison between the experimental results obtained by the test bench and the theoretical results obtained by the analytical model at different feed flow rate for the change of hot plate temperature with respect to the condensate to feed ratio (CF). The experimental and analytical results are in a quite agreement.

TABLE I
THE CALCULATED RESULTS AGAINST [5] AND EXPERIMENTAL RESULTS USING THE DEVELOPED ANALYTICAL MODEL AT (CONSTANT FEED RATE $\dot{m}_{in}=0.00975$ KG/M2-S, AND CONSTANT DIFFUSION GAP $\delta_{gap}=6$ MM, , FEED WATER TEMPERATURE $T_{s,in}=30$ °C.)

		El Sayed Experimental		Code Results
Hot Plate Temperature (T_{hp})	Cold Plate Temperature (T_{cp})	Condensate	CF Experimental	CF Theoretical
°C	°C	kg/m2-h		
60	30	2.22	0.148	0.109
68	40	3.22	0.215	0.143
70	30	3.91	0.261	0.175
71	40	3.603	0.240	0.168

The validation of the analytical code against literature and the experimental results was in a good agreement (almost all the points are located in the region of maximum deviation of 15%). It is now important to investigate the influence of the design parameters of the diffusion still. There are different parameters such as the hot plate temperature, cold plate temperature, the feed water temperature, mass feed rate and diffusion gap.

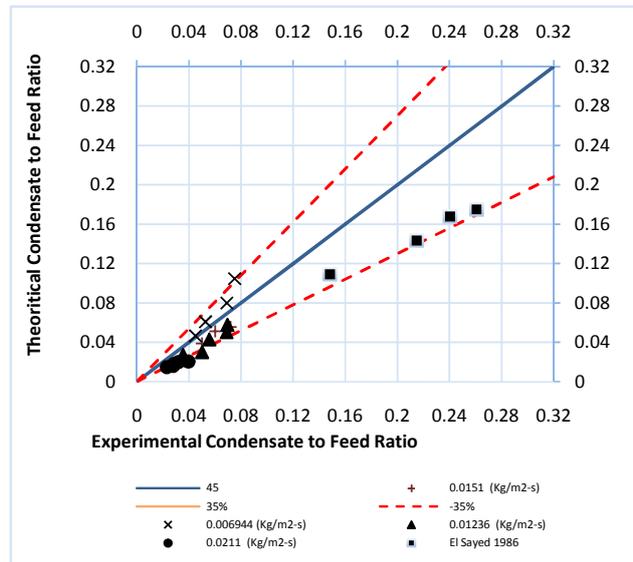


Fig. 5 The theoretical results of condensate to feed ratio against the experimental condensate to feed ratio results (CF)

Table II shows the experimental results of the test rig at different conditions and different flow rates.

Figs. 6-8 show the relations of influential parameters to the productivity of the still. It is obvious, that the most dominant parameter is the hot plate temperature and the diffusion gap thickness.

There are many parameters that influence the productivity of the vertical diffusion stills. Not all of them should be changed in the experimental setup to verify the mathematical model but at least two could be employed to give a validation to the model and study effect of other parameters change.

TABLE II
EXPERIMENTAL RESULTS OF RUNNING THE VERTICAL DIFFUSION STILL
UNDER THE FOLLOWING CONDITIONS ($T_c=30^\circ\text{C}$, $T_{s,in}=26^\circ\text{C}$) IN
COMPARISON WITH THE THEORETICAL CONDENSATE TO FEED RATIO

Feed flow rate	Hot temperature	Condensate	Feed	CF	CF
(ml/min)	$^\circ\text{C}$	ml/min	ml/min	Experimental	Theoretical
(150)	62.15	90	2000	0.047	0.04686
[0.006944]	67.35	100	1900	0.061	0.06074
	73.35	110	1600	0.080	0.08022
	79.5	120	1600	0.105	0.1048
(267)	63.55	60	1700	0.028	0.02764
[0.01236]	69.1	90	1800	0.030	0.03016
	73.5	100	1800	0.043	0.04311
	77.3	110	1600	0.050	0.05043
	80.75	125	1800	0.058	0.05787
(327)	76.5	90	1800	0.039	0.03894
[0.0151]	83.6	90	1500	0.051	0.05116
	85.75	115	1600	0.055	0.05539
(456)	62.2	50	2200	0.015	0.01483
[0.0211]	64.2	55	2000	0.016	0.01619
	66.8	60	2100	0.018	0.01808
	69.15	70	2200	0.020	0.01991
	69.8	75	1900	0.020	0.02044

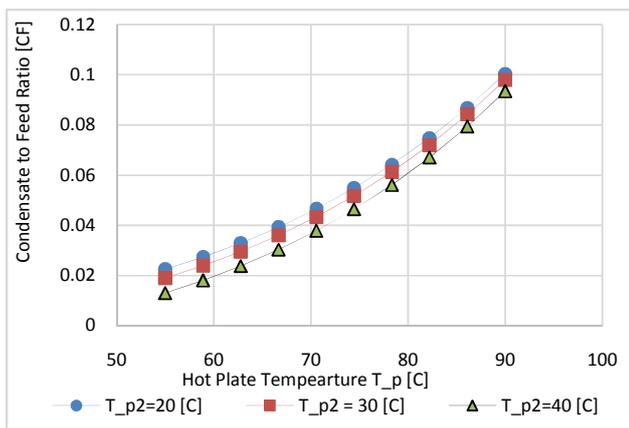


Fig. 6 The relation between hot plate temperature T_p and the CF with different cold plate temperatures ($T_{sw,in}=20^\circ\text{C}$, $m_{sw,in}=0.0151\text{ kg/m}^2\text{-s}$, $\Delta_{gap}=10$)

In the present experimental model, the change of the saline feed flow rate and the hot plate temperature have been considered, while the distance between the two isothermal plate, the cold plate temperature, and the inlet feed temperature are kept constant.

The code has been used to show the effect former parameters. Fig. 6 shows the effect of decreasing the cold plate temperature which lead to a significant increase in the yield from 40°C to 30°C then a slight increase from 30°C to 20°C .

The effect of decreasing the air gap distance between the two plates is presented in Fig. 7. The increase in yield corresponding to the decrease of the gap thickness is considered exponential as it does not have the same rate of increase.

But the decrease in air gap thickness is related strongly to the saline feed flow rate as it is limited by the distance between the two plates. Thus, air gap thickness of 4 mm is applicable for a very limited range of feed flow rates.

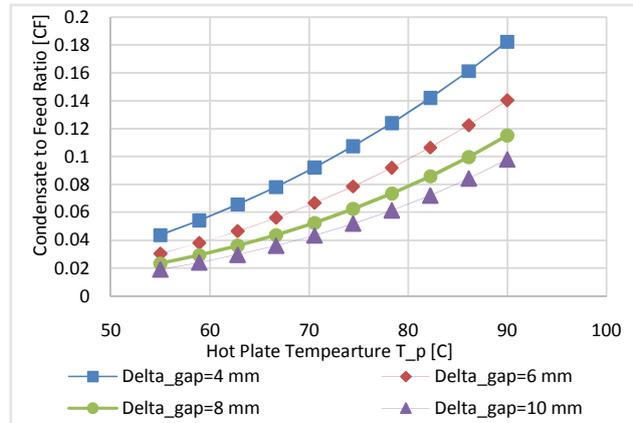


Fig. 7 The relation between the feed water temperature and the CF at ($T_{p2}=30^\circ\text{C}$, $T_{sw,in}=20^\circ\text{C}$, $m_{sw,in}=0.0151\text{ kg/m}^2\text{-s}$)

The change in feed inlet temperature is observed on Fig. 8. It is clear that increasing the saline feed temperature leads to an increase in the condensate to feed ratio. But the increase is noticed to be very slight compared to the other former factors.

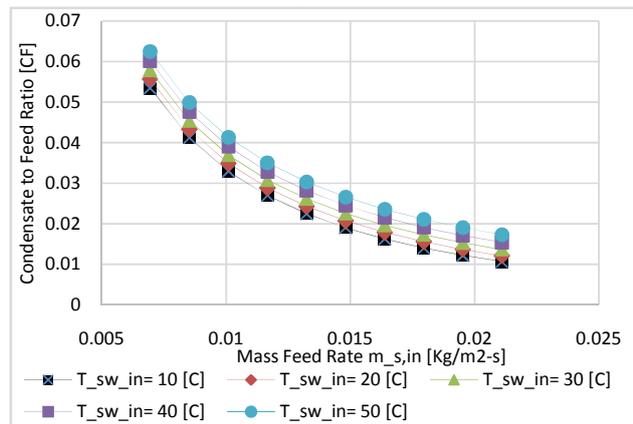


Fig. 8 The relation between the feed water rate and the CF with different feed water temperatures at ($T_p=80^\circ\text{C}$, $T_{p2}=30^\circ\text{C}$, $\Delta_{gap}=10$)

VI. CONCLUSION

The main aim of presented analytical model is to contribute for a better understanding of the vertical diffusion stills. A semi-analytical model has been developed and has also been validated against former authors [5]. In addition an experimental setup is constructed for validation.

The experimental setup has been installed to investigate the performance of the flat sheets with wick. The results of the analytical and experimental models for the flat sheet have shown a good agreement. Moreover, a parametric study has

been conducted and showed the dominant and influential parameters that affect the performance of the still.

There are four parameters that influence the productivity of the still. All of the four parameters could be varied by the user. The productivity increases when the hot plate temperature increases and air gap thickness decreases.

ACKNOWLEDGMENT

This work has been supported by the Research Grant NPRP 5-161-2-053 from the Qatar National Research Fund.

REFERENCES

- [1] World Business Council for Sustainable Development, Facts and Trends: Water, WBCSD, 2009. (Online). Available: www.wbcsd.org/Pages/EDocument/EDocumentDetails.aspx?ID=137. (Accessed September 2013).
- [2] R. Dunkle, "Solar Water Distillation: The Roof Type Still and a Multiple-Effect Diffusion Still," *International Heat Transfer Conference, University of Colorado*, vol. 5, pp. 895-902, 1961.
- [3] Cooper, P.I., Appleyard, J.A., "The construction and performance of a three effect, wick-type, tilted solar still," vol. 12, pp. 4-8, 1967.
- [4] K. Selcuk, "Design and Performance Evaluation of A Multiple-Effect, Tilted Solar Distillation Unit," vol. 1, no. 8, 1964.
- [5] Elsayed, M., Fathalah, K., Shams, J., and Sabbagh, J., "Performance of Multiple Effect Diffusion Stills," *Desalination*, vol. 51, pp. 183-199, 1984.
- [6] M. M. Elsayed, "Effects of Parametric Conditions on the Performance of an Ideal Diffusion Still," *Applied Energy*, no. 22, pp. 187-203, 1986.
- [7] Garter, F., Durrbeck, M., Rheinlander J., "Multi-effect Still for Hybrid Solar/Fossil Desalination of Sea and Brackish Water," *Desalination*, vol. 138, pp. 111-119, 2001.
- [8] Tanaka, H., Nakatake, Y., "A Vertical Multiple-Effect Diffusion-Type Solar Still Coupled With a Heat-Pipe Solar Collector," *Desalination*, vol. 160, pp. 195-205, 2004.
- [9] Tanaka, H., Nakatake Y., Watanabe, K., "Parametric Study on a Vertical Multiple-effect diffusion-Type Solar Still Coupled with a Heat-Pipe Solar Collector," *Desalination*, vol. 171, pp. 243-253, 2004.
- [10] Boucekima, B., Gros, B., Ouaches, R., and Diboun, M., "The Performance of The Capillary Film Solar Still Installed in South Algeria," *Desalination*, no. 137, pp. 31-38, 2001.
- [11] E. V. Somers, "Theoretical Considerations of Combined Thermal and Mass Transfer from a Flat Plate," *ASME J. Appl. Mech.*, vol. 23, p. 295-301, 1956.