

Study of a Developed Model Describing a Vacuum Membrane Distillation Unit Coupled to Solar Energy

Fatma Khaled, Khaoula Hidouri, Bechir Chaouachi

Abstract—Desalination using solar energy coupled with membrane techniques such as vacuum membrane distillation (VMD) is considered as an interesting alternative for the production of pure water. During this work, a developed model of a polytetrafluoroethylene (PTFE) hollow fiber membrane module of a VMD unit of seawater was carried out. This simulation leads to establishing a comparison between the effects of two different equations of the vaporization latent heat on the membrane surface temperature and on the unit productivity. Besides, in order to study the effect of putting membrane modules in series on the outlet fluid temperature and on the productivity of the process, a simulation was executed.

Keywords—Vacuum membrane distillation, membrane module, membrane temperature, productivity.

I. INTRODUCTION

WATER scarcity in the world requires that many solutions must be taken to solve this problem. Membrane distillation (MD) is a promotive technology to act on this problem. MD is a thermal process which is based on the vapor/liquid separation in the interface of a selective membrane and which requires the heating of the supply feed solution [1]. The advantage of this thermal process is the ability to collect it with another energy source as solar energy or geothermal energy [2]. Wherefore, several MD units coupled to solar energy are planted in several countries [3], [4]. However, the MD has different configurations which are: direct contact membrane distillation (DCMD), VMD, air gap membrane distillation (AGMD), sweeping gas membrane distillation (SGMD) [5]. Each one of those configurations is characterized by its different method for condensing on the permeate side. Among these most used MD configurations, VMD allows obtaining a partial pressure gradient across the membrane upper than that achieved with other configurations [6] which allow obtaining upper distillate water. VMD coupled with solar energy is a hybrid technology for desalinating the seawater and brackish water for the production of great purity water. This process is based on a vapor pressure gradient created by the heating feed water and the vacuum inside the membrane [7]. Also, the favor of this process is its ability to operate at a temperature easily reached

F. Khaled is with the laboratory of Energy, Water, Environment and Processes, National Engineering School of Gabes, University of Gabes, Tunisia (corresponding author, phone: 00216-95886666; e-mail: fatma90khaled@gmail.com).

K. Hidouri and B. Chaouachi are with the laboratory of Energy, Water, Environment and Processes, National Engineering School of Gabes, University of Gabes, Tunisia (e-mail:coordinateumaster@gmail.com, bachir.chaouachi@enig.rnu.tn).

which is in the range of 60-90°C [8].

Industrial membranes are made according to different typical geometries, and the frequently used in the MD process are the plate and frame, tubular, spiral wound and hollow fiber membrane modules [9].

The MD used a selective membrane to ensure vapor penetration only into the pores. For VMD, the membrane must be hydrophobic and microporous. For this reason, several materials are used for the manufacture of those selective membranes. Nowadays, the most used hydrophobic membrane materials are PTFE, polyvinylidene fluoride (PVDF) and polypropylene (PP) [10].

In this work, a mathematical model of hollow fiber membrane module was developed. The membrane module is a part of a VMD unit coupled to a solar collector. The MATLAB software was used to achieve a numerical simulation program which allows studying different critical parameters as the surface membrane temperature T_m , the feed out temperature T_{fout} and the productivity of the hollow fiber membrane module.

II. DEVELOPED MODEL

A. Unit Description

Fig. 1 presents the schematic diagram of the VMD unit connected to solar energy. The objective of this unit is to heat the seawater entering the membrane module by a flat solar collector by means of a plate heat exchanger. After the passage of the vapor through the pores of the hydrophobic membrane, a base pressure force or depression is exerted on the permeate side. The obtained permeate is condensed outside the membrane module.

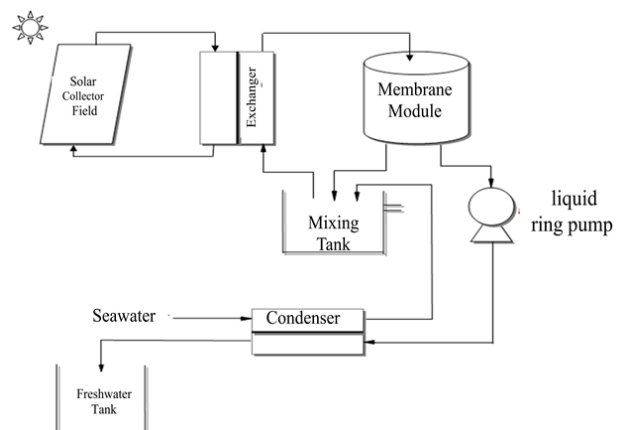


Fig. 1 VMD unit collected to solar energy

B. Modeling

Based on several thermal equations, a mathematical model of the membrane module connected to a solar collector was carried out. However, several equations describing the total heat and mass transfer mechanism of VMD, taking into consideration the polarization of temperature, was represented as follows:

C. Mass Transfer of Membrane Module

The mass transfer for the VMD process and the vapor transfer through the hydrophobic membrane pores are controlled by the Knudsen number Kn which is defined as [11]:

$$K_n = \frac{\lambda}{d_p} \quad (1)$$

where d_p is the pore size of the membrane and λ is the mean free path of the transported molecules (m) which is calculated by [12]:

$$\lambda = \frac{k_B T_f}{\sqrt{2\pi P \sigma^2}} \quad (2)$$

where k_B and σ are the Stefan-Boltzmann constant ($W/m^2.K^4$) and the collision diameter of the water vapor (\AA), respectively, and \bar{P} is the pores mean pressure of the membrane (Pa).

According to the calculation of the Knudsen number Kn, the transfer of the water vapor across the membrane pores is governed by the Knudsen diffusion, the viscous flow or the combine of the both of them as explained in the following:

The Knudsen diffusion is dominated for $Kn > 10$ and the diffusion coefficient (s/m) is calculated by [13]:

$$K_{Knudsen} = \frac{8}{3} \frac{r \varepsilon}{\tau \delta} \sqrt{\frac{1}{2\pi R M T_m}} \quad (3)$$

The viscous flow is dominated for $Kn < 0.01$ and the diffusion coefficient (s/m) is calculated by [13]:

$$K_{viscous} = \frac{1}{8\eta} \frac{r^2 \varepsilon}{\tau \delta} \frac{\bar{P}}{R T_m} \quad (4)$$

The combination of viscous flow and Knudsen diffusion dominates if $0.01 < Kn < 10$ and in this case the diffusion coefficient (s/m) is calculated by [13]:

$$K_m = K_{Knudsen} + K_{viscous} \quad (5)$$

r is the pore radius (m), ε is the porosity (%), δ is the thickness (m) and τ is the tortuosity (%), respectively. More, M_w is the molar mass of water ($Kg/Kmol$), R is the gas constant ($J/Kmol.K$) and T is the absolute temperature (K). Therefore,

the mass flux of water ($kg/m^2.h$) for the VMD process is defined by [14]:

$$J = K_m (P_m - P_v) \quad (6)$$

where P_m refers to the saturated vapor pressure (Pa) at the membrane surface and P_v refers to downstream pressure on the permeate side (Pa).

D. Heat Transfer of Membrane Module

To quantify the heat transfer in the hollow fiber VMD process, the heat transfer stream of the feed between the bulk and the boundary layer [15] can be defined by:

$$Q_f = h.(T_f - T_m) \quad (7)$$

where T_f , T_m and h are the temperature of the bulk at feed side ($^{\circ}C$), the temperature at the membrane surface ($^{\circ}C$) and the heat transfer coefficient in the feed side ($W/m^2.K$), respectively. The heat conduction through the membrane can be neglected because the temperatures on the two sides of the membrane are the same.

The heat transfer by the movement of vapor across the membrane (Q_m) [15] can be given by:

$$Q_m = J.\Delta H_v \quad (8)$$

where J is the mass flux of water ($kg/m^2.h$) and ΔH_v is the latent heat of vaporization (J/Kg) which is described in the literature by [10]:

$$\Delta H_v = 1.7535 T + 2024.3 \quad (9)$$

Montégut presented another method for the calculation of vaporization latent heat [16] as:

$$\Delta H_v = 2501.6 - 2.363.T \quad (10)$$

The heat flow exchanger area is calculated from the heat balance of inlet and outlet temperatures of the module as [17]:

$$Q_{rec} = \dot{F}.C_p.(T_f - T_{fout}) \quad (11)$$

where \dot{F} is flow rate (Kg/s), C_p is the calorific capacity ($J/Kg.^{\circ}C$) and T_{fin} , T_{fout} are the inlet and outlet temperatures ($^{\circ}C$) of the membrane module respectively.

At a steady state, for the VMD process, the global heat transfer flux across the membrane Q is given by [15]:

$$Q = Q_f = Q_m = Q_{rec} \quad (12)$$

Depending on the driving force applied on the both of the membrane systems, the polarization phenomenon could be also a temperature polarization [14]. The temperature polarization coefficient for the VMD process can be calculated by the ratio of the varied temperature across the membrane

[18]:

$$\text{TPC} = \frac{T_m}{T_f} \quad (13)$$

where T_m and T_f are the temperature of the membrane interface and the temperature of the feed bulk, respectively.

III. STUDIED RESULTS

After modeling the VMD process that takes into account the temperature polarization, a system of different equations was established. It was solved with the Matlab software as a function of inlet temperature and considering water as feed. During each resolution of the equations, certain parameters have been modified. The main objective of these simulation studies was to study, firstly, the effect of the latent heat of vaporization on the fluid temperature at the membrane surface, the fluid temperature at the membrane module outlet and the productivity profile of permeate and secondly the effect of putting membrane modules in series on the productivity of the process.

The hollow fiber membrane module (PTFE) considered was equipped with 806 fibers, with 4 m² of the area and 1.129 m module length. The membrane properties used in the model were: pore size 0.1495 μm and porosity 47%.

A. Effect of the Latent Heat of Vaporization

The membrane module was divided into two parts in such a way that the outlet of the first part is the inlet of the second part; that means as if there are two membrane modules in series. In each run, the surface membrane temperature T_m and the productivity of the hollow fiber membrane module Q_p are calculated. A comparison between the effect of the two equations of the latent heat of vaporization ΔH_v mentioned above (9), (10) is carried out.

The seawater temperature, which is the feed supply to the membrane module and which is coming from the plate heat exchanger, was taken at $T_f = 72^\circ\text{C}$, and the feed inlet velocity was kept at $V = 1\text{ m/s}$. The overall curve of the feed temperature follows the same sinusoidal rate of the solar flux as shown in Fig. 2.

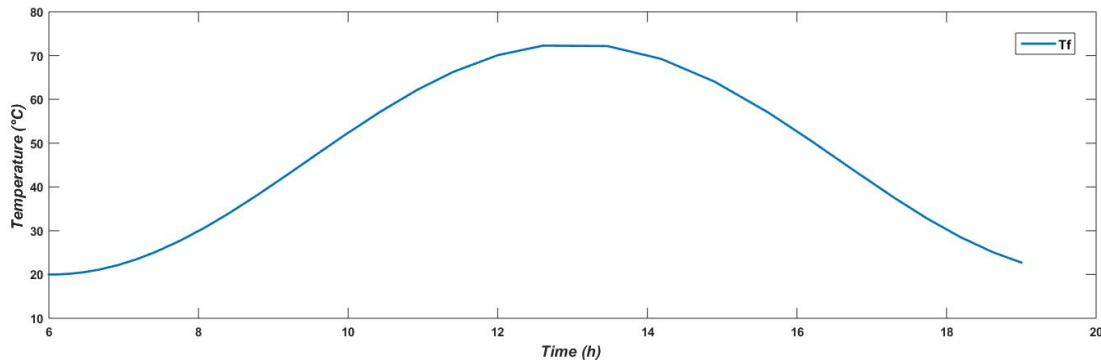


Fig. 2 Curve of feed temperature T_f (°C)

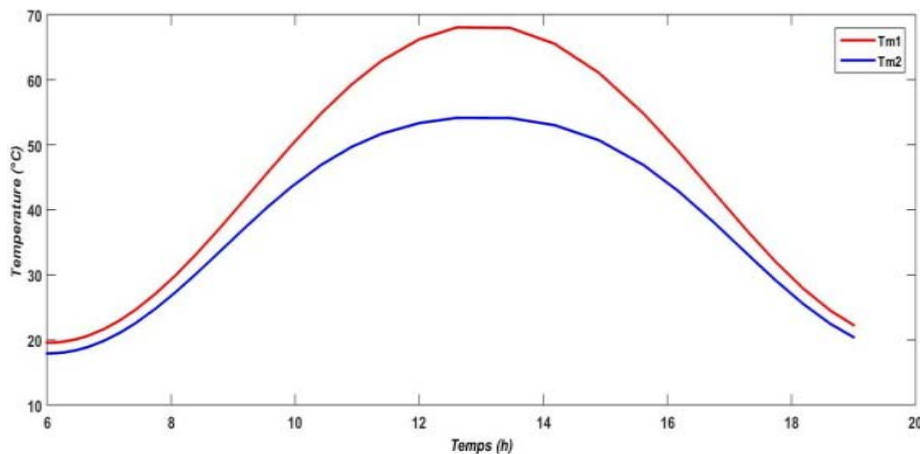


Fig. 3 Membrane surface temperature T_{m1} and T_{m2} (°C) for (9)

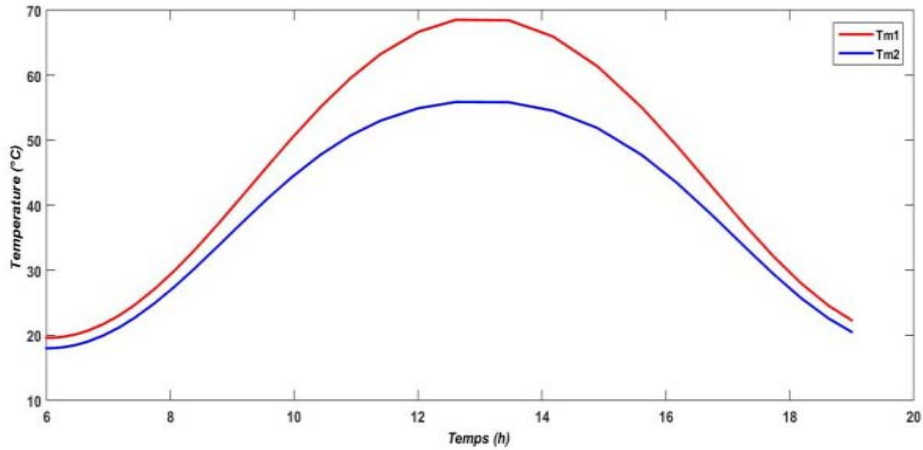


Fig. 4 Membrane surface temperature T_{m1} and T_{m2} ($^{\circ}\text{C}$) for (10)

The temperatures of the membrane surface of both parts of the membrane module T_{m1} and T_{m2} are lower than the feed temperature T_f . It can be seen in Fig. 4 that both T_{m1} and T_{m2} are higher than those of Fig. 3 and the highest difference is obtained for T_{m2} . Therefore, it indicates the importance of choosing the appropriate expression for the latent heat of vaporization ΔH_v calculation. If we compare the two expressions used for calculating ΔH_v , we can notice a different trend with the temperature: it increases with temperature with (9), while decreases with temperature with (10). The last trend is what expected and, therefore, even if both equations can be found in the literature, (10) should be preferred.

The productivity Q_t of the entire membrane module, which is the sum of the productivities of each part of the module, is influenced by the temperatures of the membrane surface.

Thus, it can be seen in Fig. 6 that the productivity of module calculated with (10) (36.8126 Kg/h) is higher than the productivity of module calculated with (9) (35.3749 Kg/h) as shown in Fig. 5.

B. Effect of Putting Modules in Series

In order to use the hot stream exiting from the module to produce more permeate, the model was run by considering an extra membrane module in series with the original one calculated above, as two membranes in series, so that there are three membrane modules in series with the same length. Equation (10) was used to calculate the latent heat of vaporization in this simulation. The feed temperature is taken as in Fig. 2.

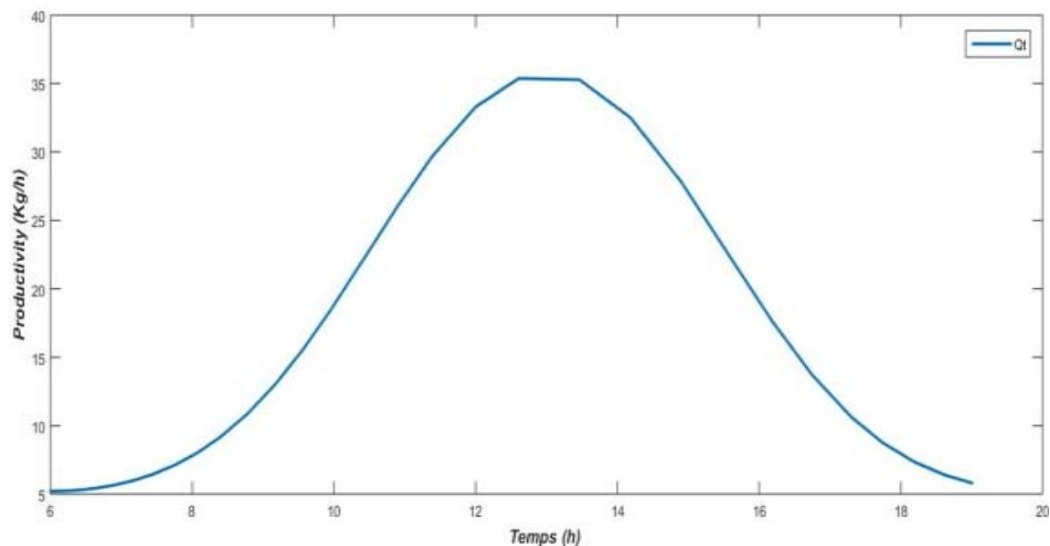


Fig. 5 Productivity Q_t (kg/h) of the entire membrane module for (9)

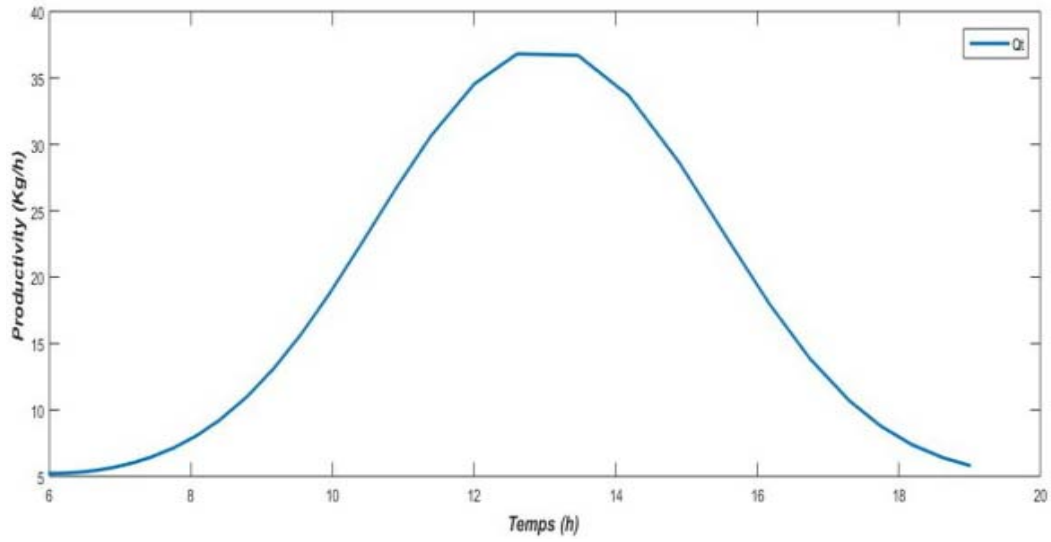


Fig. 6 Productivity Q_t (kg/h) of the entire membrane module for (10)

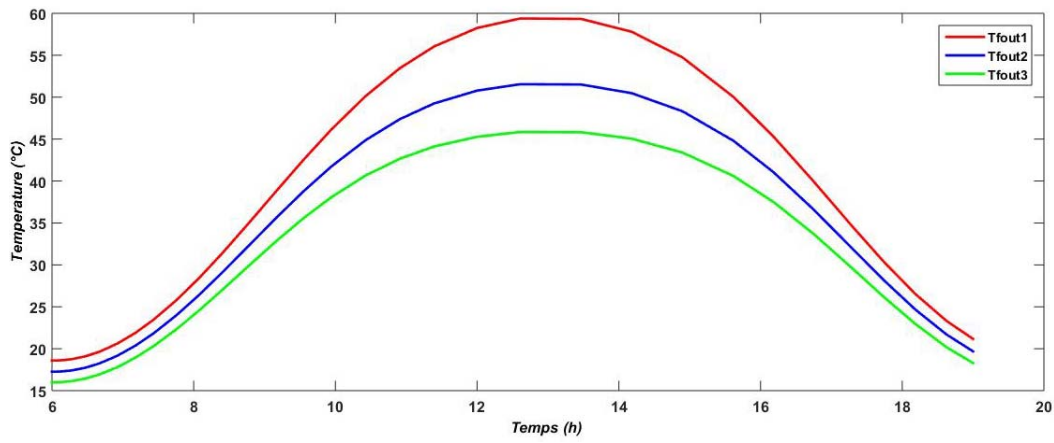


Fig. 7 The outlet temperature T_{fout} (°C) of the three modules in series

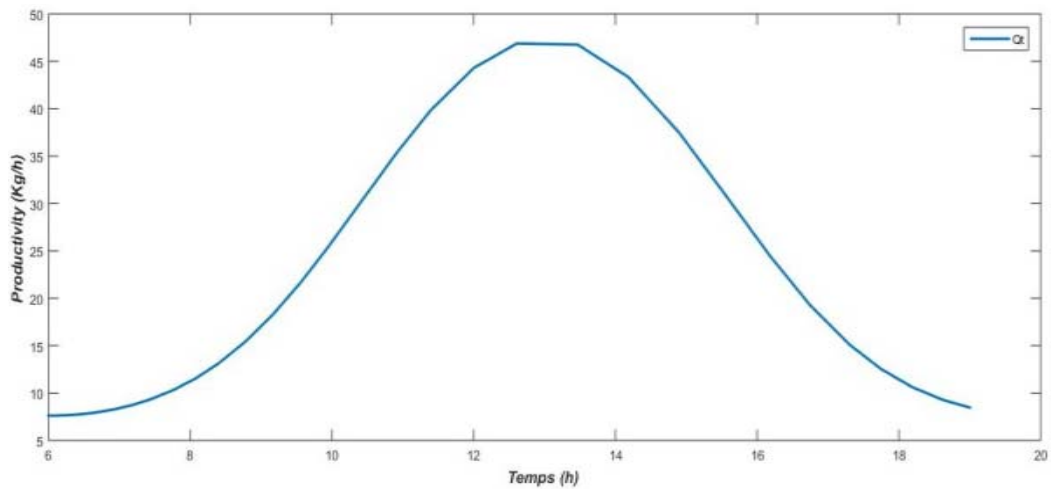


Fig. 8 Productivity Q_t (kg/h) of the three modules in series

The outlet temperature T_{fout1} represents the feed temperature for the second part of the module and T_{fout2} represents the feed temperature for the third part. It can be seen in Fig. 7 that the last outlet temperature T_{fout3} is still high, allowing to add another module in series, to further increase the permeate production.

The productivity Q_t of the three modules in series is the sum of the productivity of each module. It can be seen in Fig. 8 that the addition of a third module improved the overall permeate production from 36.8126 Kg/h to 46.8778 Kg/h.

IV. CONCLUSION

In this work, a study of a simulation of a developed model describing the operation of a VMD unit coupled to solar energy was carried out. A comparison between two equations of the latent heat of vaporization was done. Thus, an addition of another module in series proves the improvement of the productivity of the unit.

REFERENCES

- [1] M. Khayet, "Membranes and theoretical modeling of membrane distillation: A review," *Advances in Colloid and Interface Science*, 164 (November 2010), 2011, pp.56–88.
- [2] S. Ben Abdallah, N. Frikha, S. Gabsi, "Simulation of solar vacuum membrane distillation unit," *Desalination* 324, 2013, pp.87-92.
- [3] F. Banat, N. Jwaied, M. Rommel, J. Koschikowski, M. Wieghaus, "Performance evaluation of the "large SMADES" autonomous desalination solar-driven membrane distillation plant in Aqaba, Jordan," *Desalination*. 217, 2007, pp.17–28.
- [4] X. Wang, L. Zhang, H. Yang, H. Chen, "Feasibility research of potable water production via solar-heated hollow fiber membrane distillation system," *Desalination* 247, 2009, pp.403-411.
- [5] Y. Zhang, Y. Peng, Sh. Ji, Sh. Wang, "Numerical simulation of 3D hollow-fiber vacuum membrane distillation by computational fluid dynamics," *Chemical Engineering Science*, 152, 2016, pp.172-185.
- [6] Sh. Gh. Lovineh, M. Asghari, B. Rajaei, "Numerical simulation and theoretical study on simultaneous effects of operating parameters in vacuum membrane distillation," *Desalination*, 314, 2013, pp.59–66.
- [7] M. Khayet, T. Matsuura, "Membrane Distillation, principle and applications," Elsevier B.V, 2011.
- [8] H.E.S. Fath, S.M. Elsherbiny, A.A. Hassan, M. Rommel, M. Wieghaus, J. Koschikowski, M. Vatansver, "PV and thermally driven small-scale, stand-alone desalination systems with very low maintenance needs," *Desalination*, 225, 2008, pp.58–69.
- [9] P. Onsekizoglu, "Membrane Distillation: Principle, Advances, Limitations and Future Prospects in Food Industry," *Distillation - Advances from Modeling to Applications*, 2012, Dr. S. Zereszki (Ed.), ISBN: 978-953-51-0428-5, InTech, Available from: <http://www.intechopen.com/books/distillation-advances-from-modeling-to-applications/membrane-distillation-principle-advances-limitations-and-future-prospects-in-food-industry>
- [10] H. Zhang, M. Liu, D. Sun, B. Li, P. Li, "Evaluation of commercial PTFE membranes for desalination of brine water through vacuum membrane distillation," *Chemical Engineering and Processing*. 110, 2016, pp.52–63.
- [11] K. Chiam, Ch. R. Sarbatly, "Study of the rectangular cross-flow flat-sheet membrane module for desalination by vacuum membrane distillation," *Chemical Engineering and Processing*. 102, 2016, pp.169–185.
- [12] J. Liua, H. Guoa, M. Liua, W. Zhanga, K. Xua, B. Li, "Mass transfer in hollow fiber vacuum membrane distillation process based on membrane structure," *Journal of Membrane Science*. 532, 2017, pp.115–123.
- [13] Y. Zhang, Y. Peng, Sh. Ji, Sh. Wang, "Numerical simulation of 3D hollow-fiber vacuum membrane distillation by computational fluid dynamics," *Chemical Engineering Science*. 152, 2016, pp.172–185.
- [14] A.S. Alsaadi, L. Francis, G. L. Amy, N. Ghaffour, "Experimental and theoretical analyses of temperature polarization effect in vacuum membrane distillation," *Separation and Purification Technology*. 142, 2015, pp.48-64
- [15] A. Alkhdhiri, N. Darwish, "Membrane distillation: A comprehensive review," *Desalination*. 287, 2012, pp.2–18.
- [16] G.C. Montégut, "Propriétés physique de l'eau de mer," Available from: http://space-nation.org/images/3/38/Propri%C3%A9t%C3%A9s_physiques_de_l%27eau_de_mer.pdf
- [17] I. Hitsov, T. Maere, K. De Sitter, C. Dotremont, I. Nopens, "Modelling approaches in membrane distillation: A critical review," *Separation and Purification Technology*. 142, 2015, pp.48–64.
- [18] A.S. Alsaadi, L. Francis, G. L. Amy, N. Ghaffour, 2014. "Experimental and theoretical analyses of temperature polarization effect in vacuum membrane distillation," *Journal of Membrane Science*. 471, 2014, pp.138–148.